


MODEL RTA-737DL

ASSEMBLY INSTRUCTIONS

Thank you for purchasing our product.

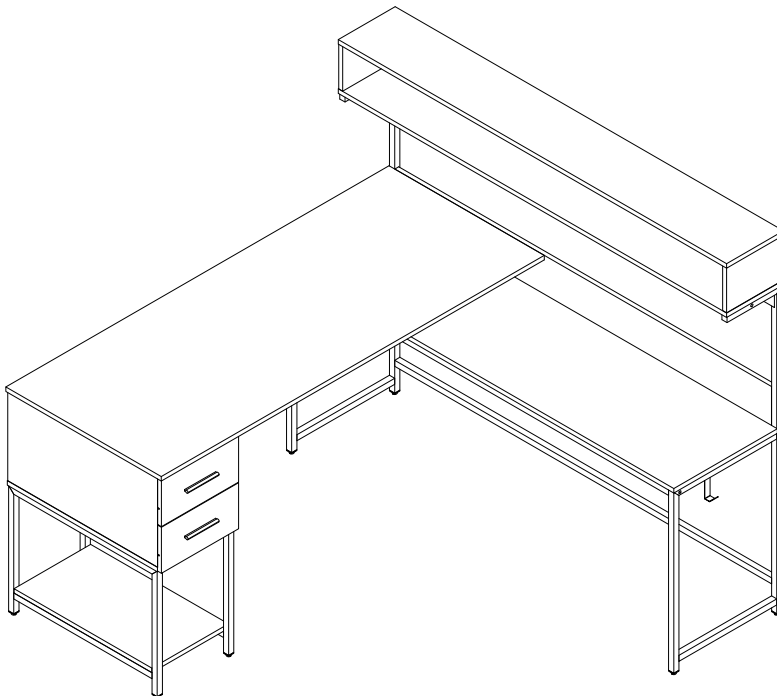

REV.PFT-6378-0221-0





- Please read carefully the assembly instructions before the installation.








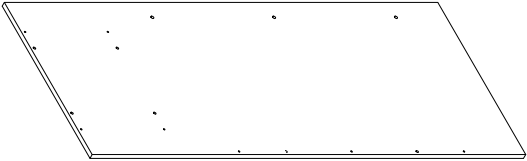










- Do not discard this manual or any of the packaging material until the unit has been completely assembled.









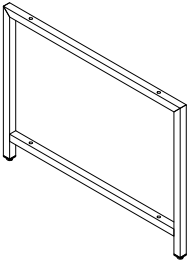
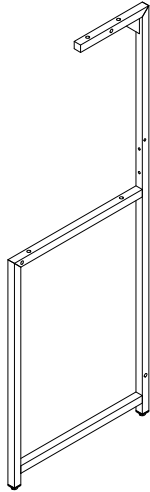
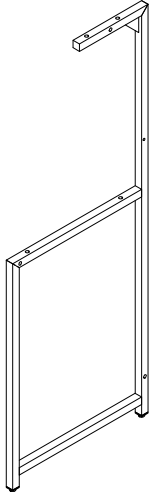



- Might require two people.








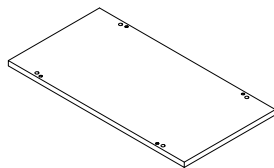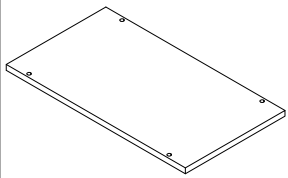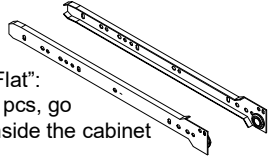





MAIN PARTS LIST

<p>1 Left cabinet leg x2</p> 	<p>2 Left frame x1</p> 	<p>3 Right frame x1</p> 	<p>4 Left-top-front tube x1</p> 
<p>7 Earphone hook x1</p> 			<p>5 Right-top and front-tube x2</p> 
		<p>6 Right-bottom-back tube x1</p> 	
<p>8 Left tabletop x1</p> 	<p>9 Right back panel x1</p> 		
<p>10 Top shelf top panel x1</p> 	<p>11 Left back panel x1</p> 		
<p>12 Right tabletop x1</p> 	<p>13 Top shelf bottom panel x1</p> 		
<p>14 Top shelf back panel x1</p> 	<p>15 Top shelf left panel x1</p> 	<p>16 Top shelf right panel x1</p> 	



MAIN PARTS LIST

17 Left cabinet left panel x1 	18 Left cabinet right panel x1 	19 Left cabinet back panel x1 	20 Left cabinet bottom panel x1 
21 Left bottom accessory shelf x1 	22 Drawer front panel x2 	23 Drawer left panel x2 	24 Drawer right panel x2 
25 Drawer back panel x2 	26 Drawer bottom panel x2 	27 Drawer sliders*, each set of 4 pcs x2 sets <p>* Screws I come packaged together with these pieces.</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>"Flat": 2 pcs, go inside the cabinet</p>  </div> <div style="text-align: center;"> <p>"L shaped": 2 pcs, go on the drawers</p>  </div> </div>	

LIST OF HARDWARE, SCREWS AND FITTINGS

PART	QTY	ITEM		PART	QTY	ITEM	
A	32	M5x40 Bolt		H	4	M4x18	
B	32	Ø15x12mm Cam lock		I	*16	M3.5x14	* These screws come packaged together with the sliders #27. 
C	30	M5x40		J	2	96mm Handle	
D	25	M6x30		K	7	Ø18mm Plastic adhesive hole cover	
E	1	M6x12			1	Screwdriver	
F	8	M6x40			1	M6 Allen Wrench	
G	6	Ø8x40mm					

MAIN PARTS LAYOUT (FOR REFERENCE):

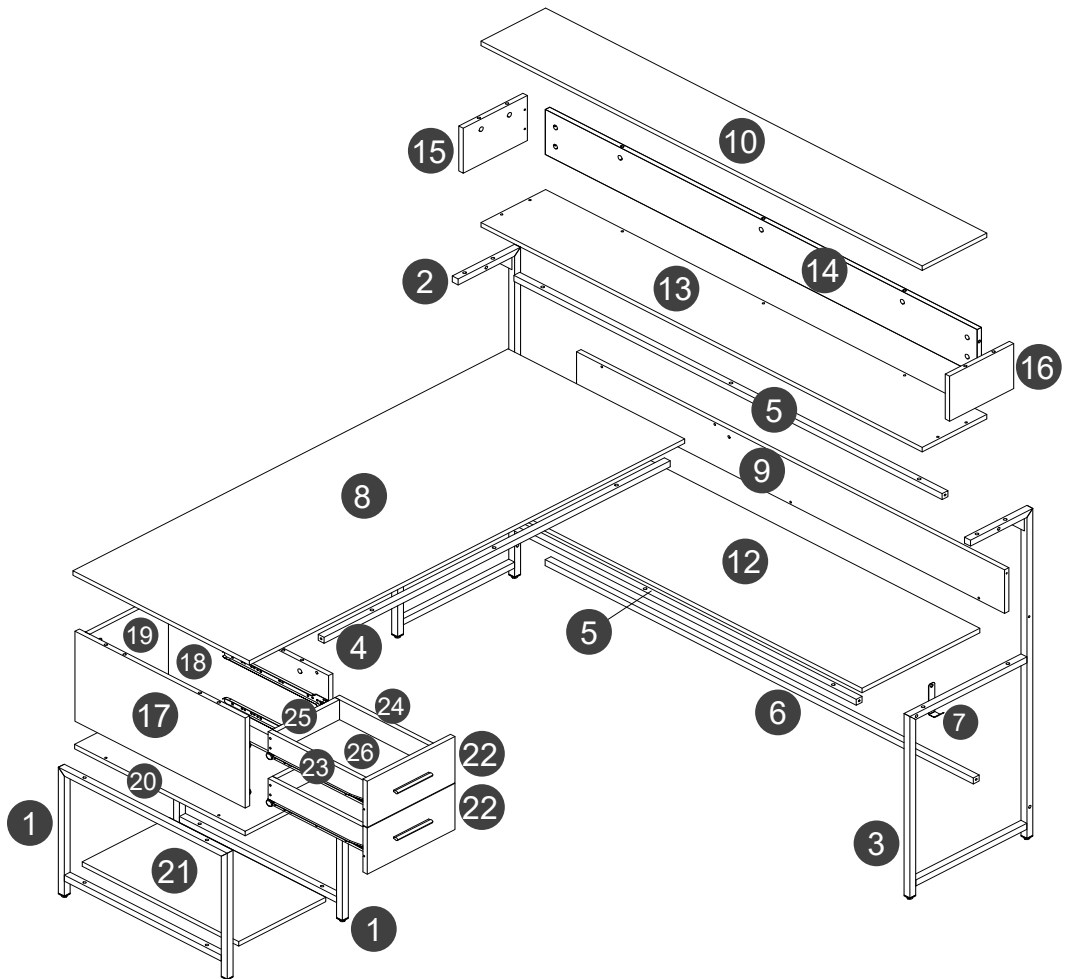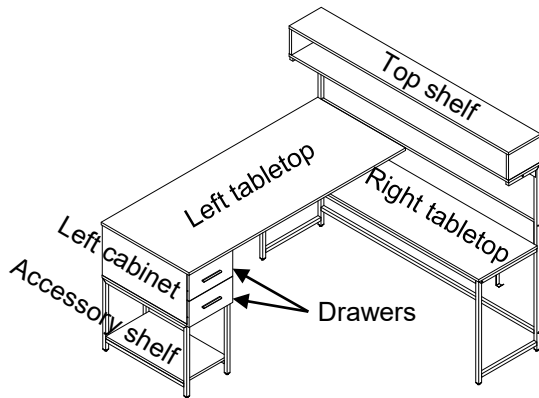


☛ This unit uses cam bolts and locks. The following explains how to use them. This is not an assembly step; it is a guide for when you are actually doing the assembly using this kind of hardware.


Cam Lock




Cam Bolt



1. Screw the bolt into the corresponding hole on panel "A".

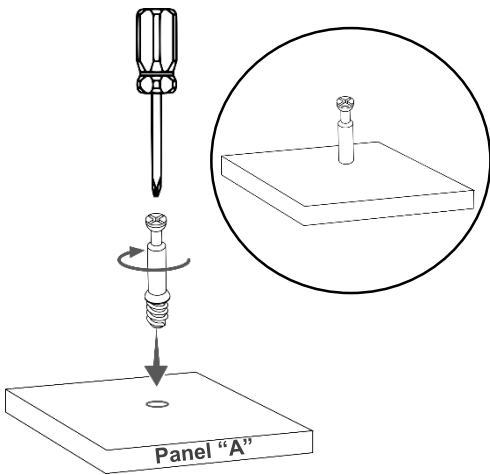


2. Join panel "B" to panel "A". If panel "B" comes with the cam lock pre-installed, make sure it is aligned to receive the bolt's head (refer to point 3). There might be a very small gap between the panels which is normal.

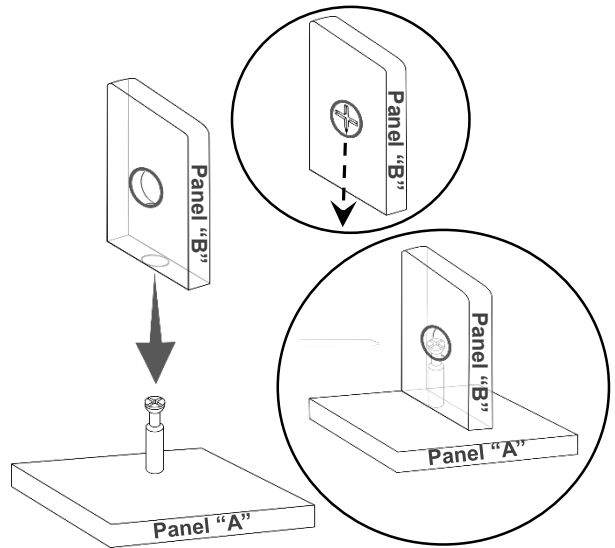


3. Insert the cam lock on panel "B" making sure it goes aligned to receive the bolt's head.

Alignment: The cross points towards the panel "A" with the bolt.

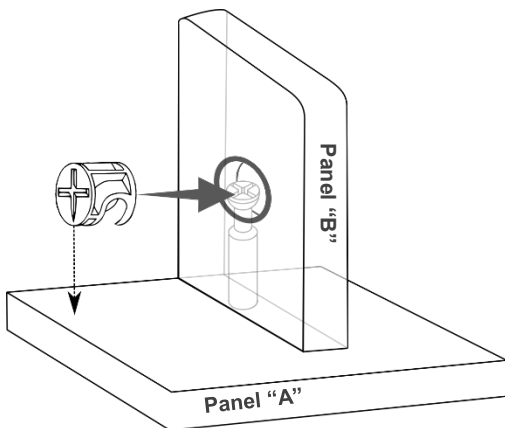

4. Turn the cam lock clockwise. This will lock the parts together and will close any gaps.

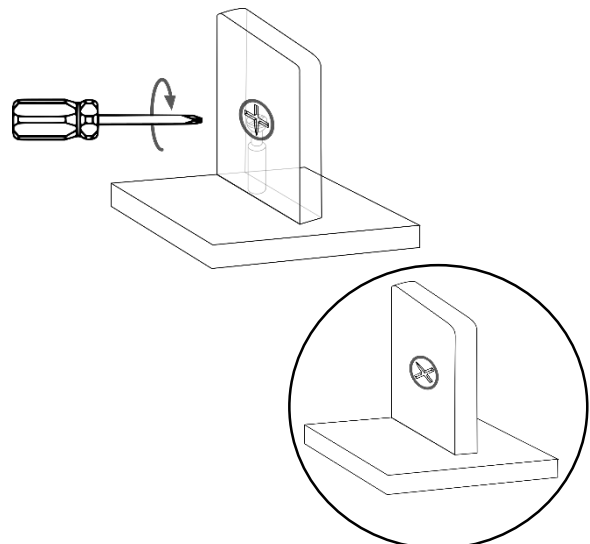


BEFORE YOU START THE ASSEMBLY, PLEASE READ THE FOLLOWING TIPS AND WARNINGS.

1 Do a quick inventory to make sure the package contains all the parts and hardware listed in the assembly instructions.




7 To avoid misalignments, always leave the screws loose and tighten them until all pieces are positioned correctly.



2 Missing, damaged and defective parts can be replaced at no cost to you. Please refer to the last pages on this manual.



8 Do not overtighten or force the screws as they might break, strip, damage the threads of the holes or get stuck inside the part.



3 The replacement parts service is limited to the 48 contiguous United States. If you reside in Alaska, Hawaii, Puerto Rico, U.S. territories or other countries, please contact the supplier from where the unit was purchased.



9 Sometimes the laminate might cover partially or entirely the hole on a panel. If there is no visible hole for the screw, pass and press the tip of your finger over the area where the hole should be located to feel the indentation, and once found, carefully pierce the laminate to reveal the hole underneath.




4 If during assembly you find an issue or need clarification, please contact our Customer Service for assistance. Please refer to the last pages on this manual.




5 On each step read the instructions and analyze the illustrations thoroughly before proceeding to do the assembly.



10 If the hole seems too small for the screw, first make sure you are using the correct size of screw and that it's been installed in the correct hole. If the hole still appears to be too small, carefully pierce the laminate to reveal the hole's actual size.

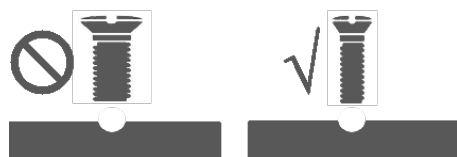

6 Make sure you understand which hardware will be used on each step. Using the wrong size of screw, bolt or pin might strip the threads or cause damage to the part in which it is being used.




ASSEMBLY STEPS


STEP 1

Grab all the sets of sliders **27** and separate them into 2 groups according to their shape:

- The "Flat" ones will be used on the next step.
- The "L Shaped" will be used until step **23**, set them aside.

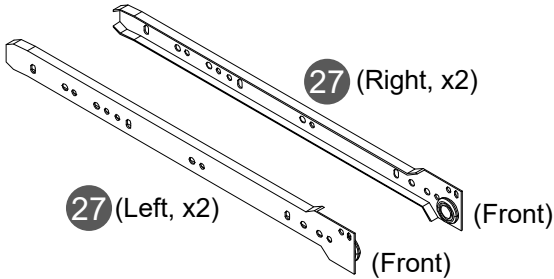


The "Flat" ones will be used on step **2**.

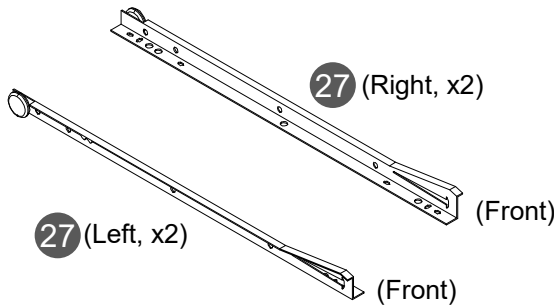

The "L-Shaped" will be used on step **23**, set them aside.





STEP 2

Hardware:






Assemble the "Flat" sliders **27** to the left cabinet side panels **17** and **18** with screws **I**, making sure the wheel faces towards the front of the panels.

Please note the sliders attach at the front on the 4th hole and the wheel faces down with 2 empty holes above the wheel.

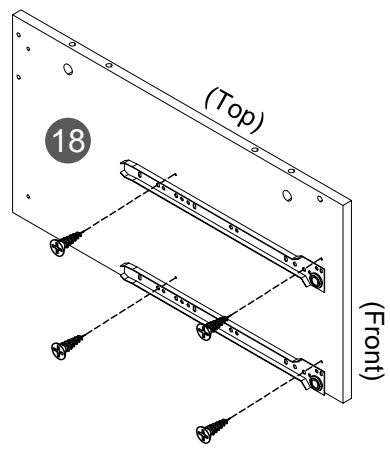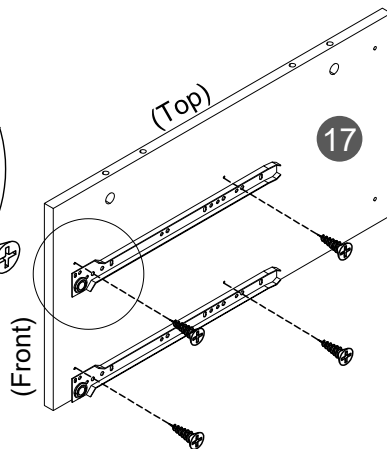
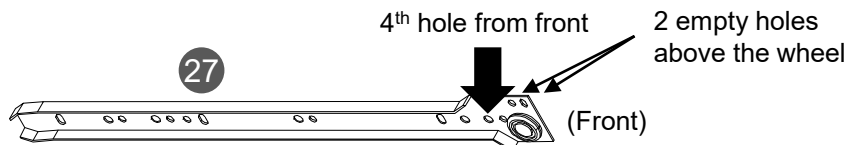


STEP 3

Hardware:



A	 M5x40 Bolt	4 Pcs
B	 Cam lock	4 Pcs
		

- Attach the bolts **A** into the indicated holes on panels **17** and **18**.
- Join panels **17** and **18** to panel **19**.
- Insert the cam locks **B** on panel **19** and turn them to lock the pieces as explained in page **5**.

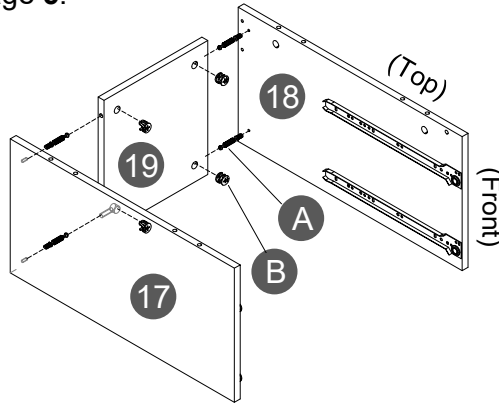


STEP 4

Hardware:



C	 M5x40	4 Pcs
		

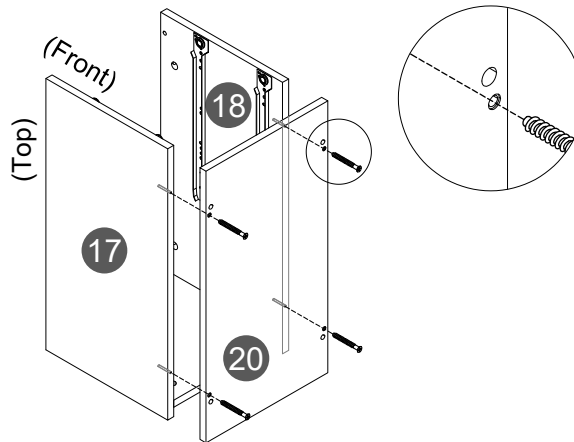Assemble the cabinet bottom panel **20** to the side panels **17** and **18** with screws **C** through the indicated holes from underneath.




STEP 5

Hardware:



D	 M6x30	4 Pcs
		

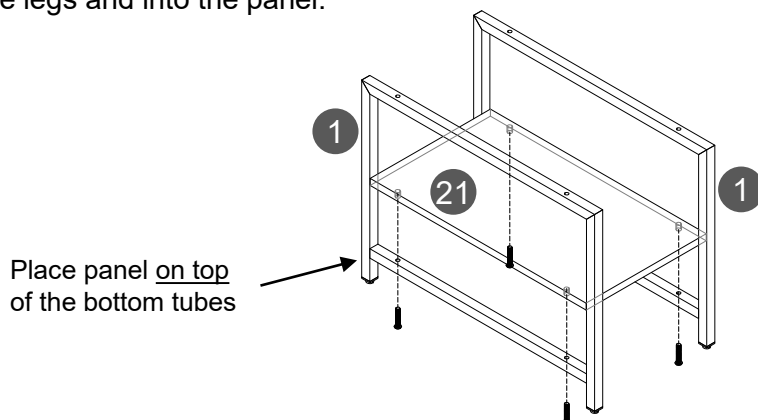Place the accessory shelf **21** on top of the bottom tubes of the cabinet legs **1** and assemble it with screws **D** from underneath. The screws go through the legs and into the panel.




STEP 6

Hardware:



D		4
	M6x30	Pcs
		

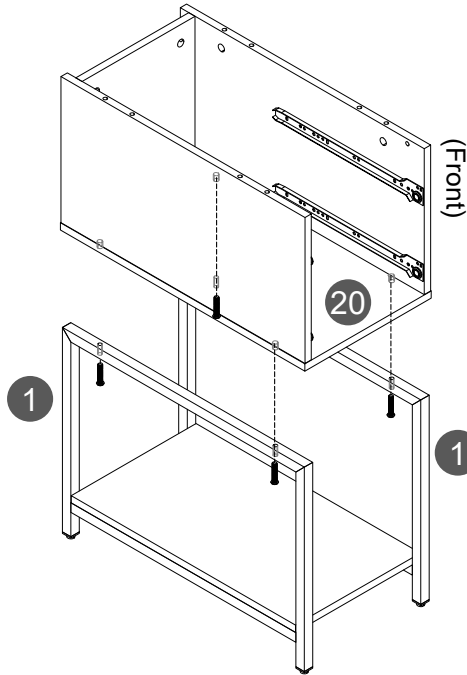Place the cabinet built in step 4 over the legs 1 and assemble the bottom panel 20 with screws D from underneath. The screws go through the legs and into the panel.





STEP 7


Hardware:

C		3
	M5x40	Pcs
D		3
	M6x30	Pcs

- Assemble the right back panel 9 to the right tabletop 12 with screws C from behind.
- Assemble the right front tube 5 to the tabletop 12 with screws D at the front and from underneath.



These holes must stay on the left side, they are needed for step 10

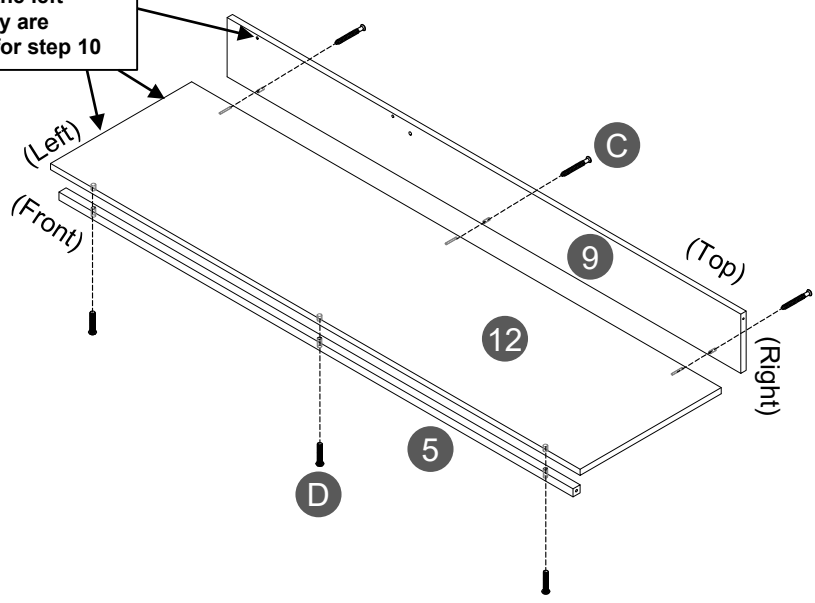


STEP 8

Hardware:



E		1
	M6x12	Pc
		

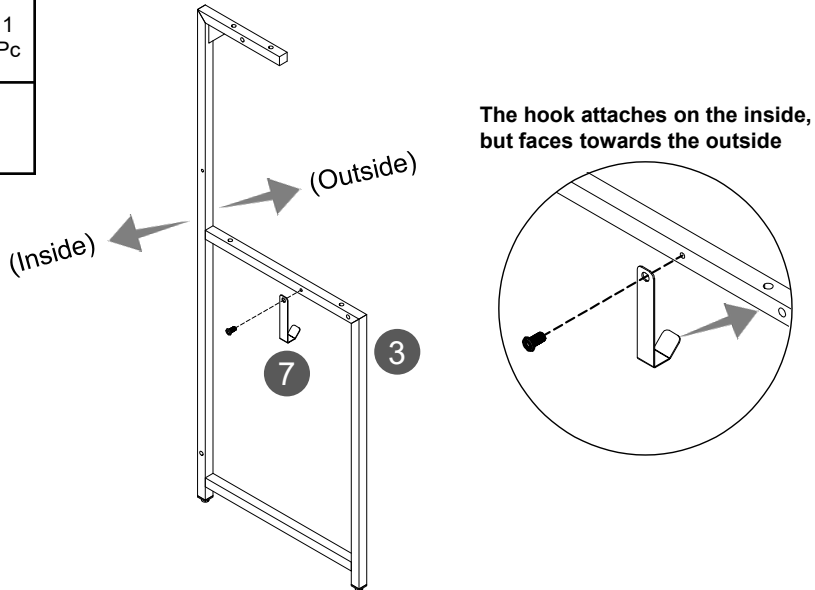Attach the hook **7** to the right frame **3** with screw **E**, but pay attention to the orientation of the hook.





STEP 9

Hardware:

C		2
	M5x40	Pcs
F		6
	M6x40	Pcs


With the help of another person, and following this order:

- Assemble the frame **3** to the tubes **6** and **5** (one tube **5** is already attached to tabletop **12**) on the right side with screws **F**.
- Assemble the left frame **2** to those same tubes on the left side with screws **F**.
- Secure panel **9** to both frames on both sides with screws **C**.

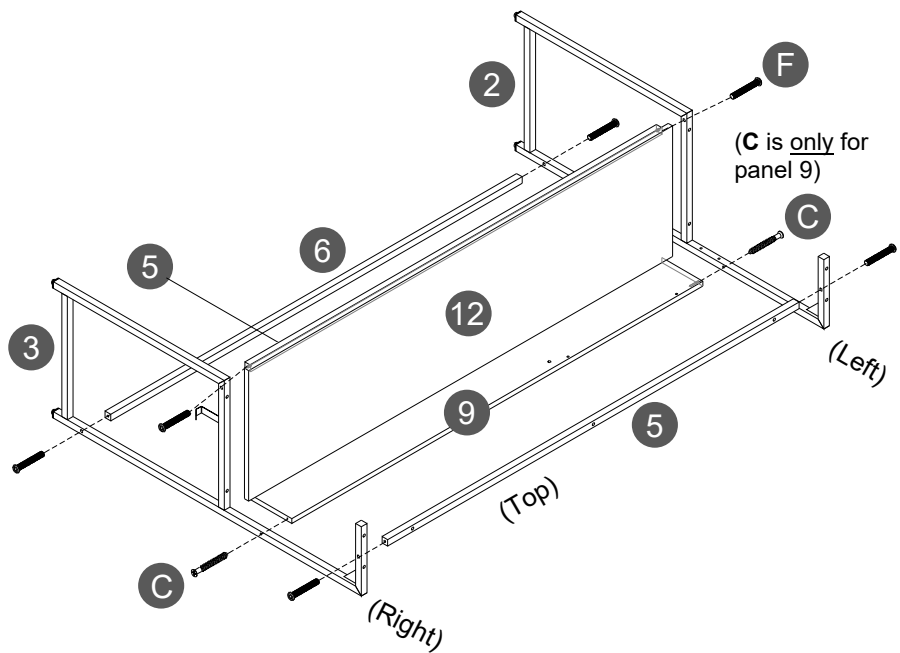


STEP 10



Hardware:

A		2 Pcs
----------	---	-------

D		4 Pcs
----------	---	-------



- With the help of another person, bring the structure built in step 9 to the upright position.
- Secure the tabletop **12** to the frames **2** and **3** with screws **D** from underneath.
- Attach the bolts **A** to the tabletop **12** on the left side.

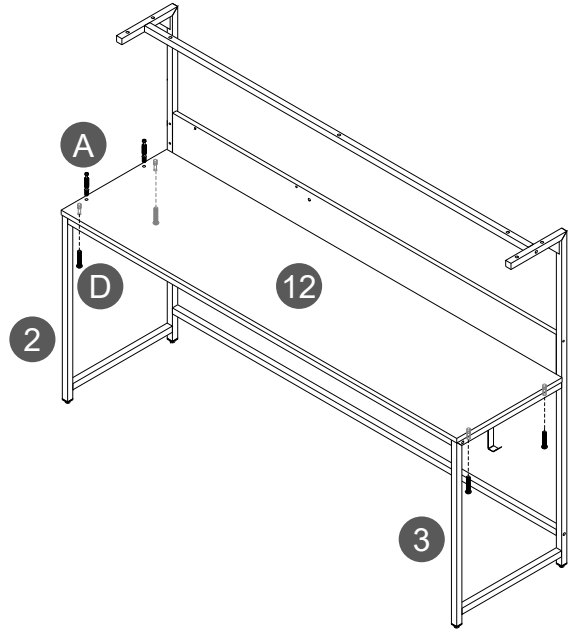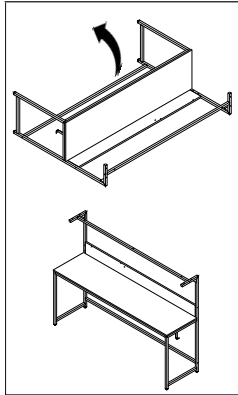


STEP 11





Hardware:

B		2 Pcs
----------	---	-------

C		2 Pcs
----------	---	-------



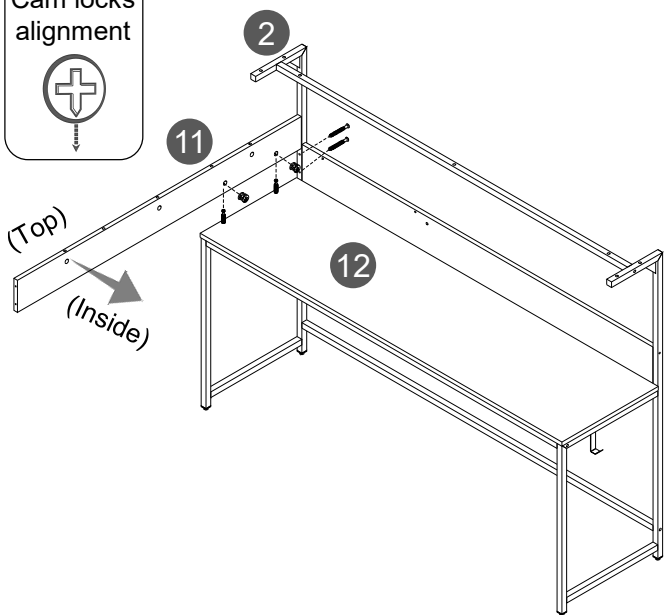


- Join panel **11** to tabletop **12**.
- Insert the cam locks **B** into panel **11** and turn them to lock the pieces as explained in page 4.
- Secure panel **11** to frame **2** with screws **C** from behind.




STEP 12

Hardware:

C		2
	M5x40	Pcs
F		2
	M6x40	Pcs





- Assemble the tube **4** to panels **9** and **18** with screws **F**.
- Assemble the panel **18** to panel **11** with screws **C**.

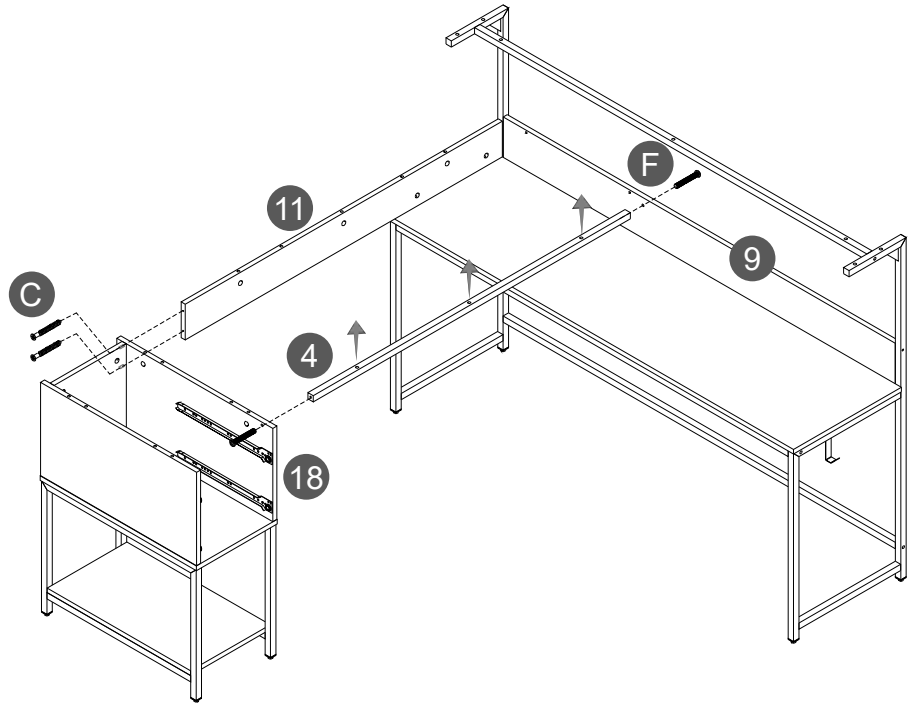


STEP 13

Hardware:

A		7
	M5x40 Bolt	Pcs
G		6
	Dowels	Pcs



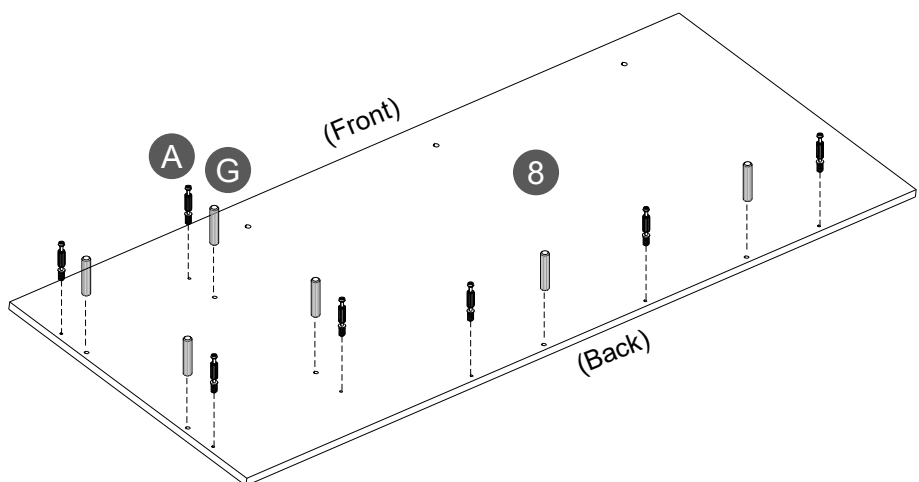



Install bolts **A** and dowels **G** into the indicated holes on the left tabletop **8**.



STEP 14

Hardware:


B	 Cam locks	7 Pcs
C	 M5x40	2 Pcs
D	 M6x30	3 Pcs



Cam locks alignment



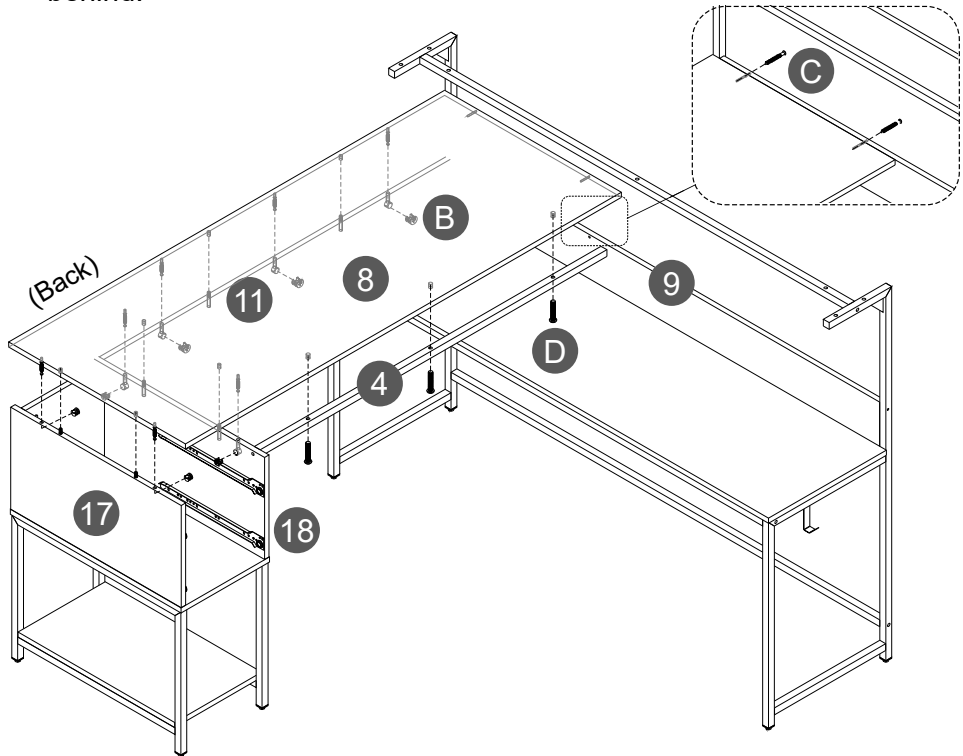

- With the help of another person, place the left tabletop **8** over the unit on the left side.
- Insert the cam locks **B** into panels **11**, **17** and **18**, and turn them to lock the pieces as explained in page **5**.
- Secure the left tabletop **8** to the tube **4** with screws **D** from underneath.
- Secure the left tabletop **8** to the back panel **9** with screws **C** from behind.




STEP 15

Hardware:

A	 M5x40 Bolts	4 Pcs
B	 Cam locks	4 Pcs



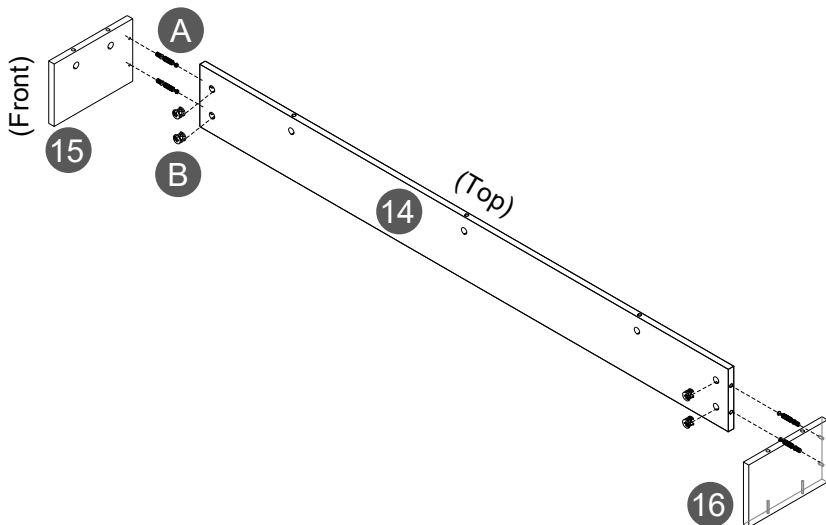

Assemble the top shelf side panels **15** and **16** to the top shelf back panel **14** with Bolts **A** and cam locks **B** as explained in page **5**.




STEP 16

Hardware:




C		7 Pcs
	M5x40	
		

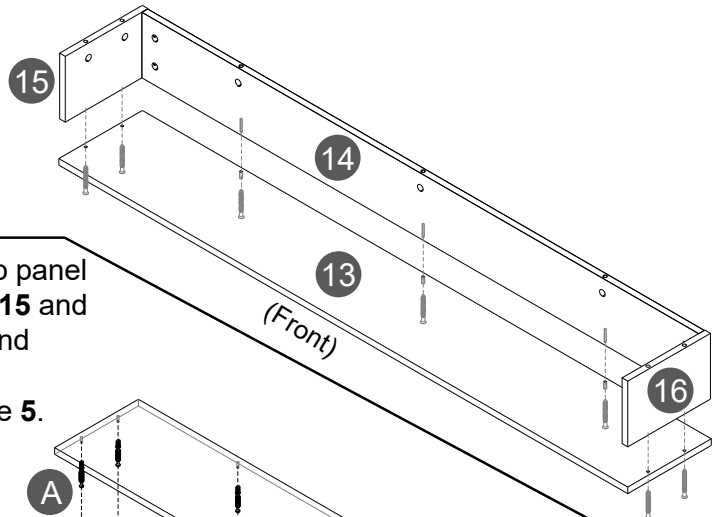Assemble the bottom panel **13** to panels **14**, **15** and **16** with screws **C**.





STEP 17

Hardware:




A		7 Pcs
	M5x40 Bolts	
B		7 Pcs
	Cam locks	
		

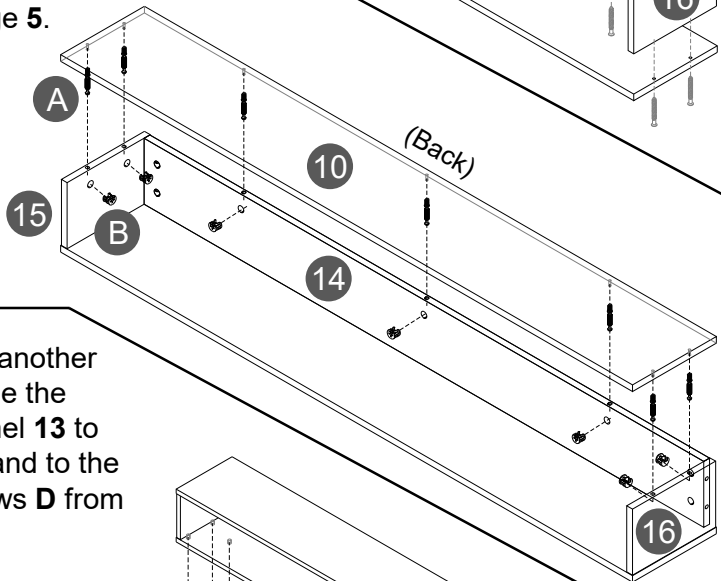Assemble the top panel **10** to panels **14**, **15** and **16** with bolts **A** and cam locks **B** as explained in page 5.




STEP 18

Hardware:




D		7 Pcs
	M6x30	
		
		

With the help of another person, assemble the shelf bottom panel **13** to frames **2** and **3** and to the tube **5** with screws **D** from underneath.

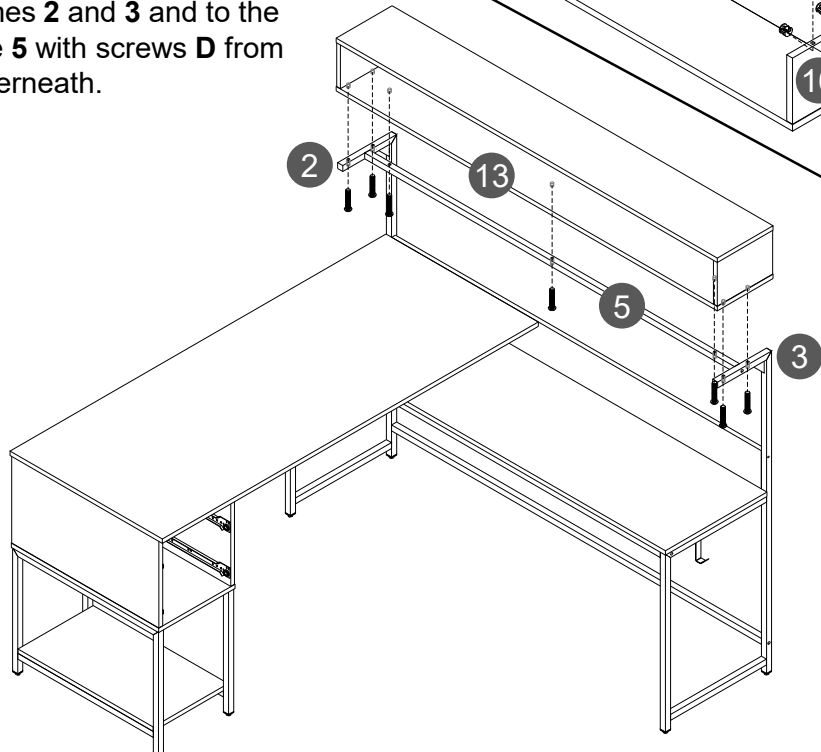


STEP 19

Hardware:




For each of the 2 drawers, assemble the side panels **23** and **24** to the front panel **22** with bolts **A** and cam locks **B** as explained in page 4.

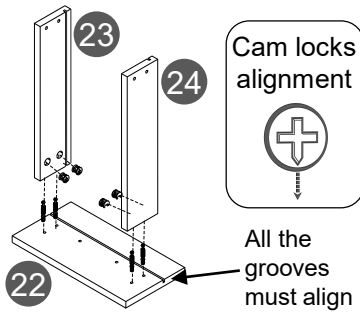



STEP 20

For each of the 2 drawers, slide the bottom panel **26** through the grooves of the side panels and into the front panel as shown.




STEP 21

Hardware:





For each of the 2 drawers, assemble the back panel **25** to the side panels **23** and **24** with screws **C**.

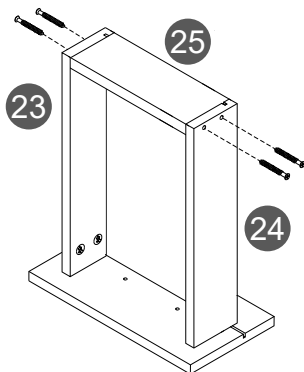


STEP 22

Hardware:





For each of the 2 drawers, assemble the handle **J** to front panel **22** with screws **H**.

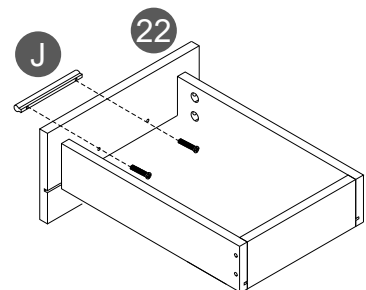


STEP 23


Hardware:




For each of the 2 drawers, flip upside-down and assemble the "L" sliders **27** with screws **I**, making sure the wheel goes towards the back, and that they don't protrude, otherwise, the drawer raises 1" and won't fit in the cabinet.

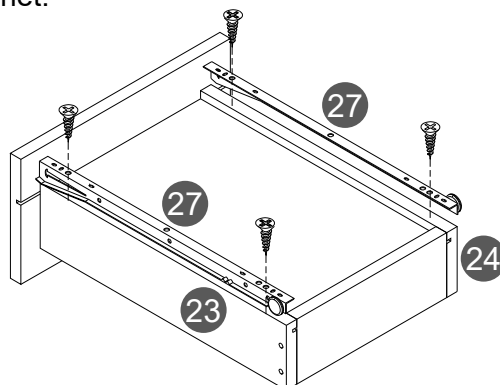

When finished, the sliders should look like this from the back of the drawer:



The assembly below is incorrect, it raises 1" and the drawer won't fit:







STEP 24

Hardware:

K

7
Pcs

- Cover the cam locks on the inside of the top shelf with stickers **K**.
- Insert the drawers into the cabinet, first the bottom one, then the top one. Insert at an angle with their fronts facing down, making sure the wheels from the drawer slide in the middle of the sliders inside the cabinet.
- If the top drawer doesn't fit, review the assembly done in steps **2** and **23** for the correct assembly of the sliders.

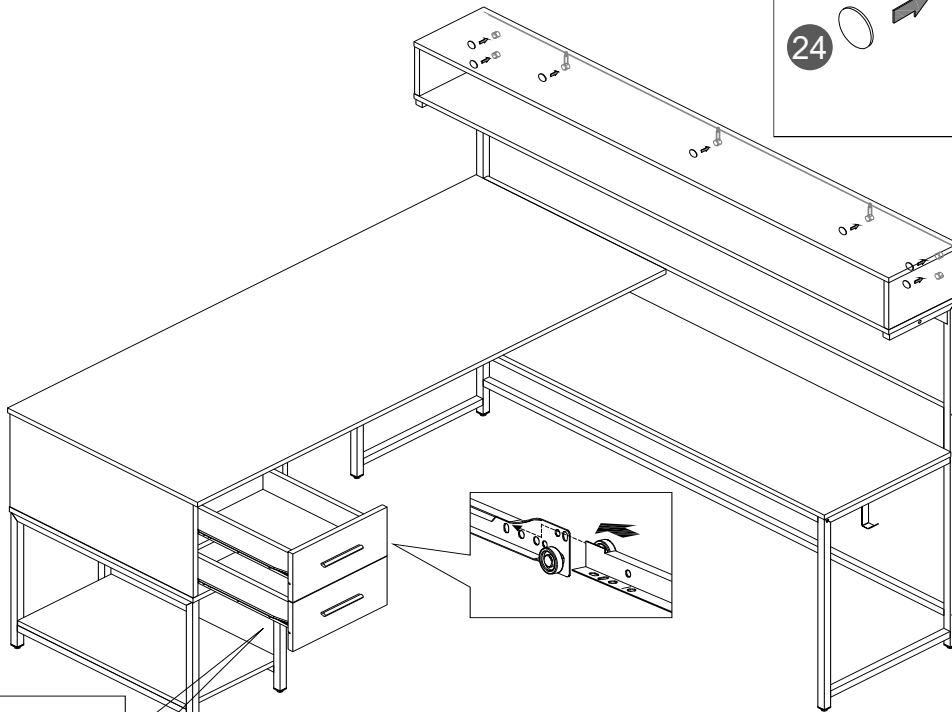


ALL DONE!

Give yourself a nice pat on the back. You did a great job!

CARE, MAINTENANCE AND SAFETY WARNINGS:

WEIGHT LIMITS

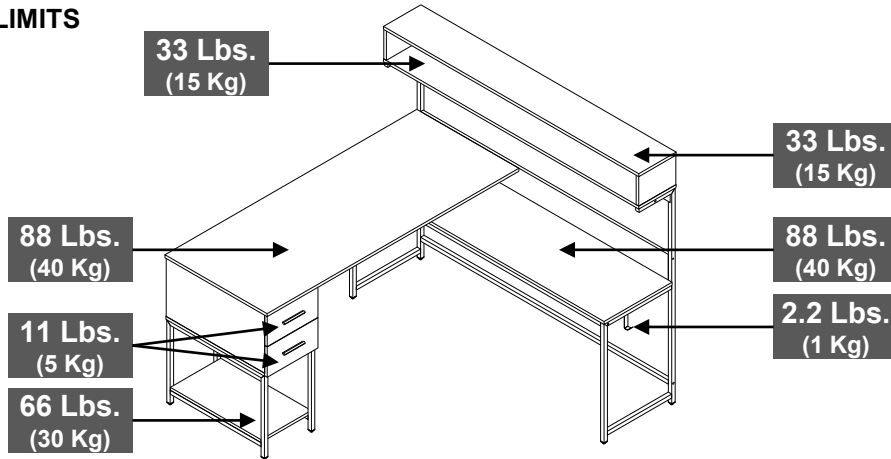

- Do not exceed the indicated weight limits.
- Do not expose the surfaces to direct sunlight or to extreme environmental conditions.
- Clean the surfaces preferable with a clean cloth damped in a solution of mild soap and water, then dry with a clean towel.
- Do not use solvents or abrasive materials to clean the unit.
- If you decide to use a cleaning agent, test first on an area hidden from view such as underneath the tabletop.
- Do not sit on the unit or lean against it.
- Do not allow small children to play under or over the unit.
- Do not allow small children to reach inside the drawers or compartments without your supervision.
- Do not pull, push or drag the unit to move it for more than 1 feet. The unit must be lifted by at least 2 persons when moving in the same or adjacent rooms.
- Before moving the unit, make sure to secure or remove any object that is heavy or might fall off. Please note that lifting from the tabletop with too much weight on the product might lead to part damage/separation.
- When lifting the unit, use both hands and bend your knees, not your backs.
- When transporting the unit to places far away, protect and secure the unit to avoid damage in transit.
- The glass is made of safety tempered glass. The safety feature is that when breakage occurs, the glass shatters into many tiny pieces minimizing the risk of serious injuries. If the glass breaks, do not handle the pieces with your bare hands, take some pictures and contact Customer Service immediately.
- Shall any part of the unit become defective during the warranty period, replacement parts might be available to you at no charge. Please refer to the last pages on this manual.
- The warranty does not extend to regular wear and tear, nor the manufacturer assumes liability for damages or consequences due to accidents, incorrect assembly, negligence, improper use, modifications, or not heeding the above warnings.

TECHNI MOBILI WARRANTY
DESKS/LAPTOP CARTS/FILE CABINETS: LIMITED 5-YEAR WARRANTY
TV Stand/Entertainment Center: 2 YEAR WARRANTY

RTA Products, LLC warrants to the Original Purchaser who acquired a new product from RTA Products or its authorized resellers that this product will be free from defects in its workmanship and materials, under normal use and service conditions, as described herein. "Defects" as used in this warranty, is defined as any imperfections that impair the use of the furniture or product. RTA Products LLC will replace any defective part, at its discretion, and without charge to the original purchaser other than the freight from the end consumer to RTA Products.

Replacement parts can only be supplied if parts are available. Items out of production may be unavailable. This warranty will be effective for the applicable time period beginning the date of purchase on your original sales receipt. RTA product's obligation under this warranty is limited to repairing or replacing products or parts as provided herein. This product has been designed for and is intended for office and home-office use only. This warranty is Original Purchaser's sole remedy for product defects, and this warranty does not extend to any product, or damage to any product, caused by or attributed to abuse or misuse, products used for commercial or rental purposes, use modifications of, or attachments to the product, and products or parts not used, maintained, or extended hereunder is in lieu of any and all other warranties, express or implied, including without limitations any implied warranty or merchantability or of fitness for a particular purpose. Please note, all desks made with PVC Laminate surface should not be exposed to direct sunlight, as it may damage the material. Damage of this nature is not covered under this warranty.

RTA Products will not be responsible for indirect, special, incidental or consequential damages. This warranty is limited to merchandise purchased in the Continental United States. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights that may vary from state to state.

RTA Products will advise you of the procedure to follow in making warranty claims. The following are the procedures for warranty claims:

- a. Call us Monday – Friday, from 9am-5pm (Eastern Time) at (866) 782-5520 to explain the defect and give your name, address and phone number. Please have ready the model number of our product, date and place of purchase. You can also write to us by e-mail to warranty@rtaproducts.com and include the same information.
- b. If we determine that replacement will remedy the situation, and in order to determine the extent or the cause of the defect, purchaser will need to send the part in question at purchaser's expense. Once we receive the part, we will examine it and determine whether the claim is valid (or not), and then proceed to send the replacement. We will ship the replacement at our expense.

FOR SEVERAL HELP OPTIONS INCLUDING REPLACEMENT PARTS ORDERS

VISIT: WWW.TECHNIMOBILI.COM



CLICK ON SUPPORT TAB



Scan QR Code to order replacement parts

OR EMAIL US: SUPPORT@RTAPRODUCTS.COM