## Product Description .-




Frame	6061 aluminum alloy	Battery	36V 13Ah Lithium Battery
Motor	500W Motor	Controller	36V 22A
Charge Time	4-6 hours	Max Speed	40 km/h
Range Distance	25-35 km	Brake	F/R disc brake
Light	With front light	Display	LCD display
Fork	Aluminum Alloy Rigid Fork	Tire	20x4.0
Derailleur	Outer 7 speed SHIMANO	Packing Size	140*28*68cm

# Safety Notice

#### To Ensure Your Safety, Make the Following Functional Checks Before Driving:


- 1. Test brake system, throttle, and power system.
- 2. Tire pressure should be at 30 psi.
- 3. Check front wheel lug-nuts, securely tighten before every ride.
- 4. Battery charge level- found on side of battery.
- 5. Braking system adjustment and free operation.

### 

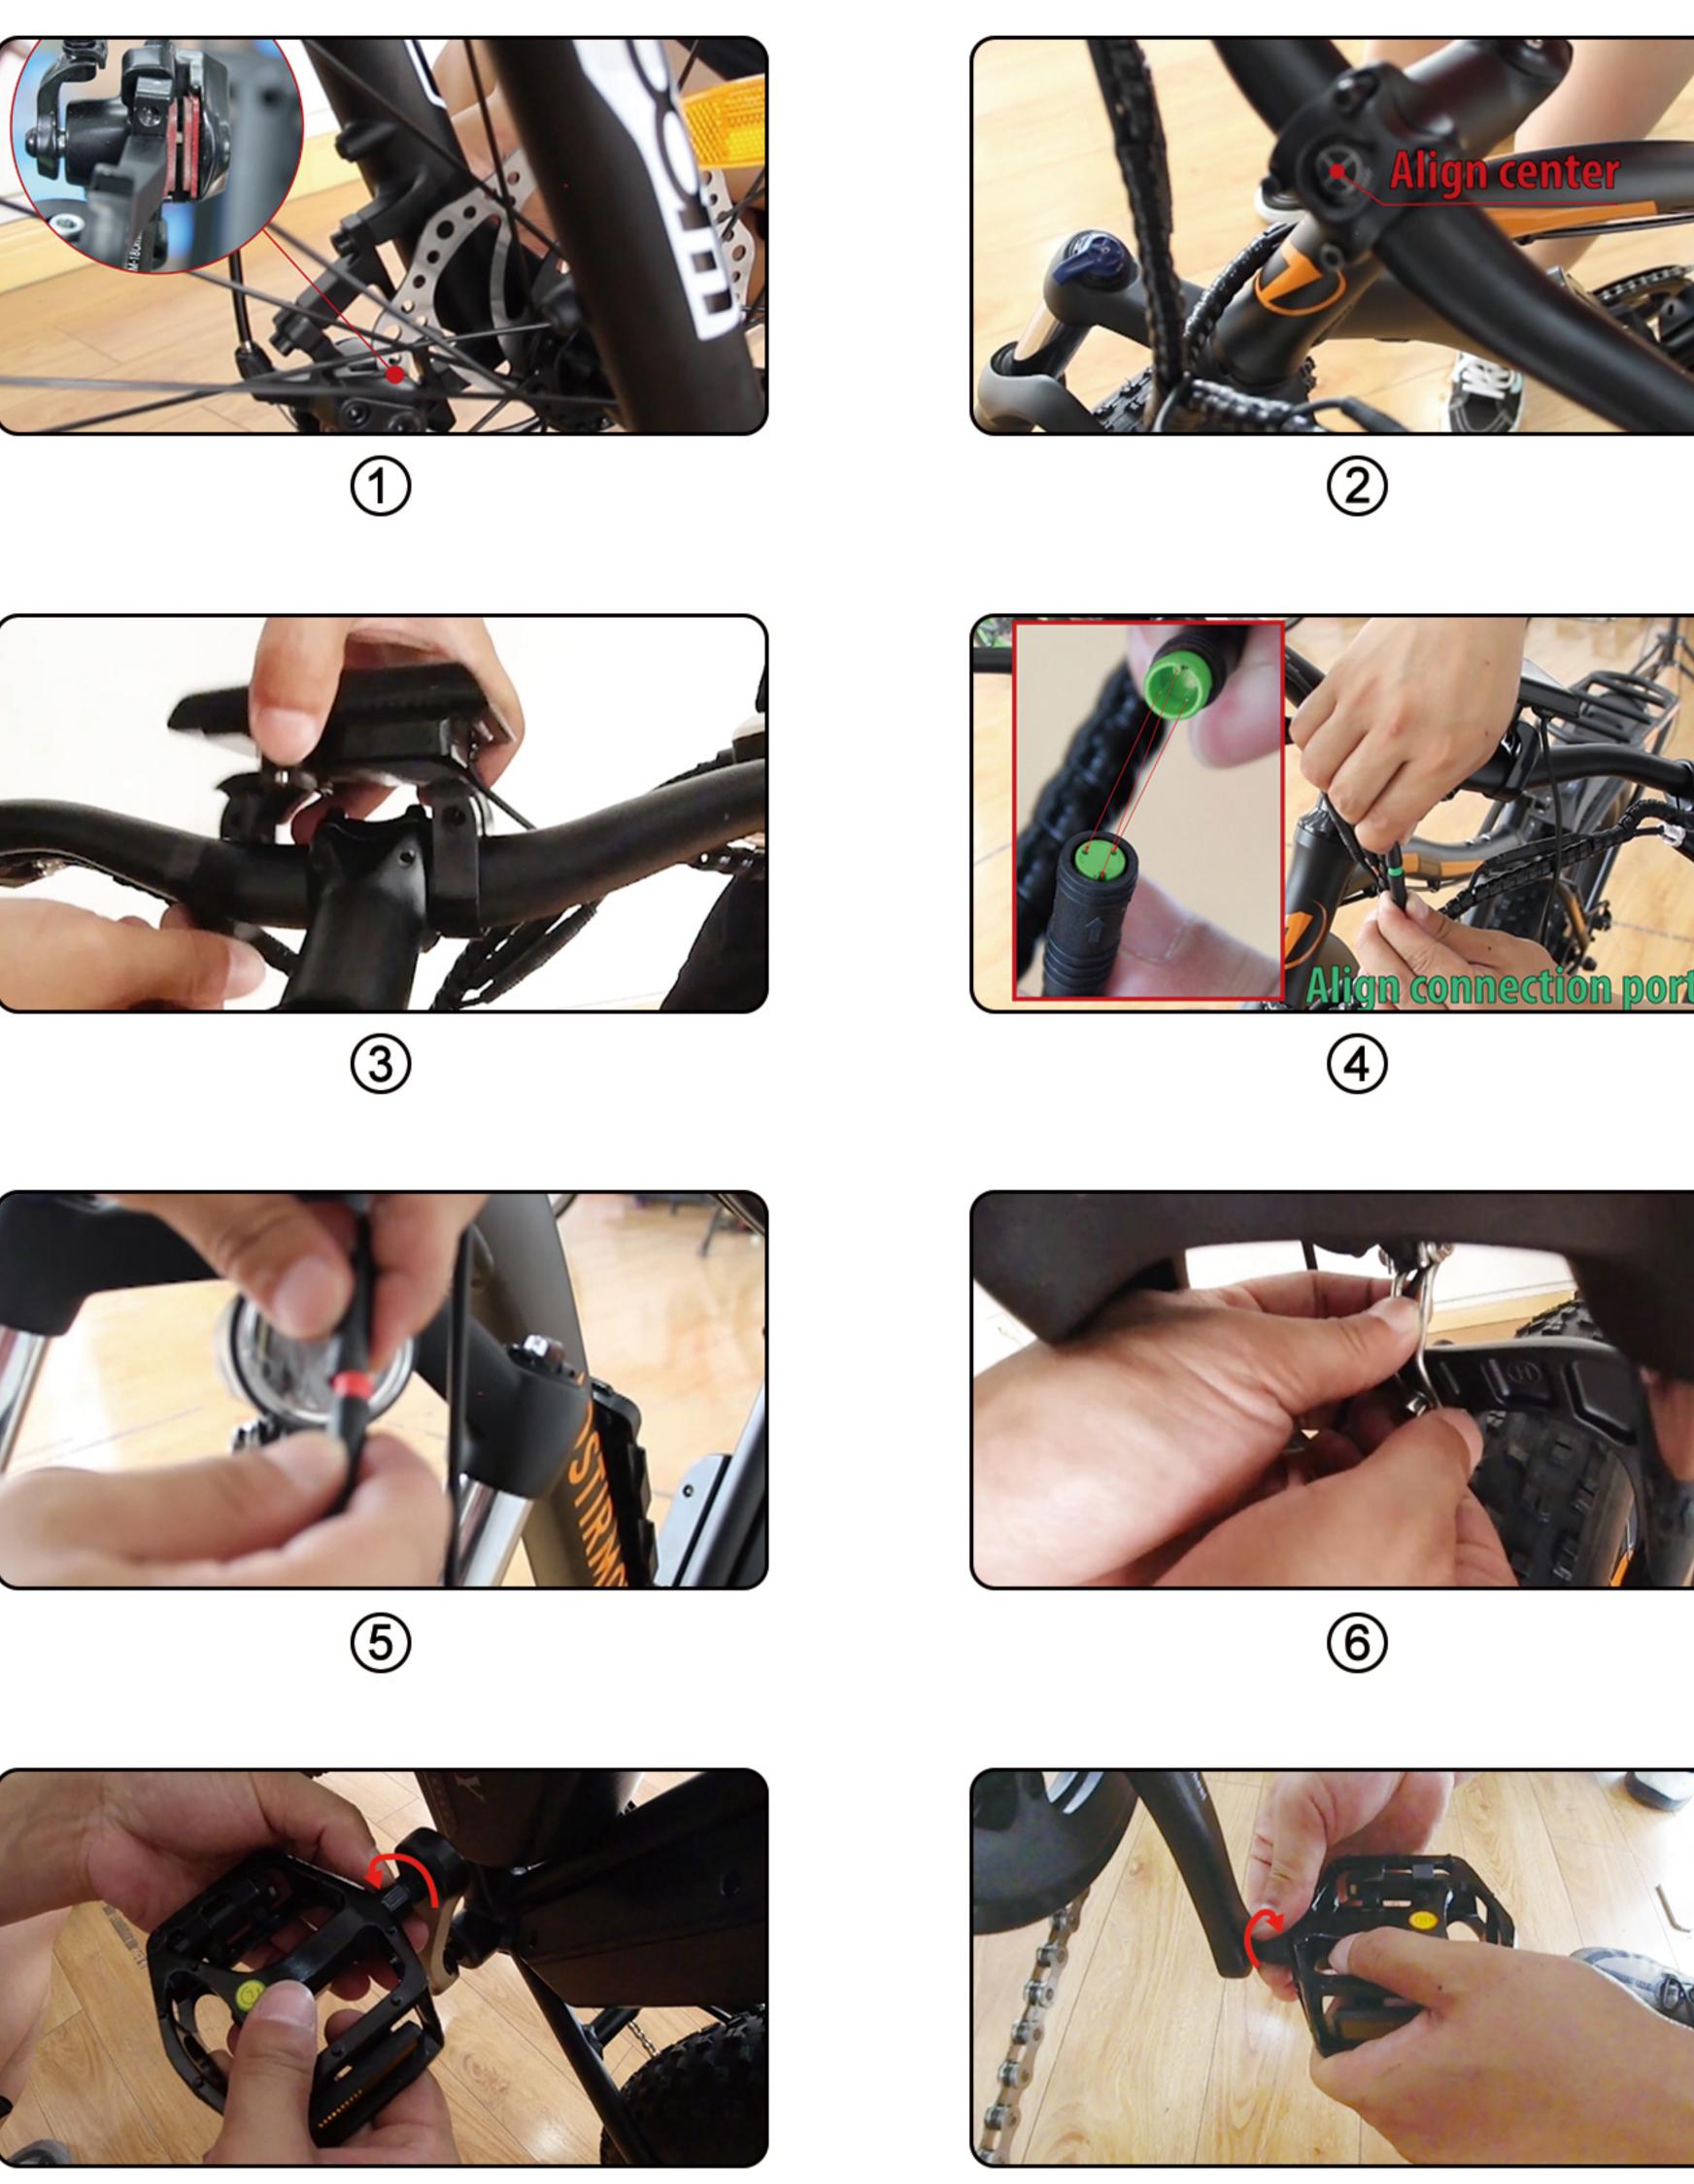

- 1. Open your package.
- 2. Take out the tool box.
- 3. Take out the bicycle from the package and put it on a soft surface to avoid scratches. Cut the tie that secures the front wheel to the side
- 4. Remove the protective foam.
- 5. Open the accessory kit and remove the tool kit
- 6. Invert the bicycle.
- 7. Remove the large fixing bolt on the front fork.
- 8. Put the front wheel on the front fork and place the disc brake pad on the front wheel in the middle of the disc brake caliper( Figure 1).
- 9. Use the supplied 15mm flat tool to tighten the two bolts.
- 10. Tie the key to the handlebar clamp, cut the zipper, and then use the Allen wrench in the tool kit to remove the clamp.
- 11. Place the handlebar in the middle position (Figure 2), install the rod clamp and tighten the screws with the included Allen wrench.
- 12.Install the LCD-display on the handlebar (Figure 3), tighten the screws, and connect the green connecting wire (Figure 4)
- 13. Grasp the bicycle light and unscrew the lens. Then, remove the plastic insulator, re-tighten the lens, and then connect the red cable (Figure 5), and connect the bicycle light to the screw above the front fork (Figure 6).
- 14. Install the pedal. The right pedal rotates clockwise (Figure 7), and the left pedal rotates counterclockwise (Figure 8). NOTE: Pedal mark "L" means left and "R" means right.
- 15. Vertical bicycle
- 16.Push the seat into the column, fix it in the desired position, tighten the screws, and then fix it.
- 17.Installation is complete.When connecting meters, headlights, brake circuit breakers, handlebars, etc., please align them and do not install violently(Figure 4).

### • Folding Steps •

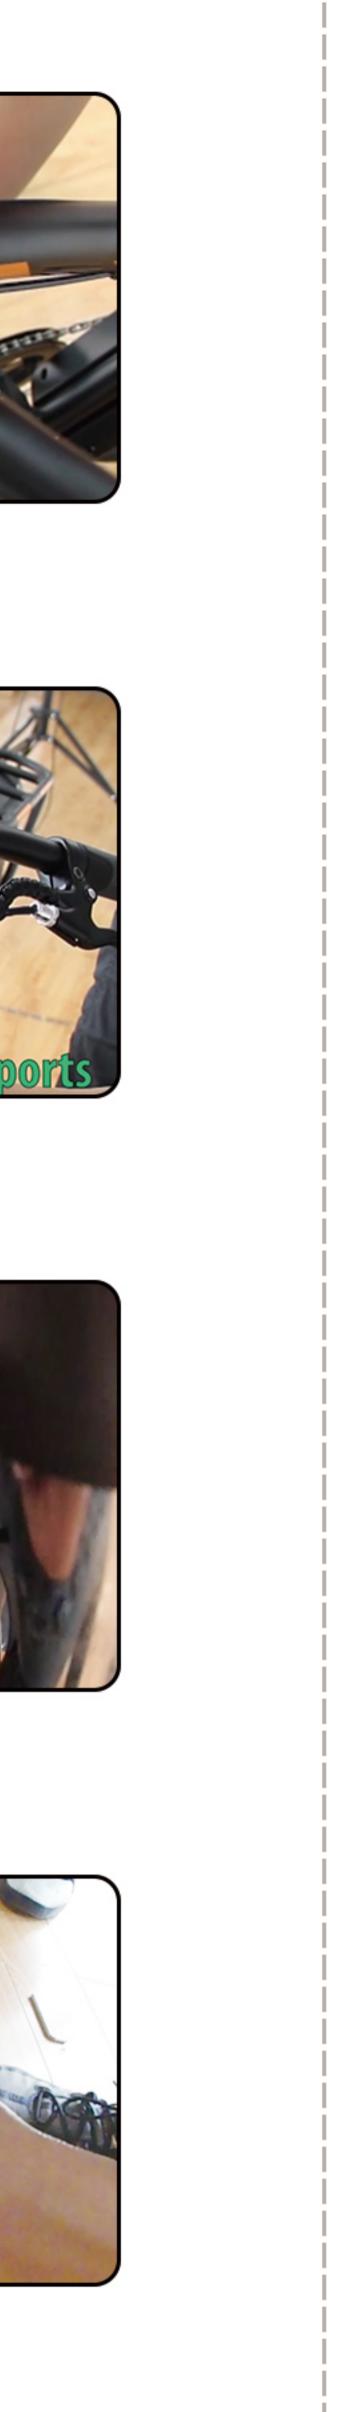




1. Fold the pedal, hold both sides of the pedal with both hands, shrink and fold inward



2. Fold the front and lift up the front handle

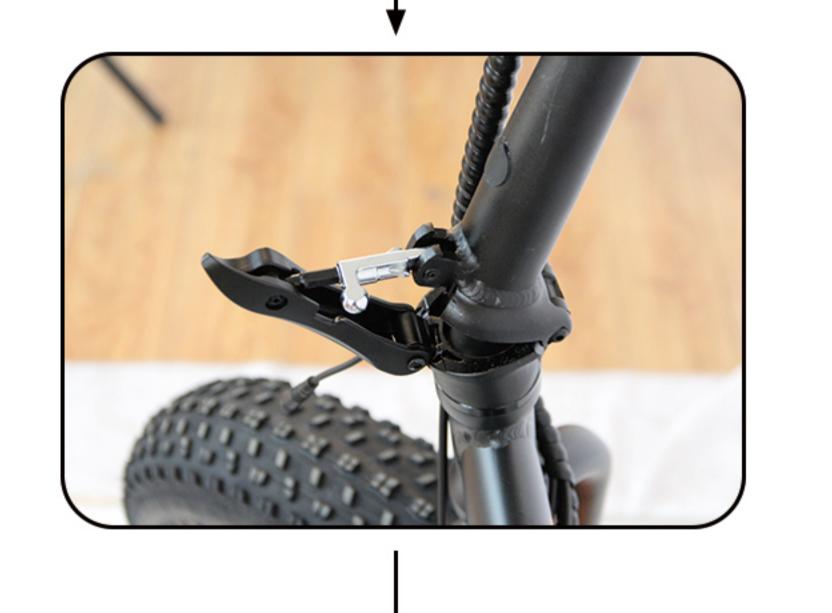


3. Push the lock switch outwards, hold the handle and fold inward immediately



4. Fold the body, push the lock switch upwards, and then turn the switch clockwise



5. Hold both sides of the body and fold inward

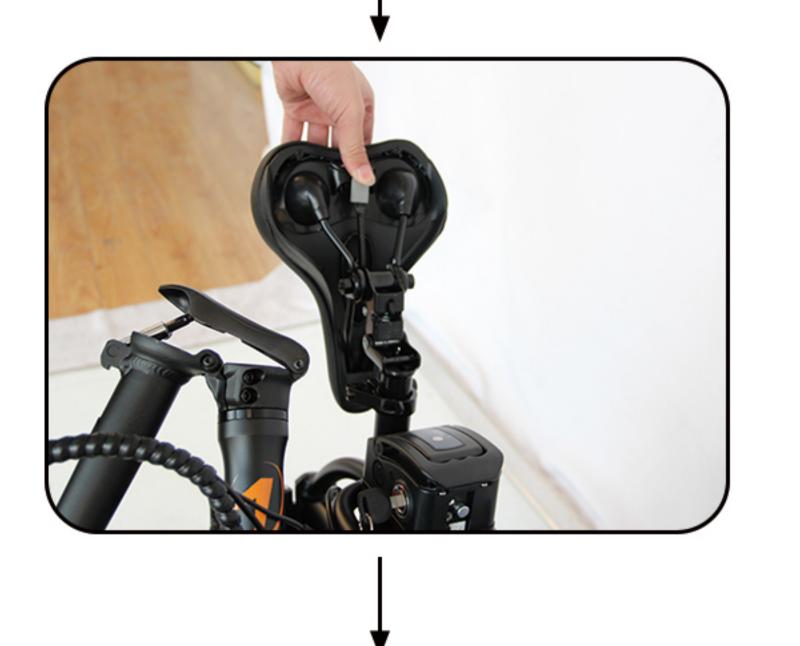

6. Fold the seat cushion, lift the switch under the seat cushion and grab the seat cushion, lift up to fold the seat cushion, turn the battery key counterclockwise to unlock the battery, and take out the battery



7. After folding, you can easily put A20 in your car trunk or put it at home, which will save your space even more