










# INSTRUCTION MANUAL



RETAIN FOR FUTURE REFERENCE

- 1. The pet trailer can be used with most bicycles.**
- 2. The trailer is designed for pets, and not intended for children.**
- 3. You should follow the applicable national legal requirements during use, e.g. lighting and reflectors.**
- 4. Regularly check all important components such as: drawbar, connecting device, frame, tyres and wheels etc. for safe condition; regular verification whether bolted assemblies are well tightened.**
- 5. Be careful when you ride, especially when going up and down hills and turning corners, braking should be used, and enough space should be kept.**
- 6. Pay attention that the trailer may influence the bicycle's braking distance.**
- 7. Cycle trailers pulled by an EPAC can be restricted by law.**

# PARTS LIST

<b>A</b>  1pc	<b>B</b>  1pc	<b>C</b>  1pc
<b>D</b>  1pc	<b>E</b>  1pc	<b>F</b>  1pc
<b>G</b>  M6x40 4pcs	<b>H</b>  2pcs	<b>I</b>  1pc

## ASSEMBLY

**1**



- 1. Unfold the folded cloth frame of the trailer**
- 2. Install the Crossbar into the upper rear side of the Cabin Frame**
- 3. Fix the 2 ends of the support bar with the Screw**



**Warning!**

Tight all the screws to 60% first then tight to 100%.

**2**

**1. Fix the 2 sides of the push handle to the mounting hole sat the rear of the Cabin Frame.**



**3**

**1. Press up on the spring buckle on the below Crossbar of the Cabin Frame.**

**Notice!!!**

**\*Must need to adjust the spring buckle on the crossbar to the correct direction before pressing it up. Otherwise the wheels will not be locked normally.**

**\* The correct direction of the spring buck please refer to the circled part of the picture.**

**2. Insert the wheel with axle into the mounting hole on the below crossbar 2 side of the Cabin Frame. Finally release the spring buckle to fix the wheel. Install the 2 wheels into the 2 sides of the frame in the same way.**

**Notice!!!!**

**\*After releasing the spring buckle, pay attention to check whether the wheel is fixed by the spring buckle to avoid accidental loosening of the wheel during driving.**





**Warning!**

Tight all the screws to 60% first then tight to 100%.

**4**




**1. Insert the rod of Y-shaped bracket with Front wheel underside plastic cover into the front mounting hole of fixed on the Cabin frame.**



**2. Install the Front wheel upper-side plastic cover and the screw into the front mounting hole, tighten the screw to fix the plastic cover and the front wheel.**

**5**

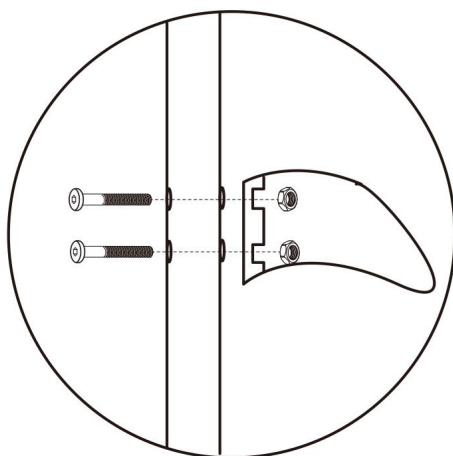



**Warning!**

Tight all the screws to 60% first then tight to 100%.

**6**

**1. Insert the flag into the pocket.**



**7**

## **2-in-1 Bike Trailer Effect Display**



### **1. Pet Stroller**

**Fix the connect rod to the bottom of the Cabin.**

### **2. Pet Trailer**

**Attach the connect rod to bike with universal hitch.**



**Warning!**

Tight all the screws to 60% first then tight to 100%.

**8**

## INSTALLATION TIPS



**1.The head connector part of the long bent rod with the buckles trap is designed with a fixed pin for easy connection to the bicycle.**



**2.You can fix attach the head connector part to the rear end of the bike, with a pin for quick attachment or detachment of the trailer.**