



To deodorize the leather
leave the chair in a shady
outside for 1-2 days.



For longer use

Re-tighten bolts every 6 months by using
the enclosed allen-key.
*Using an electric drill can damage the chair.
Please re-tighten bolts manually.



Safety Information



Sit in the center of the
chair, with your back to
the backrest



Do not sit at the front
edge of the chair



Do not stand on the
chair



Do not use the chair
with more than one
person



Do not push the chair
around when a person
is sitting in it



Do not push down on
the backrest when a
person is reclined



Do not place all your
weight on only the
backrest

INSTRUCTION MANUAL

Model: C-6109

✉ HJ-Customer-Service@outlook.com

☎ (909)637-7665 | (909)637-7593

INSTRUCTION MANUAL

C-6109




<https://hinstallationvideos.s3.amazonaws.com/6109+Office+chair.mp4>

✉ HJ-Customer-Service@outlook.com

☎ (909)637-7665 | (909)637-7593


EST 9:00AM--17:00PM

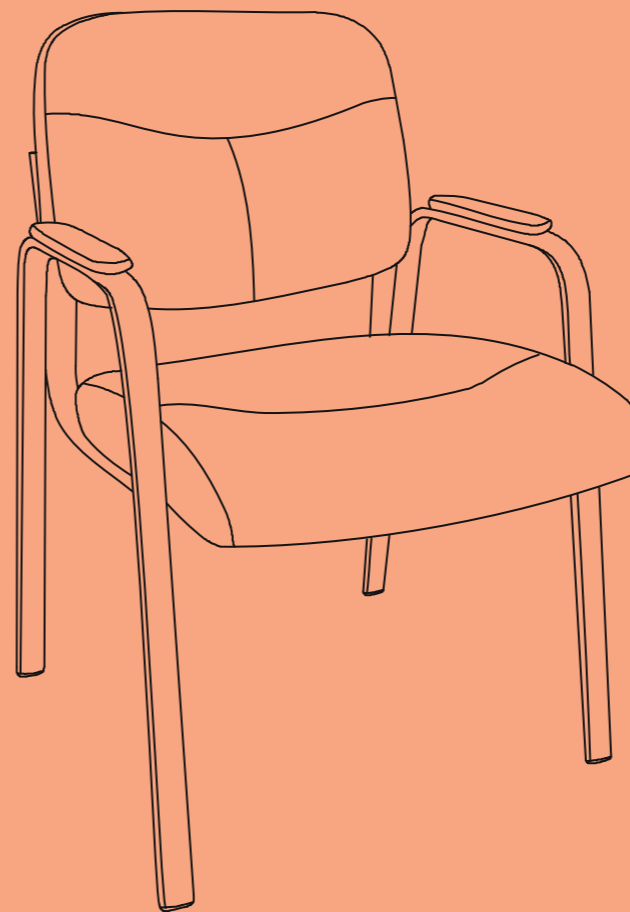


Package List



(A)*1 (L) Armrest




(B)*1 (R) Armrest



(C)*1 Backrest



(D)*1 Seat Cushion



M6x35mm

(E)*8 Bolts




(F)*8 Washer



(G)*1 Wrench

Assembly Instruction

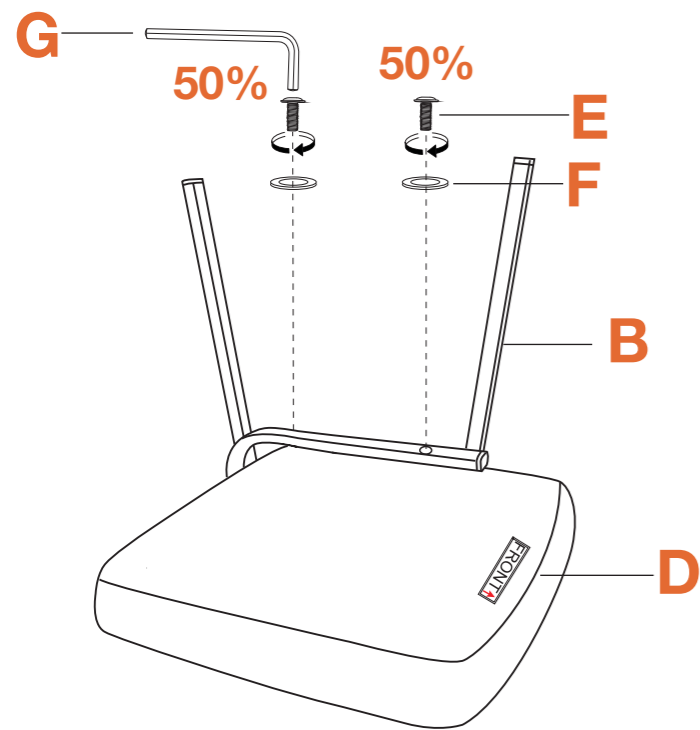

Step 1:


Put Bolts (E)*2 into the Washer (F)*2. Install Armrest (B)*1(R) to the right side of the Seat Cushion (D) with Bolts (E)*2.

Note: Bolts are only tightened 50%

Step 2:

Install Armrest (A)*1(L) to the left side of the Seat Cushion (D) as in previous step.



Note: Bolts are only tightened 50%.

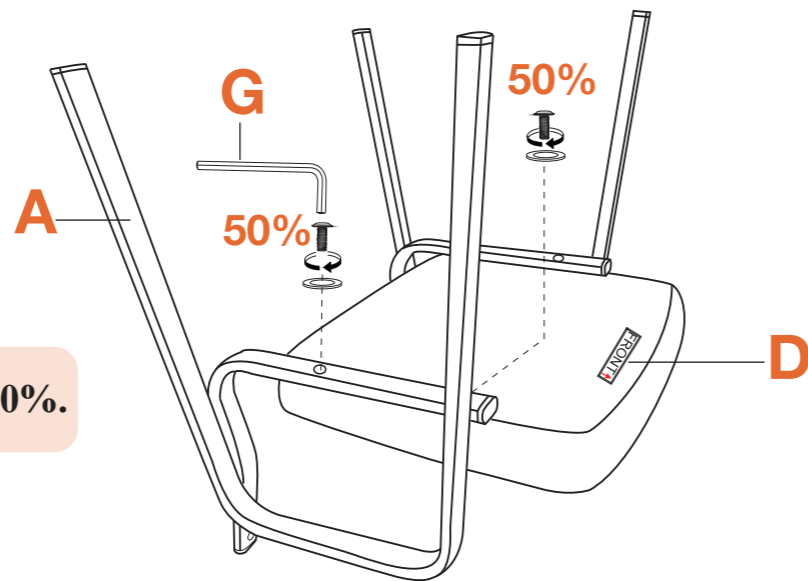

Step 3:

Put Bolts (E)*4 into the Washer (F)*4. Attach Backrest (C) to the Armrests (A&B) with Bolts (E)*4.

Note: 100% tighten the Bolts.

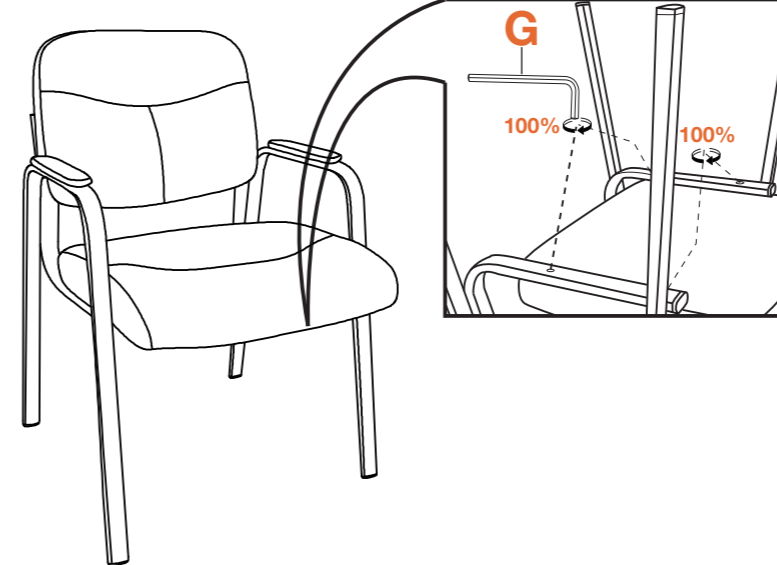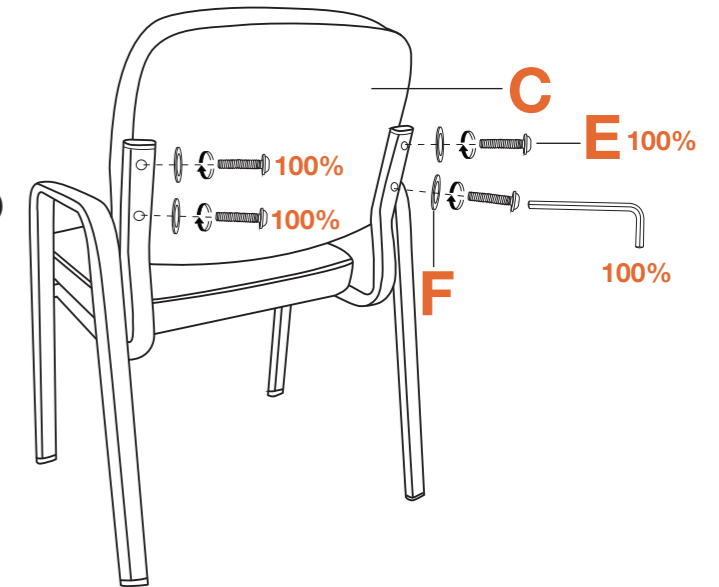

Step 4:

100% tighten the Bolts (E)*4 on both sides of the Seat Cushion (D).

CAUTION:

- * Before using the chair, check to ensure that all bolts are fully tightened.
- * Lubricate all parts and tighten all bolts every 6 months or whenever needed.