




















Parts & Hardware Included:

Picture	Description	Qty	Check list
	Terminal cap	3	A
	Mounting bracket	1	B
	M6 * 45 screw Equipped with M6 hexagon nut	2	C
	M4 * 20 self tapping screw	4	D
	φ 150 * 40 lamp panel	1	E
	Copper tension head	4	F
	M6 flowering nut	2	G
	Heading wire rope	4	H
	φ 600 lamp holder	1	I
	10 crystal beads	72	J
	13 crystal beads	50	K
	Hex nut and gasket	14	L
	elbow	8	M
	E27 Lamp cup	8	N
	E26 lamp cap	8	O
	Lock wire iron piece	1	P
	Mainline of power supply	1	Q
	Lock wire iron piece	2	R



Brand name Product model: F8053

Explosion diagram of lamp structure

HOUSE WIRES



OFF
FIXTURE WIRES

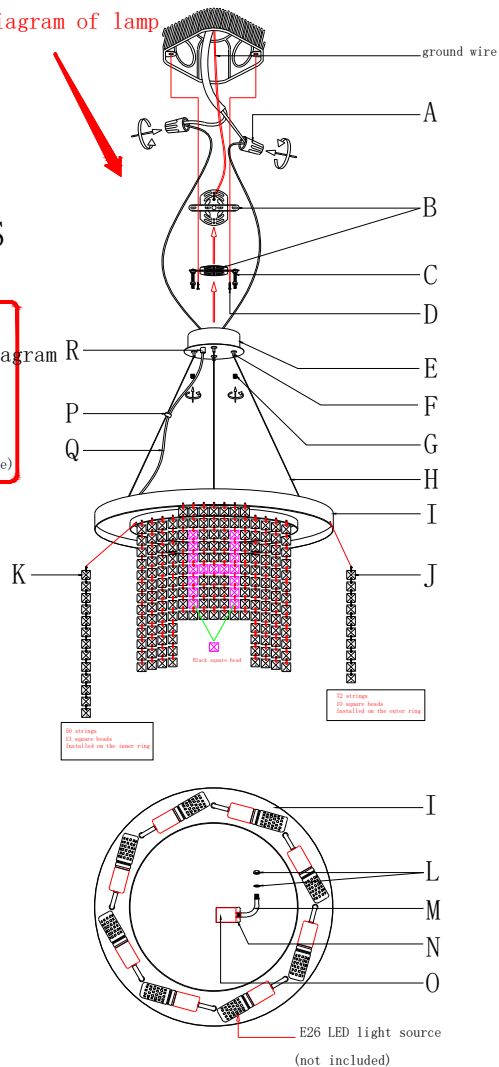

Installation steps

Installation steps are only for indoor installation

- Carefully disassemble and determine each component to ensure that everything you are ready to install is placed on a clean surface, such as a table or floor.
- Cut off the main power supply of the fuse box or circuit breaker in the house or building.
- Screw out M4 screws and remove the mounting bracket.
- Use 8/32 screws to fasten the mounting bracket to the socket box.
- Use a cross screwdriver (not provided) to screw out the M4 screw on the bracket.
- Connect the wire from the clamp to the power wire from the outlet box and cover. Screw the neutral wire of the lamp and the neutral wire on the outlet box together, and screw the live wire of the lamp and the live wire on the socket box together with the wire cap. Remove the grounding wire from the clamp and socket box, and put them under the head of the green screw on the mounting bracket.
- Carefully plug all wires into the socket box.
- Insert the lamp panel into the bracket fixed on the wire box, make the head of M4 screw pass through the hole of the lamp panel, fix the lamp by tightening, and then adjust the balance of the whole lamp body.
- Open the crystal bag. Install the crystal string on the metal lamp holder according to the figure. Install the E26 bulb (not included).
- Turn on the power supply to test the light. Save these instructions for future use. If the light does not work, you can contact our customer service team to solve the problem

Maintenance method

Clean the water wave with a soft dry cloth or an electrostatic duster. Avoid the use of harsh chemicals and abrasives to clean the fixture and smooth the surface treatment.

Safety precautions

Your lamp is in the water, which will damage the circuit.

After sales problems can be contacted on the platform order page

We hope you like your new lighting as much. If your project meets or exceeds your expectations, we will be honored. If you write a comment to us, sharing your experience can help others and other customers understand your ideas. We really appreciate your support in making money.

After installation, the finger mold and sweat stains left on the metal and crystal surface of the lamp body can be cleaned with a soft dry cloth or an electrostatic duster.