










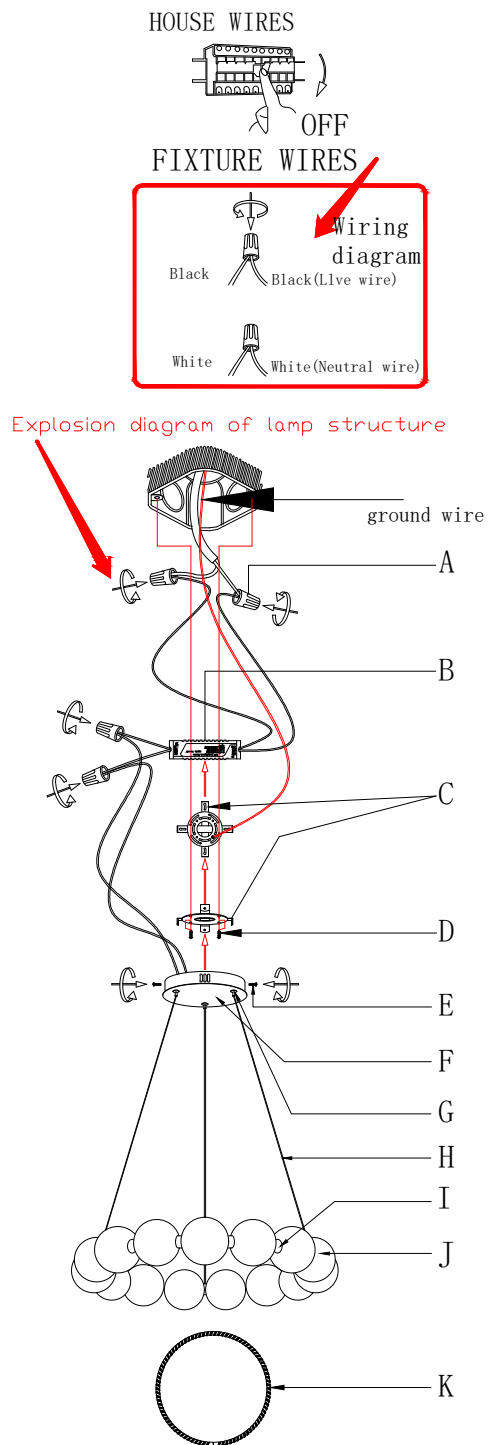


ITEM NO:F8008/1  
Parts &. Hardware  
Included:

| Picture   | Description                                     | Qty | Check list |
|---|---|-----|------------|
|    | wiring cap                                      | 4   | A          |
|    | drive   | 1   | B          |
|    | Ø 125 installation bracket                      | 1   | C          |
|    | M4 * 20 self tapping screw                      | 2   | D          |
|    | M4 * 15 flat angle screw                        | 4   | E          |
|    | Ø 190 * 35 light panel                          | 1   | F          |
|    | Tension head copper parts                       | 3   | G          |
|    | wire  | 3   | H          |
|  | aluminum parts                                  | 15  | I          |
|  | Ø 100 rolling plastic ball                      | 15  | J          |
|  | Pipe ring with LED Soft light with light source | 1   | K          |



**Installation steps**  
Installation steps are limited to indoor installation only

- Carefully disassemble and determine each component to ensure that you are ready to install everything. Place each component on a clean surface, such as a table or floor.
- Cut off the main power supply to the fuse box or circuit breaker inside the house or building.
- Screw out M4 screws and remove the mounting bracket.
- Use 8/32 screws to fasten the mounting bracket to the socket box.
- Use a Phillips screwdriver (not provided) to unscrew the M4 screw on the bracket. 6. Connect the wire from the fixture to the power cord from the outlet box and cover using a wire clamp. Twist the neutral wire on the lamp driver and the neutral wire on the outlet box together, and cover it with a wire cap. Twist the live wire on the lamp driver and the live wire on the socket box together, and cover it with a wire cap. Remove the grounding wires from the fixture and socket box and place them under the head of the green screw on the mounting bracket.
- Carefully plug all wires into the socket box.
- Insert the lamp panel into the bracket fixed on the wire box, make the head of M4 screw pass through the hole of the lamp panel, fix the lamp by tightening, and then adjust the balance of the whole lamp body.
- Open the crystal bag and follow the instructions in the picture to install the crystal string on the metal lamp holder.
- Turn on the power to test the pendant lamp. Save these instructions for future use. If the light does not work, you can contact our customer service team to solve the problem

**Maintenance method**

Clean water waves with a soft dry cloth or electrostatic duster. Avoid using irritating chemicals and abrasives to clean fixtures and smooth surface treatment.

**Safety precautions for use**

Your lamp is in the water, which will damage the wiring.

After sales issues can be contacted on the platform's order page

We hope you enjoy your new lighting as much as possible. If your project meets or exceeds your expectations, we would be honored. If you could write a comment and share your experience, it can help others and other clients understand your ideas. We really appreciate your support in making money for us.

After installation, the finger molds and sweat marks left on the metal and crystal surfaces of the lamp body can be gently wiped clean with a soft dry cloth or electrostatic duster.