

Parts List					
Label	Picture	Description	QTY		
A	•	Left Front Leg	1		
В		Right Front Leg	1		
С		Left Back Leg	1		


D		Right Back Leg	1
E		Bottom Panel	1
F		Top Panel	1
G		Cross Bars	2
н		Handle	1
I	\odot	Wheels	2
J		Bottle Holder	1

Noble House Home Furnishings LLC


<u>Hardware</u>					
Label	Picture	Description	QTY		
1		Bolt (M8*70mm)	3		
2		Bolt (M6*30mm)	23		
3		Nut (M8)	3		
4	\bigcirc	Flat Washer (M8.5/20x2mm)	3		
5	\bigcirc	Flat Washer (M8.5/30x2mm)	3		
6	\bigcirc	Flat Washer (M8.5/30x5mm)	3		
7		Iron Tube (M10/8.2x0.9mm)	3		
8		Wrench	1		
9		Allen Wrench	1		


Assembly Preparation


- Read instructions, cover to cover-
 - · Have 2 adults on hand for assembly-
 - Do not assemble on flooring or carpet-
 - Assemble on a clean non-marring surface (packing foam)-
 - Save all packaging until finished-

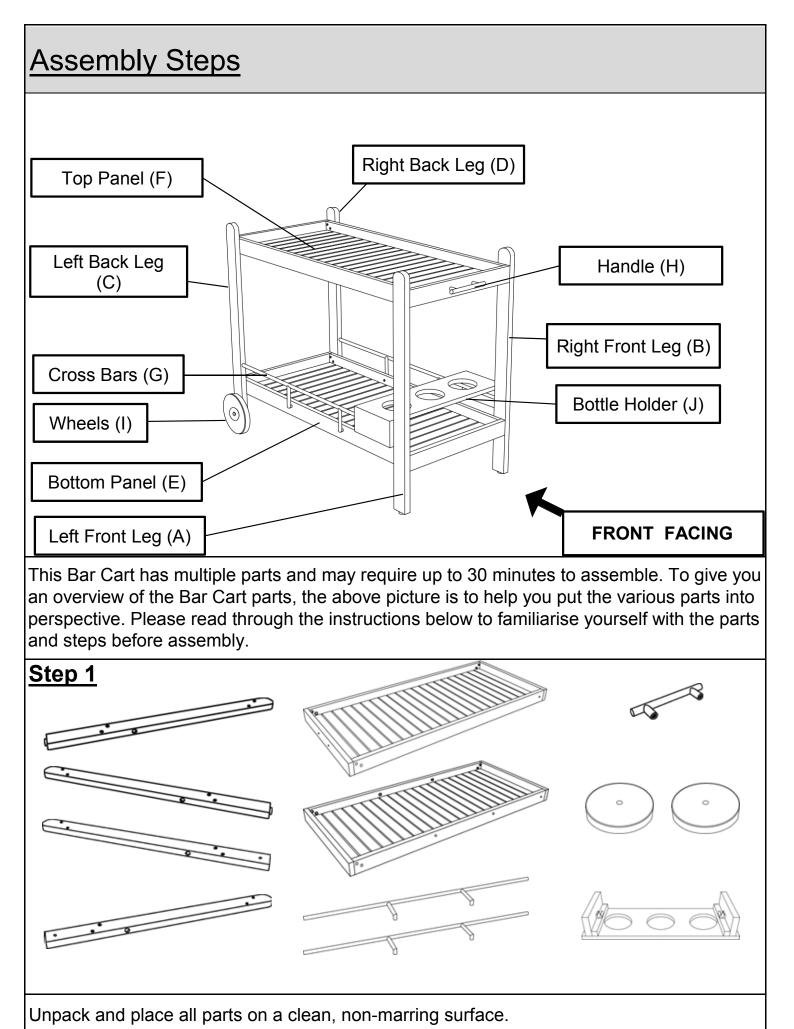

Noble House Home Furnishings LLC

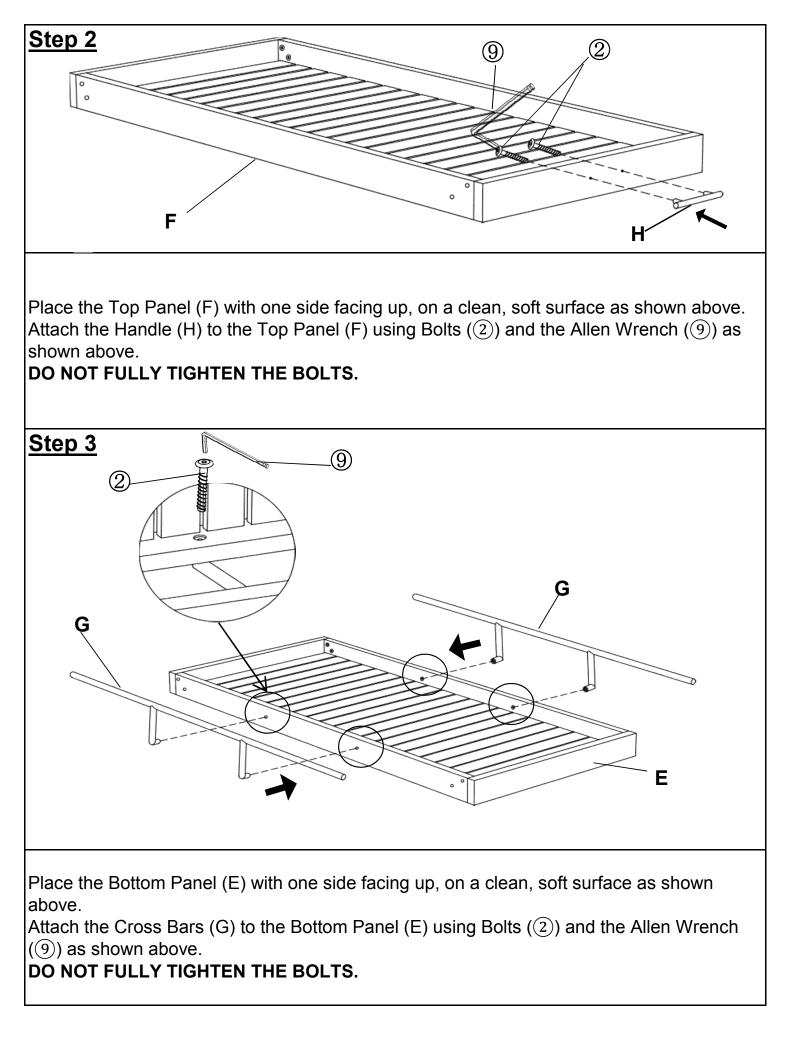

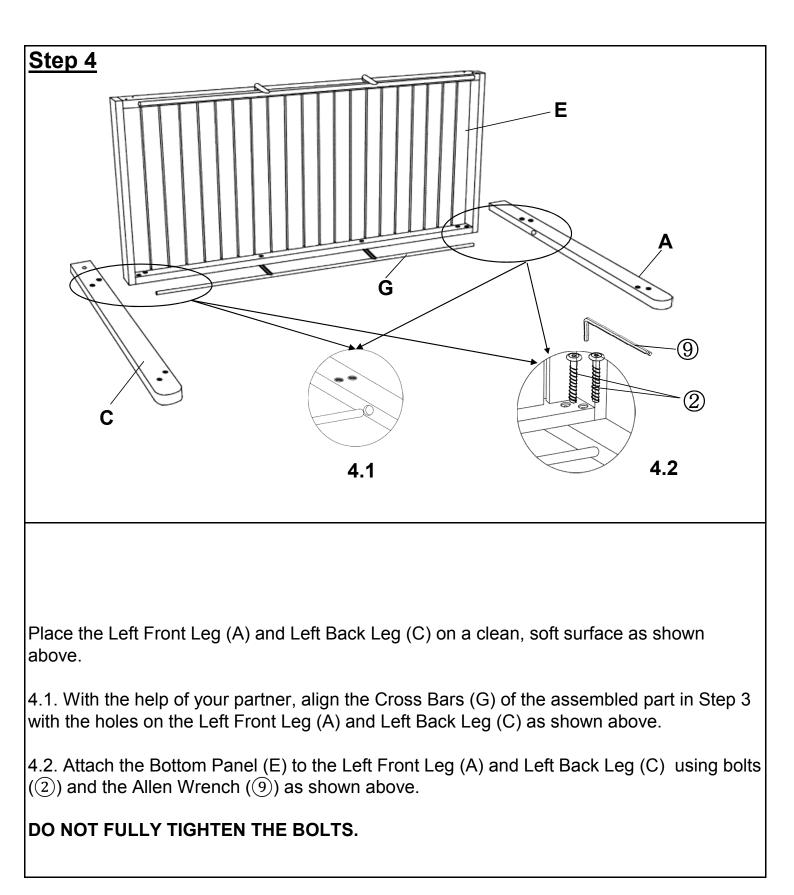


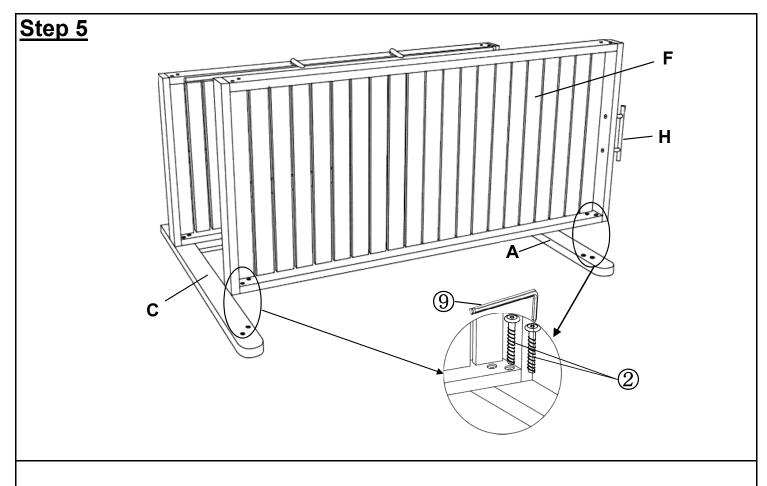


With the help of your partner, align the Top Panel (F) with the holes on the Left Front Leg (A) and Left Back Leg (C) of the assembled part in Step 4, then attach using Bolts ((2)) and the Allen Wrench ((9)) as shown above.

NOTE: The Handle (H) should be on the same side as the Left Front Leg (A)

DO NOT FULLY TIGHTEN THE BOLTS.

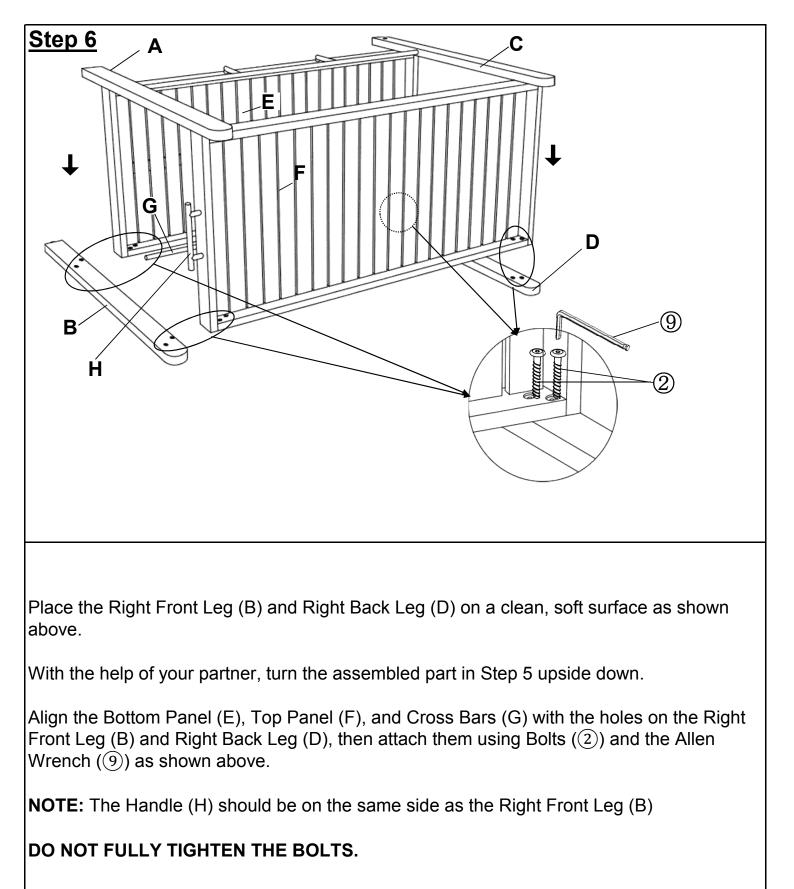


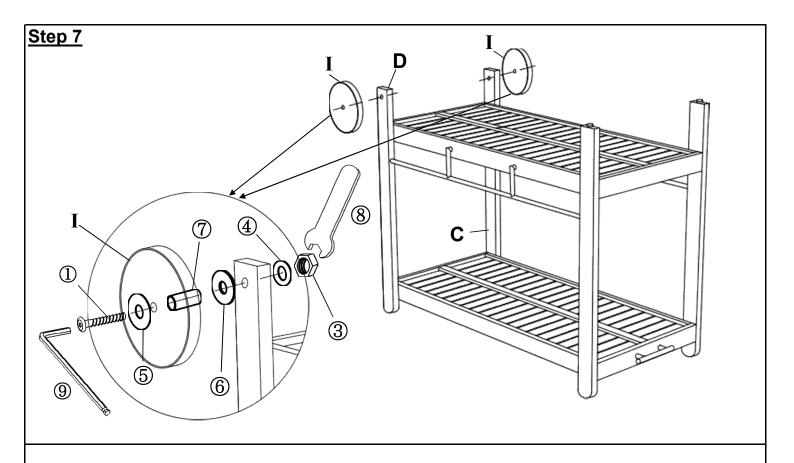

With the help from your partner, turn the assembled part in Step 6 face down onto the ground as shown above.

Attach the Wheels (I) to this assembled part by using the following sequence of hardware, from the outside to the inside of the Right Back Leg (D): Bolt (1), Flat Washer (5), Iron Tube (7), Wheels (I),and Flat Washer (6). On the inside of the Right Back Leg (D): Flat Washer (4), Nut (3) and Wrench (8). Use the Allen Wrench (9) to tighten the bolt as shown above.

Repeat the same process above to attach the remaining Wheel (I) to the Left Back Leg (C). **DO NOT FULLY TIGHTEN THE BOLTS.**

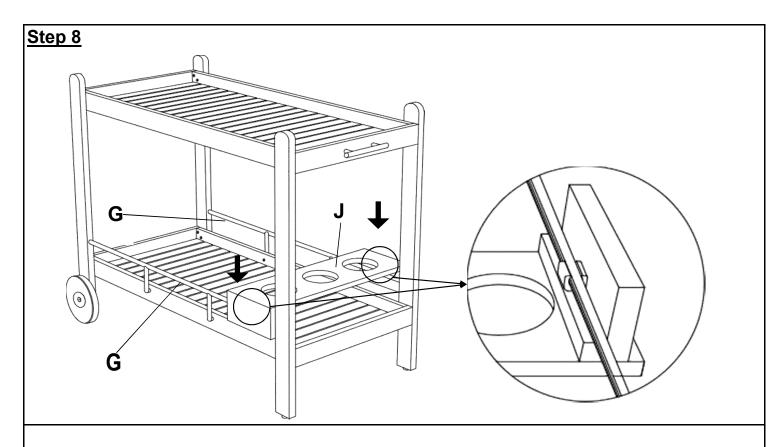

With the help from your partner, turn the assembled part in Step 7 right side up as shown above.

Insert the Bottle Holder (J) onto the Cross Bars (G) of the assembled part in Step 7 by pressing it downwards as shown above.

Place the Bar Cart on a LEVEL SURFACE.

Inspect it and make sure all parts are adequately connected.

EXERT pressure, downwards onto the Bar Cart with both hands. Check for wobbles. This will help align all the parts at all the joint areas.

In a sequential manner, gradually tighten all Bolts at all joints until evenly secured.

Inspect the Bar Cart and make sure all parts are adequately connected. Whenever moving or lifting the Bar Cart, be sure to get support from your adult partner(s).

When tightening any Bolt, tighten it sequentially.

DO NOT fully tighten any Bolt fully and then move on to the next one. This could cause the frame to wrap.

If there are any wobbles after tightening, loosen the Bolts and execute the same process.

WARNING!! IF Bar Cart IS NOT STABLE, IT COULD LEAD TO DAMAGE OF THE PRODUCT.

Ensure all Bolts are fully locked into position.

Your Bar Cart is ready to be used.

This Bar Cart can only be used on a flat, level surface.

