



CE EMC REPORT

| | |
|--------------------|---|
| Prepared For: | Jinhua Youzhi Sports Equipment Co., Ltd No. 466, Donggang North Street, shoetang office, Jindong District, Jinhua City, Zhejiang Province (3rd floor, Building 6, Zhejiang Dongzheng Craft Products Co., Ltd.) |
| Manufacture: | Jinhua Youzhi Sports Equipment Co., Ltd No. 466, Donggang North Street, shoetang office, Jindong District, Jinhua City, Zhejiang Province (3rd floor, Building 6, Zhejiang Dongzheng Craft Products Co., Ltd.) |
| Product Name: | Treadmill |
| Trade Mark: | N/A |
| Main Test Model: | YZ-Z1 |
| Additional Models: | YZ-Z2, YZ-Z6, YZ-Z8, C1, OT-1, BT-1, U6, A1, BT-2, TS-8 |
| Prepared By: | Dongguan True Safety Testing Co., Ltd. Room 201, No.20, East of Houjie Avenue, Houjie, Dongguan, Guangdong, China |
| Test Date: | Dec. 09, 2022 To Dec. 15, 2022 |
| Date of Report: | Dec. 15, 2022 |
| Report No.: | TST20221240038-2ER |



TABLE OF CONTENTS

| | |
|--|-----------|
| TEST REPORT DECLARATION | 5 |
| 1. TEST RESULTS SUMMARY | 6 |
| 2. GENERAL INFORMATION | 7 |
| 2.1. Report information | 7 |
| 2.2. Measurement Uncertainty | 7 |
| 3. PRODUCT DESCRIPTION | 8 |
| 3.1. EUT Description | 8 |
| 3.2. Block Diagram of EUT Configuration | 8 |
| 3.3. Operating Condition of EUT | 8 |
| 3.4. Test Conditions | 8 |
| 3.5. Modifications | 8 |
| 3.6. Abbreviations | 9 |
| 3.7. Performance Criterion | 9 |
| 4. TEST EQUIPMENT USED | 10 |
| 4.1. For Conducted Emission Test | 10 |
| 4.2. For Disturbance Power Test | 10 |
| 4.3. For Harmonic / Flicker Test | 10 |
| 4.4. For Electrostatic Discharge Immunity Test | 10 |
| 4.5. For RF Strength Susceptibility Test | 10 |
| 4.6. For Electrical Fast Transient/Burst Immunity Test | 10 |
| 4.7. For Surge Test | 10 |
| 4.8. For Injected Currents Susceptibility Test | 11 |
| 4.9. For Magnetic Field Immunity Test | 11 |
| 4.10. For Voltage Dips and Interruptions Test | 11 |
| 5. POWER LINE CONDUCTED EMISSION TEST | 12 |
| 5.1. Block Diagram of Test Setup | 12 |
| 5.2. Test Standard | 12 |
| 5.3. Power Line Conducted Emission Limit | 12 |
| 5.4. EUT Configuration on Test | 12 |
| 5.5. Operating Condition of EUT | 13 |
| 5.6. Test Procedure | 13 |
| 5.7. Test Result | 13 |
| 6. DISTURBANCE POWER TEST | 14 |
| 6.1. Block Diagram of Test Setup | 14 |
| 6.2. Disturbance Power Limit | 14 |
| 6.3. EUT Configuration on Test | 14 |
| 6.4. Operating Condition of EUT | 14 |
| 6.5. Test Procedure | 15 |
| 6.6. Disturbance Power Test Result | 15 |
| 7. HARMONIC CURRENT EMISSION TEST | 16 |
| 7.1. Block Diagram of Test Setup | 16 |
| 7.2. Test Standard and Limit | 16 |
| 7.3. Test Procedure | 17 |
| 7.4. Test Results | 17 |
| 8. VOLTAGE FLUCTUATIONS & FLICKER TEST | 18 |
| 8.1. Block Diagram of Test Setup | 18 |



| | |
|--|-----------|
| 8.2. Test Standard | 18 |
| 8.3. Operating Condition of EUT | 18 |
| 8.4. Test Data | 18 |
| 8.5. Test Results | 18 |
| 9. ELECTROSTATIC DISCHARGE TEST | 19 |
| 9.1. Block Diagram of ESD Test Setup | 19 |
| 9.2. Test Standard | 19 |
| 9.3. Severity Levels and Performance Criterion | 20 |
| 9.4. EUT Configuration on Test | 20 |
| 9.5. Operating Condition of EUT | 20 |
| 9.6. Test Procedure | 20 |
| 9.7. Test Results | 21 |
| 10. RF FIELD STRENGTH SUSCEPTIBILITY TEST | 23 |
| 10.1. R/S Test Setup | 23 |
| 10.2. Test Standard | 23 |
| 10.3. Severity Levels and Performance Criterion | 23 |
| 10.4. EUT Configuration on Test | 23 |
| 10.5. Operating Condition of EUT | 24 |
| 10.6. Test Procedure | 24 |
| 10.7. Test Results | 24 |
| 11. ELECTRICAL FAST TRANSIENT/BURST TEST | 26 |
| 11.1. EFT Test Setup | 26 |
| 11.2. Test Standard | 26 |
| 11.3. Severity Levels and Performance Criterion | 26 |
| 11.4. EUT Configuration on Test | 26 |
| 11.5. Operating Condition of EUT | 26 |
| 11.6. Test Procedure | 27 |
| 11.7. Test Results | 27 |
| 12. SURGE TEST | 29 |
| 12.1. Surge Test Setup | 29 |
| 12.2. Test Standard | 29 |
| 12.3. Severity Levels and Performance Criterion | 29 |
| 12.4. EUT Configuration on Test | 29 |
| 12.5. Operating Condition of EUT | 29 |
| 12.6. Test Procedure | 30 |
| 12.7. Test Results | 30 |
| 13. INJECTED CURRENTS SUSCEPTIBILITY TEST | 32 |
| 13.1. Block Diagram of Test AC Mains Setup | 32 |
| 13.2. Test Standard | 32 |
| 13.3. Severity Levels and Performance Criterion | 32 |
| 13.4. EUT Configuration on Test | 32 |
| 13.5. Operating Condition of EUT | 32 |
| 13.6. Test Procedure | 33 |
| 13.7. Test Results | 33 |
| 14. VOLTAGE DIPS AND INTERRUPTIONS TEST | 35 |
| 14.1. Voltage Dips and Interruptions Test Setup | 35 |
| 14.2. Test Standard | 35 |
| 14.3. Severity Levels and Performance Criterion | 35 |
| 14.4. EUT Configuration on Test | 35 |
| 14.5. Operating Condition of EUT | 35 |



| | |
|----------------------------|-----------|
| 14.6. Test Procedure | 36 |
| 14.7. Test Result | 36 |
| APPENDIX I | 38 |
| APPENDIX II | 41 |
| APPENDIX III | 44 |



TEST REPORT DECLARATION

| | | |
|-----------------|---|--|
| Applicant | : | Jinhua Youzhi Sports Equipment Co., Ltd |
| Address | : | No. 466, Donggang North Street, shoetang office, Jindong District, Jinhua City, Zhejiang Province (3rd floor, Building 6, Zhejiang Dongzheng Craft Products Co., Ltd.) |
| EUT Description | : | Treadmill |
| Model Number | : | YZ-Z1 |
| Rating | : | 220-240V~ 50/60Hz 480W |

Test Standards:

EN 55014-1:2017/A11:2020
EN IEC 61000-3-2:2019+A1:2021
EN 61000-3-3:2013+A2:2021
EN IEC 55014-2:2021(EN 61000-4-2:2009, EN 61000-4-3:2006+A2:2010,
EN 61000-4-4:2012, EN 61000-4-5:2014+A1:2017, EN IEC 61000-4-6:2019,
EN 61000-4-8:2010, EN IEC 61000-4-11:2020)

The EUT described above is tested by Dongguan True Safety Testing Co., Ltd. EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. Dongguan True Safety Testing Co., Ltd. EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the 2014/30/EU directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Tested by:

Test Engineer

Reviewer :

Supervisor

Approved & Authorized Signer :

Andy/Manager





1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

| Test Items | Test Results |
|---------------------------------------|--------------|
| Power Line Conducted Emission Test | PASS |
| Disturbance Power Test | PASS |
| Harmonic Current Emission Test | PASS |
| Voltage Fluctuations & Flicker Test | PASS |
| Electrostatic Discharge Test | PASS |
| RF Field Strength Susceptibility Test | PASS |
| Electrical Fast Transient/Burst Test | PASS |
| Surge Test | PASS |
| Injected Currents Susceptibility Test | PASS |
| Voltage Dips And Interruptions Test | PASS |



2. GENERAL INFORMATION

2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that TST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that TST in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, TST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through TST, unless the applicant has authorized TST in writing to do so.

2.2. Measurement Uncertainty

Available upon request.



3. PRODUCT DESCRIPTION

3.1.EUT Description

| | | |
|--------------|---|---|
| Description | : | Treadmill |
| Applicant | : | Jinhua Youzhi Sports Equipment Co., Ltd No. 466, Donggang North Street, shoetang office, Jindong District, Jinhua City, Zhejiang Province (3rd floor, Building 6, Zhejiang Dongzheng Craft Products Co., Ltd.) |
| Manufacturer | : | Jinhua Youzhi Sports Equipment Co., Ltd No. 466, Donggang North Street, shoetang office, Jindong District, Jinhua City, Zhejiang Province (3rd floor, Building 6, Zhejiang Dongzheng Craft Products Co., Ltd.) |
| Model Number | : | YZ-Z1 |

3.2.Block Diagram of EUT Configuration



3.3.Operating Condition of EUT

Test mode 1: ON

3.4.Test Conditions

Temperature: 22-25°C

Relative Humidity: 50-68 %

3.5.Modifications

No modification was made.



3.6.Abbreviations

| | |
|-----|--------------------------------|
| AC | Alternating Current |
| AMN | Artificial Mains Network |
| DC | Direct Current |
| EM | ElectroMagnetic |
| EMC | ElectroMagnetic Compatibility |
| EUT | Equipment Under Test |
| IF | Intermediate Frequency |
| RF | Radio Frequency |
| rms | root mean square |
| EMI | Electromagnetic Interference |
| EMS | Electromagnetic Susceptibility |

3.7.Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.



4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|-----------------|-----------|------------|-------------|---------------|
| 1. | Test Receiver | Rohde & Schwarz | ESHS30 | 828985/018 | Apr. 11, 23 | 1 Year |
| 2. | Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100006 | Apr. 11, 23 | 1 Year |
| 3. | L.I.S.N. | Rohde & Schwarz | ESH2-Z5 | 834549/005 | Apr. 11, 23 | 1 Year |
| 4. | Conical | Emtek | N/A | N/A | N/A | N/A |
| 5. | Voltage Probe | Schwarzbeck | TK9416 | N/A | Apr. 11, 23 | 1 Year |
| 6. | Coaxial Switch | Anritsu | MP59B | 6100214550 | Apr. 11, 23 | 1 Year |

4.2. For Disturbance Power Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|-----------------|-----------|------------|-------------|---------------|
| 1. | Test Receiver | Rohde & Schwarz | ESHS30 | 828985/018 | Apr. 11, 23 | 1 Year |
| 2. | Power Clamp | Rohde & Schwarz | MDS21 | 833711/025 | Apr. 11, 23 | 1 Year |
| 3. | Coaxial Switch | Anritsu | MP59B | 6100214550 | Apr. 11, 23 | 1 Year |

4.3. For Harmonic / Flicker Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-----------------------------|--------------|-----------|------------|-------------|---------------|
| 1. | Power Frequency test system | HAEFELY | PHF555 | 080419-03 | Apr. 11, 23 | 1 Year |

4.4. For Electrostatic Discharge Immunity Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|------------|--------------|-----------|------------|-------------|---------------|
| 1. | ESD Tester | HAEFELY | PSD 1600 | H911'292 | Apr. 11, 23 | 1 Year |

4.5. For RF Strength Susceptibility Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------------|--------------|-------------|------------|-------------|---------------|
| 1. | Signal Generator | HP | 8648A | 3633A02081 | Apr. 11, 23 | 1 Year |
| 2. | Amplifier | A&R | 500A100 | 17034 | NCR | NCR |
| 3. | Amplifier | A&R | 100W/1000M1 | 17028 | NCR | NCR |
| 4. | Isotropic Field Monitor | A&R | FM2000 | 16829 | NCR | NCR |
| 5. | Isotropic Field Probe | A&R | FLW220100 | 16755 | Apr. 11, 23 | 1 Year |
| 6. | Biconic Antenna | EMCO | 3108 | 9507-2534 | NCR | NCR |
| 7. | Log-periodic Antenna | A&R | AT1080 | 16812 | NCR | NCR |
| 8. | PC | N/A | 486DX2 | N/A | N/A | N/A |

4.6. For Electrical Fast Transient/Burst Immunity Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------|--------------|-----------|------------|-------------|---------------|
| 1. | Burst Tester | HAEFELY | PEFT 4010 | 080981-16 | Apr. 11, 23 | 1 Year |

4.7. For Surge Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------|--------------|-----------|------------|-------------|---------------|
| 1. | Surge Tester | HAEFELY | PSURGE4.1 | 080107-04 | Apr. 11, 23 | 1 Year |



4.8.For Injected Currents Susceptibility Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-----------------|--------------|-------------|--------------|-------------|---------------|
| 1. | Simulator | EMTEST | CWS 500C | 0900-12 | Apr. 11, 23 | 1 Year |
| 2. | CDN | EMTEST | CDN-M2 | 510010010010 | Apr. 11, 23 | 1 Year |
| 3. | VDN | EMTEST | CDN-M3 | 0900-11 | Apr. 11, 23 | 1 Year |
| 4. | Injection Clamp | EMTEST | F-2031-23MM | 368 | Apr. 11, 23 | 1 Year |
| 5. | Attenuator | EMTEST | ATT6 | 0010222a | Apr. 11, 23 | 1 Year |

4.9.For Magnetic Field Immunity Test


| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-----------------------|--------------|-----------|------------|-------------|---------------|
| 1. | Magnetic Field Tester | HEAFELY | MAG100.1 | 083858-10 | Apr. 11, 23 | 1 Year |

4.10.For Voltage Dips and Interruptions Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------|--------------|------------|------------|-------------|---------------|
| 2. | Dips Tester | HEAFELY | PLINE 1610 | 083732-18 | Apr. 11, 23 | 1 Year |

5. POWER LINE CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

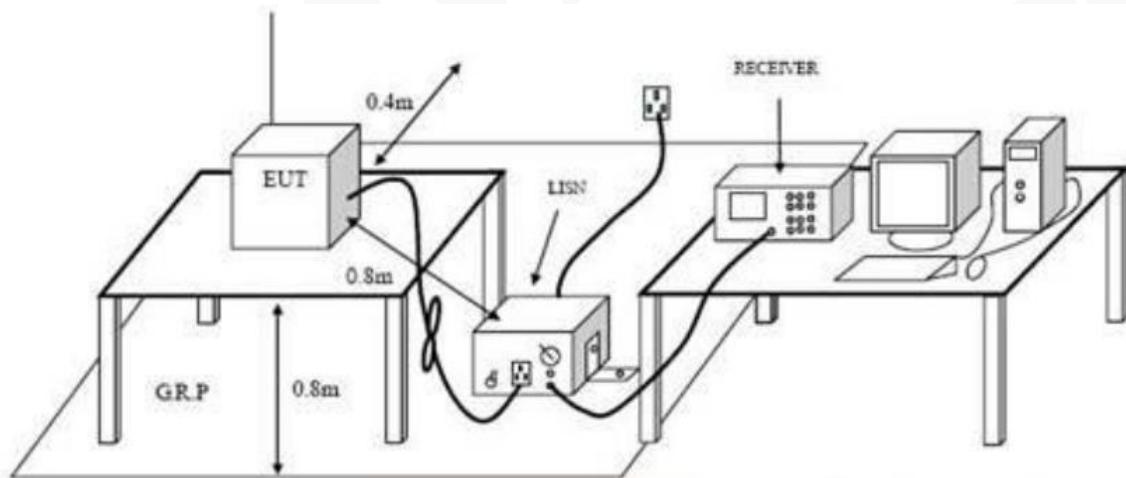

5.2. Test Standard

EN 55014-1:2017/A11:2020

5.3. Power Line Conducted Emission Limit

| Frequency MHz | Limits dB(μ V) | |
|------------------|---------------------|---------------|
| | Quasi-peak Level | Average Level |
| 0.15 ~ 0.50 | 66 ~ 56* | 59 ~ 46* |
| 0.50 ~ 5.00 | 56 | 46 |
| 5.00 ~ 30.00 | 60 | 50 |

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN 55014 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.1. EUT Information

Model Number : YZ-Z1
Serial Number : YZ-Z2, YZ-Z6, YZ-Z8, C1, OT-1, BT-1, U6, A1, BT-2, TS-8
Manufacturer : Jinhua Youzhi Sports Equipment Co., Ltd



5.5.Operating Condition of EUT

5.5.1.Setup the EUT and simulators as shown in Section 5.1.

5.5.2.Turn on the power of all equipments.

5.5.3.Let the EUT work in test modes (on) and test it.

5.6.Test Procedure

The EUT is put on the ground and connected to the AC mains through a Artificial Mains Network (AMN). This provided 50ohm-coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the EN 55014-1 regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.


The frequency range from 150 KHz to 30 MHz is investigated. and all the scanning waveform is put in **Appendix I**.

5.7.Test Result

PASS.

6. DISTURBANCE POWER TEST

6.1. Block Diagram of Test Setup

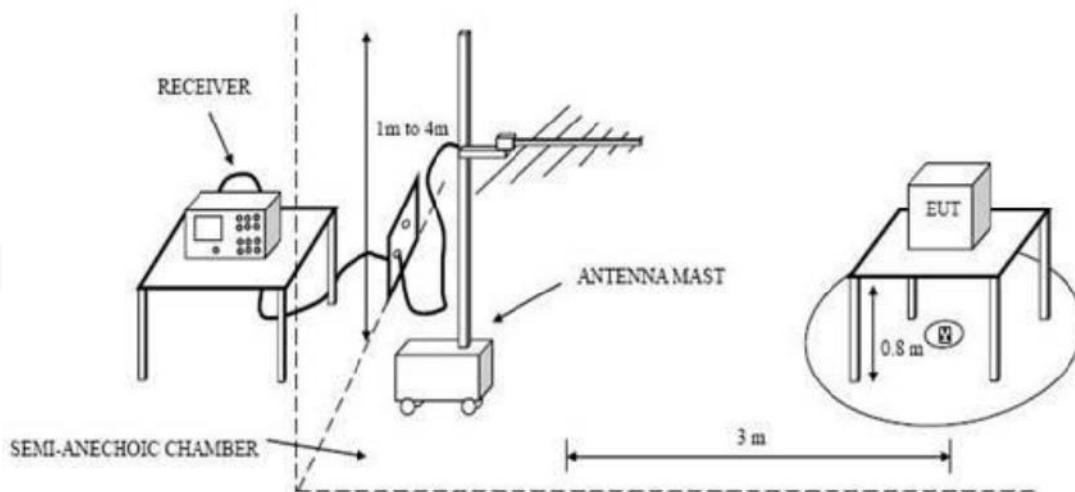

6.2. Disturbance Power Limit

All emanations from devices or system including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

| Frequency MHz | Interference Power Limits dB(pW) | |
|------------------|--|--|
| | Quasi-peak Value | Average Value |
| 30 ~ 300 | 45 Increasing Linearly with Frequency to 55 (Q.P.) | 35 Increasing Linearly with Frequency to 45 (A.V.) |

6.3. EUT Configuration on Test

The EN 55014 regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 3.2

6.4. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.1., except the test set up replaced as Section 6.1.



6.5. Test Procedure

The EUT is placed on the ground and away from other metallic surface at least 0.4m. It is connected to the power mains through an extension cord of 6m min. The absorber clamp clamps the cord and moves from the far end to the EUT to measure the disturbing energy emitted from the cord.

The bandwidth of the test receiver(R&S ESVS30) is set at 120kHz.

All the test results are listed in Section 6.6.

The frequency spectrum from 30 MHz to 300 MHz is investigated.


As the peak value is too low against the limit, so the quasi-peak value and average value have omitted. All the scanning waveforms are attached in **Appendix II**.

6.6. Disturbance Power Test Result

PASS.

7. HARMONIC CURRENT EMISSION TEST

7.1. Block Diagram of Test Setup

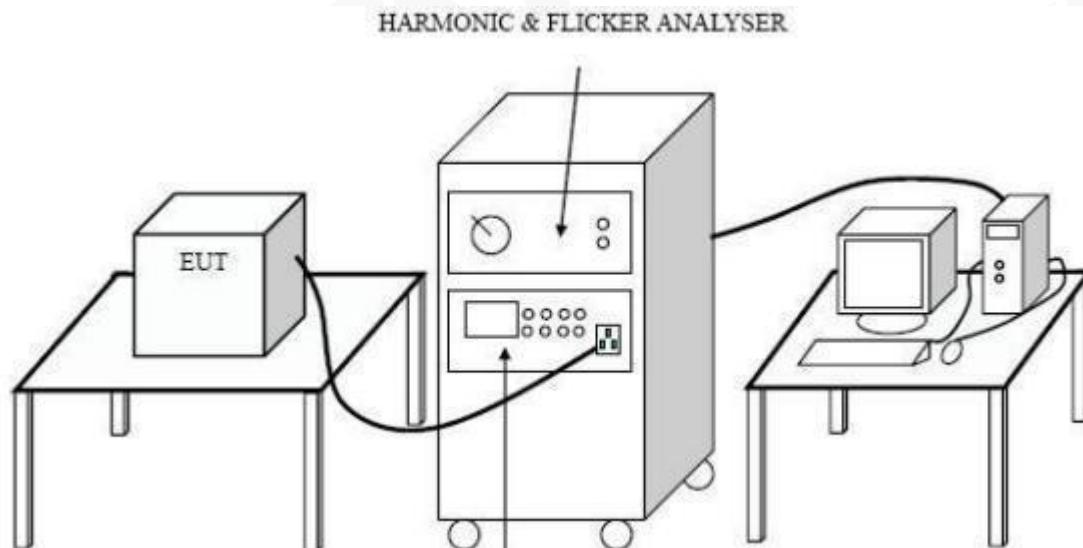

7.2. Test Standard and Limit

7.2.1. Test Standard

EN IEC 61000-3-2:2019+A1:2021

7.2.2. Limits

Table 12 Harmonic Current Test Limit (Class A)



| Harmonic order (n) | Maximum permissible harmonic current (A) |
|-----------------------|---|
| Odd harmonics | |
| 3 | 2.30 |
| 5 | 1.14 |
| 7 | 0.77 |
| 9 | 0.40 |
| 11 | 0.33 |
| 13 | 0.21 |
| $15 \leq n \leq 39$ | $0.15 \times 15/n$ |
| Even harmonics | |
| 2 | 1.08 |
| 4 | 0.43 |
| 6 | 0.30 |
| $8 \leq n \leq 40$ | $0.23 \times 8/n$ |

7.3. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

7.4. Test Results

PASS.



8. VOLTAGE FLUCTUATIONS & FLICKER TEST

8.1. Block Diagram of Test Setup

Same as Section 7.1..

8.2. Test Standard

EN 61000-3-3:2013+A2:2021

8.3. Operating Condition of EUT

Same as Section 7.3.. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

| Test items | Limits |
|------------|---------------------------|
| Pst | 1.0 |
| dc | 3.3% |
| dmax | 4.0% |
| dt | Not exceed 3.3% for 500ms |

8.4. Test Data

Flicker test Data


| Model No.: YZ-Z1 | | |
|------------------|---------|---------------------------|
| Test Mode: 1 | | |
| Items | Reading | Limit |
| dmax | 0.04 | 4.0% |
| dc | 0.02 | 3.3% |
| dt | 0.05 | Not exceed 3.3% for 500ms |
| Pst | 0.001 | 1.0 |

8.5. Test Results


PASS.

9. ELECTROSTATIC DISCHARGE TEST

9.1. Block Diagram of ESD Test Setup

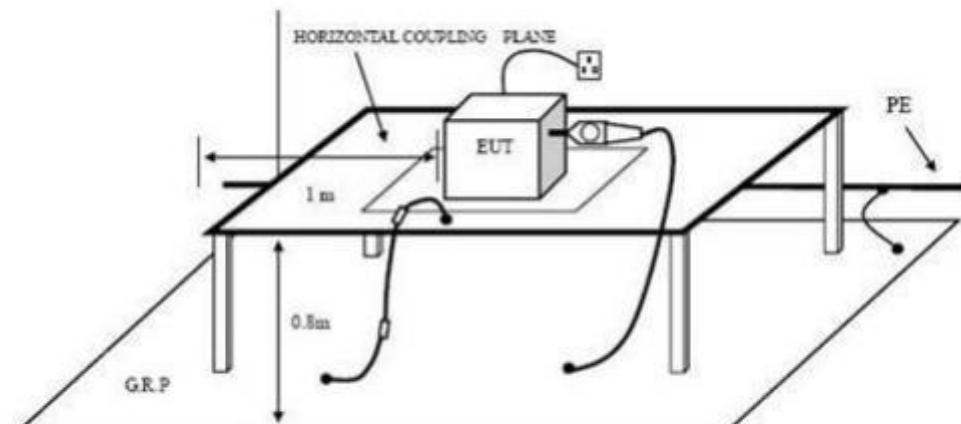

DIRECT DISCHARGE SETUP

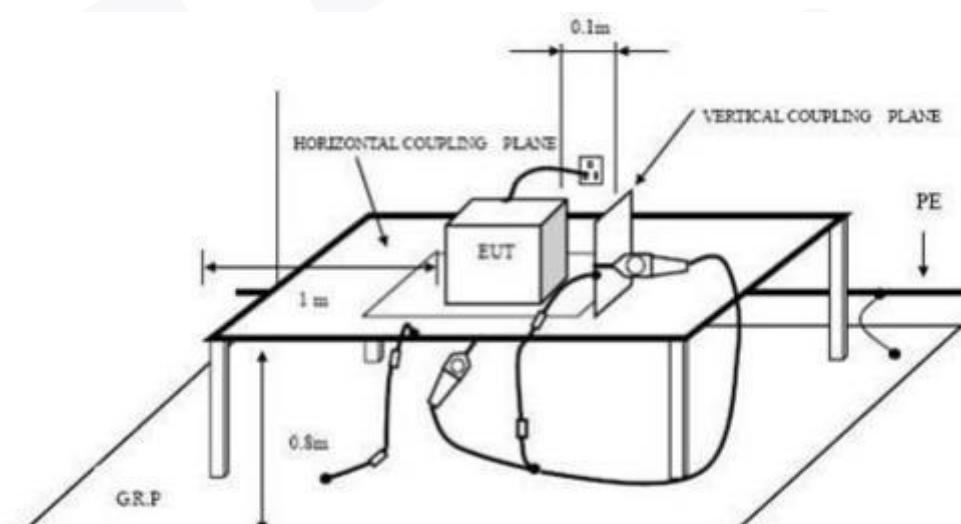

INDIRECT DISCHARGE SETUP

9.2. Test Standard

EN IEC 55014-2:2021 (EN 61000-4-2:2009)
Severity Level 3 for Air Discharge at 8KV
Severity Level 2 for Contact Discharge at 4KV



9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

| Level | Test Voltage Contact Discharge (KV) | Test Voltage Air Discharge (KV) |
|-------|--|------------------------------------|
| 1. | 2 | 2 |
| 2. | 4 | 4 |
| 3. | 6 | 8 |
| 4. | 8 | 15 |
| X. | Special | Special |

9.3.2. Performance criterion: B

9.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

9.5. Operating Condition of EUT

9.5.1. Setup the EUT as shown in Section 9.1..

9.5.2. Turn on the power of all equipments.

9.5.3. Let the EUT work in test mode (on) and test it.

9.6. Test Procedure

9.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.

After each discharge, the discharge electrode shall be removed from the EUT.

The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

9.6.2. Contact Discharge:

All the procedure shall be same as Section 9.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

9.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.



9.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.7. Test Results

PASS.

Please refer to the following page.



Electrostatic Discharge Test Results

Dongguan True Safety Testing Co., Ltd.

| | | | |
|---------------|---|-------------|-----------------|
| Applicant | : Jinhua Youzhi Sports Equipment Co., Ltd | Test Date | : Dec. 12, 2022 |
| EUT | : Treadmill | Temperature | : 25 °C |
| M/N | : YZ-Z1 | Humidity | : 55 % |
| Power Supply | : 220V 50Hz | Test Mode | : on |
| Test Engineer | : | | |

Air Discharge: $\pm 8KV$ For each point positive 10 times and negative 10 times discharge.


Contact Discharge: $\pm 4KV$

| Location | Kind A-Air Discharge C-Contact Discharge | Result |
|------------|--|--------|
| Slots | A | PASS |
| Button | A | PASS |
| Metal part | C | PASS |
| Screw | C | PASS |
| HCP | C | PASS |
| VCP | C | PASS |

Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

10. RF FIELD STRENGTH SUSCEPTIBILITY TEST

10.1.R/S Test Setup

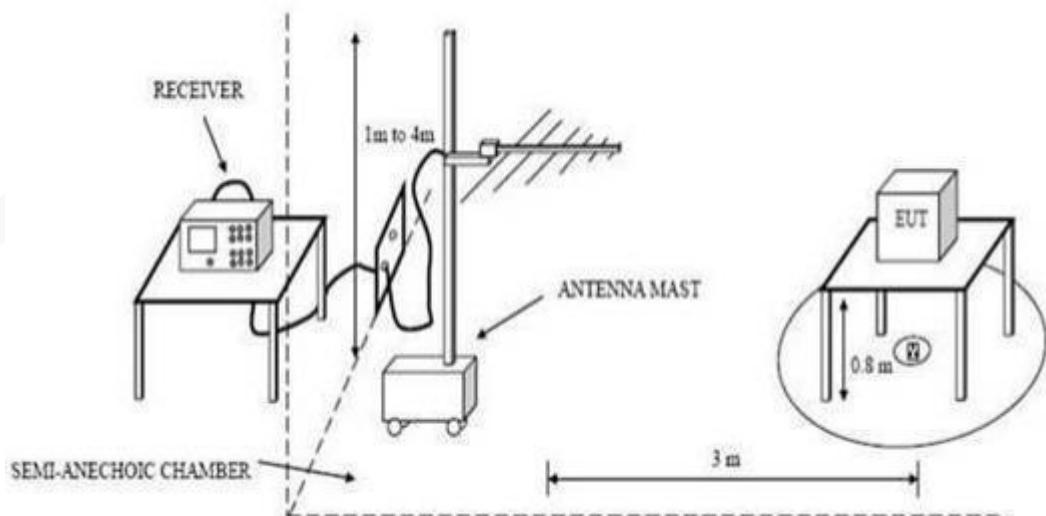

10.2.Test Standard

EN IEC 55014-2:2021 (EN 61000-4-3:2006+A2:2010)
Severity Level 2 at 3V / m

10.3.Severity Levels and Performance Criterion

10.3.1.Severity level

| Level | Field Strength V/m |
|-------|--------------------|
| 1. | 1 |
| 2. | 3 |
| 3. | 10 |
| X. | Special |

10.3.2.Performance criterion : A

10.4.EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..



10.5.Operating Condition of EUT

Setup the EUT as shown in Section 10.1.. The operating condition of EUT are listed in section 3.3.

10.6.Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor the EUT.

All the scanning conditions are as follows :

| Condition of Test | Remarks |
|------------------------------|------------------------------|
| 1. Fielded Strength | 3 V/m (Severity Level 2) |
| 2. Radiated Signal | Modulated |
| 3. Scanning Frequency | 80 - 1000 MHz, 1.4GHz-2.7GHz |
| 4. Sweeping time of radiated | 0.0015 decade/s |
| 5. Dwell Time | 1 Sec. |

10.7.Test Results

PASS.

Please refer to the following page.




RF Field Strength Susceptibility Test Results

Dongguan True Safety Testing Co., Ltd.

| | | | | | | | |
|---------------|---|--------------------------------|-------------------------------|-------------------------------------|-----|--|--|
| Applicant | Jinhua Youzhi Sports Equipment Co., Ltd | | Test Date | Dec. 12, 2022 | | | |
| EUT | Treadmill | | Temperature | 25 °C | | | |
| M/N | YZ-Z1 | | Humidity | 55 % | | | |
| Power Supply | 220V 50Hz | | Test Mode | on | | | |
| Test Engineer | | | Frequency Range | 80 MHz to 1000 MHz 1.4GHz-2.7GHz | | | |
| Modulation: | <input checked="" type="checkbox"/> AM | <input type="checkbox"/> Pulse | <input type="checkbox"/> none | 1 KHz | 80% | | |
| Criterion : A | | | | | | | |
| | Frequency Rang : 80-1000MHZ, 1.4GHz-2.7GHz | | | | | | |
| Steps | 1% | | 1% | | | | |
| | Horizontal | | | Vertical | | | |
| Front | Pass | | Pass | | | | |
| Right | Pass | | Pass | | | | |
| Rear | Pass | | Pass | | | | |
| Left | Pass | | Pass | | | | |

11. ELECTRICAL FAST TRANSIENT/BURST TEST

11.1. EFT Test Setup

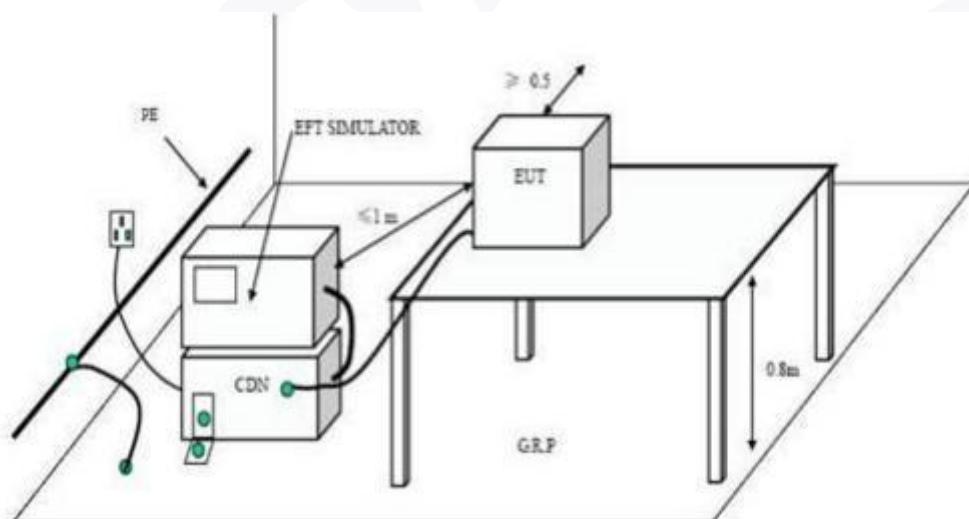

11.2. Test Standard

EN IEC 55014-2:2021 (EN 61000-4-4:2012)
Severity Level 2 at 1KV

11.3. Severity Levels and Performance Criterion

11.3.1. Severity level

| Open Circuit Output Test Voltage ±10% | | |
|---------------------------------------|-----------------------|---|
| Level | On Power Supply Lines | On I/O (Input/Output) Signal data and control lines |
| 1. | 0.5 KV | 0.25 KV |
| 2. | 1 KV | 0.5 KV |
| 3. | 2 KV | 1 KV |
| 4. | 4 KV | 2 KV |
| X | Special | Special |

11.3.2. Performance criterion : B

11.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

11.5. Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.



11.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

11.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

11.6.2. For signal lines and control lines ports:

It's necessary to test.

11.6.3. For DC output line ports:

It's unnecessary to test.

11.7. Test Results

PASS.

Please refer to the following page.




Electrical Fast Transient/Burst Test Results

Dongguan True Safety Testing Co., Ltd.

| Applicant | Jinhua Youzhi Sports Equipment Co., Ltd | | | | Test Date | Dec. 12, 2022 | | | | | | | |
|-------------------------|---|----------------|---------------|---------|-------------|---------------|----------------|---------------|---------|--|--|--|--|
| EUT | Treadmill | | | | Temperature | 25 °C | | | | | | | |
| M/N | YZ-Z1 | | | | Humidity | 55 % | | | | | | | |
| Power Supply | 220V 50Hz | | | | Test Mode | on | | | | | | | |
| Test Engineer | | | | | | | | | | | | | |
| Inject Place : AC Mains | | | | | | | | | | | | | |
| Inject Line | Voltage KV | Inject Time(s) | Inject Method | Results | Inject Line | Voltage KV | Inject Time(s) | Inject Method | Results | | | | |
| L | ±I | 120 | Direct | PASS | | | | | | | | | |
| N | ±I | 120 | Direct | PASS | | | | | | | | | |
| L N | ±I | 120 | Direct | PASS | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

12. SURGE TEST

12.1. Surge Test Setup

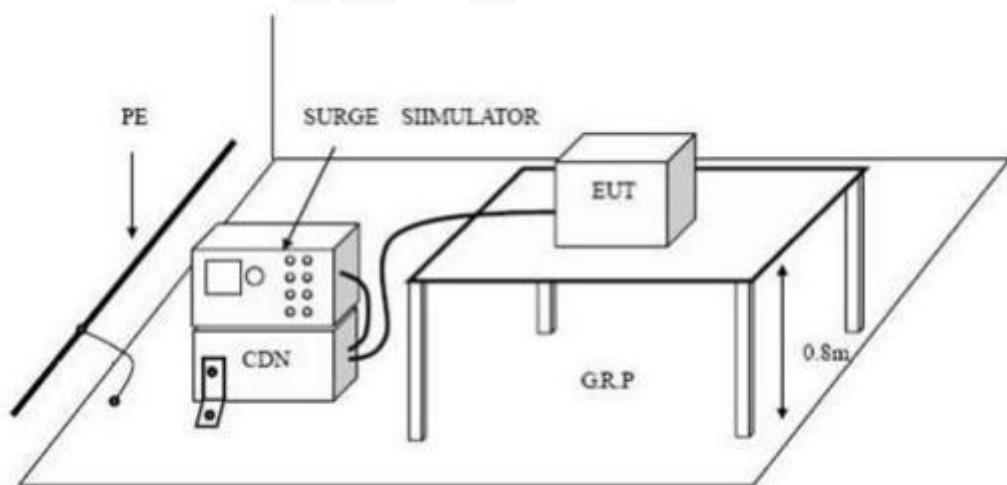

12.2. Test Standard

EN IEC 55014-2:2021 (EN 61000-4-5:2014+A1:2017)
Severity Level 2 for Line to Neutral at 1.0KV

12.3. Severity Levels and Performance Criterion

12.3.1. Severity level

| Severity Level | Open-Circuit Test Voltage KV |
|----------------|------------------------------|
| 1 | 0.5 |
| 2 | 1.0 |
| 3 | 2.0 |
| 4 | 4.0 |
| * | Special |

Performance criterion : **B**

12.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

12.5. Operating Condition of EUT

12.5.1. Setup the EUT as shown in Section 12.1..

12.5.2. Turn on the power of all equipments.



12.5.3.Let the EUT work in test mode (Full load) and test it.

12.6.Test Procedure

- 1) Set up the EUT and test generator as shown on Section 12.1
- 2) For line to line coupling mode, provide a 0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.7.Test Results

PASS.

Please refer to the following page.




Surge Immunity Test Results

Dongguan True Safety Testing Co., Ltd.

| Applicant | Jinhua Youzhi Sports Equipment Co., Ltd | | | Test Date | Dec. 12, 2022 |
|---------------|---|-------------|-------------|--------------------|---------------|
| EUT | Treadmill | | | Temperature | 25 °C |
| M/N | YZ-Z1 | | | Humidity | 55 % |
| Power Supply | 220V 50Hz | | | Test Mode | on |
| Test Engineer | : | | | | |
| Location | Polarity | Phase Angle | No of Pulse | Pulse Voltage (KV) | Result |
| L-N | + | 0 | 5 | 1.0 | PASS |
| | + | 90 | 5 | 1.0 | PASS |
| | + | 180 | 5 | 1.0 | PASS |
| | + | 270 | 5 | 1.0 | PASS |
| | - | 0 | 5 | 1.0 | PASS |
| | - | 90 | 5 | 1.0 | PASS |
| | - | 180 | 5 | 1.0 | PASS |
| | - | 270 | 5 | 1.0 | PASS |

13. INJECTED CURRENTS SUSCEPTIBILITY TEST

13.1. Block Diagram of Test AC Mains Setup

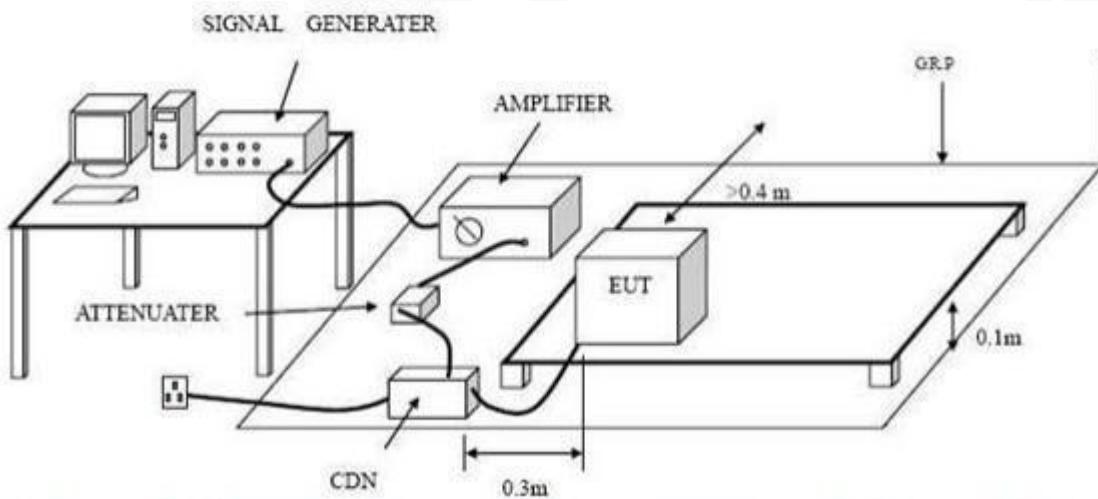

13.2. Test Standard

EN IEC 55014-2:2021 (EN IEC 61000-4-6:2019)
Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

13.3. Severity Levels and Performance Criterion

13.3.1. Severity level

| Level | Field Strength V/m |
|-------|--------------------|
| 1. | 1 |
| 2. | 3 |
| 3. | 10 |
| X | Special |

13.3.2. Performance criterion: A

13.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

13.5. Operating Condition of EUT

Setup the EUT as shown in Section 13.1.. The operating condition of EUT are listed in section 3.3.



13.6. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 13.1.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.7. Test Results

PASS.

Please refer to the following page.




Injected Currents Susceptibility Test Results

Dongguan True Safety Testing Co., Ltd.

| Applicant | Jinhua Youzhi Sports Equipment Co., Ltd | | Test Date | Dec. 12, 2022 | |
|--------------------------|---|-------------------------|-------------|---------------|--|
| EUT | Treadmill | | Temperature | 25 °C | |
| M/N | YZ-Z1 | | Humidity | 55 % | |
| Power Supply | 220V 50Hz | | Test Mode | on | |
| Test Engineer | | | | | |
| Frequency Range (MHz) | Injected Position | Strength | Criterion | Result | |
| 0.15 ~ 20 | AC Line | 3V(rms), Unmodulated | A | PASS | |
| 20 ~ 80 | AC Line | 3V(rms), Unmodulated | A | PASS | |

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Voltage Dips and Interruptions Test Setup

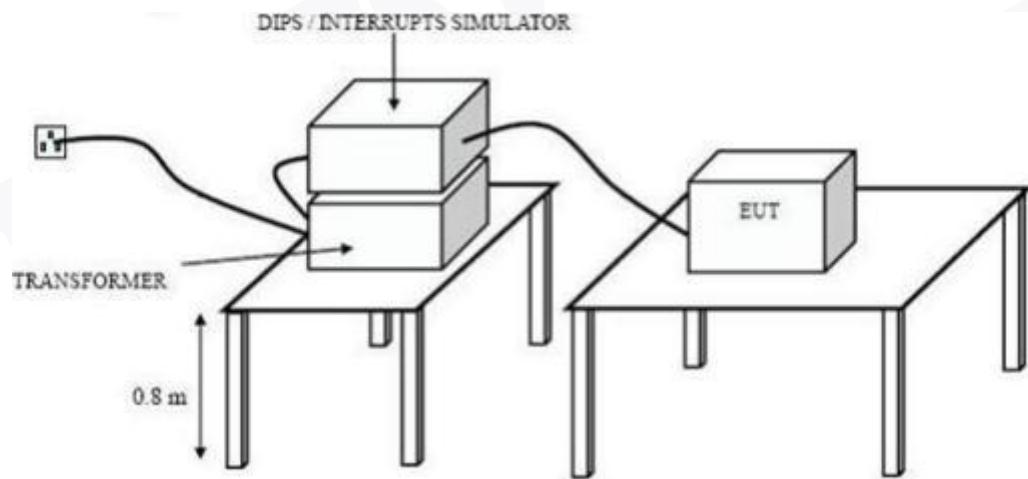

14.2. Test Standard

EN IEC 55014-2:2021 (EN IEC 61000-4-11:2020)

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

| Test Level %UT | Voltage dip and short interruptions %UT | Duration (in period) |
|-------------------|---|-------------------------|
| 0 | 100 | 250p |
| 40 | 60 | 5p |
| 70 | 30 | 0.5p |

14.3.2. Performance criterion : C & B

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

14.5. Operating Condition of EUT

14.5.1. Setup the EUT as shown in Section 14.1..

14.5.2. Turn on the power of all equipments.



14.5.3.Let the EUT work in test mode (SPEAKERS Playing) and test it.

14.6.Test Procedure

- 1) Set up the EUT and test generator as shown on Section 14.1.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

14.7.Test Result

PASS.

Please refer to the following page.




Voltage Dips And Interruptions Test Results

Dongguan True Safety Testing Co., Ltd.

| Applicant | Jinhua Youzhi Sports Equipment Co., Ltd | | Test Date | Dec. 12, 2022 | |
|--------------------------------|---|-------------------------|-------------|---------------|--------|
| EUT | Treadmill | | Temperature | 25 °C | |
| M/N | YZ-Z1 | | Humidity | 55 % | |
| Power Supply | 220V 50Hz | | Test Mode | on | |
| Test Engineer | | | | | |
| Test Level % U _T | Voltage Dips & Short Interruptions % U _T | Duration (in period) | Phase Angle | Criterion | Result |
| 0 | 100 | 250P | 0° ~360° | C | PASS |
| 40 | 60 | 5P | 0° ~360° | C | PASS |
| 70 | 30 | 0.5P | 0° ~360° | B | PASS |



APPENDIX I

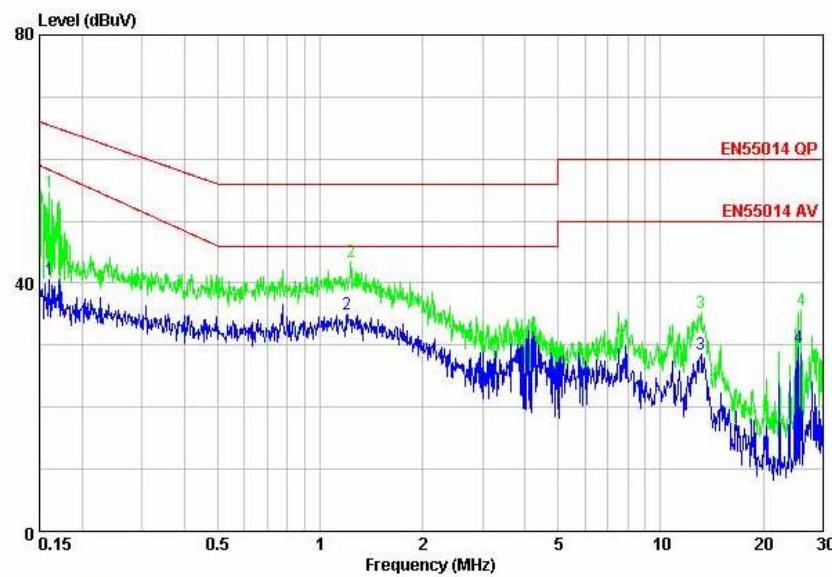

Condition


: EN55014 QP NEUTRAL
: RBW:9.000KHz VBW:30.000KHz SWT:0.001sec

| Freq MHz | Level dBuV | Limit | | Remark | Pol/Phase |
|-------------|---------------|-------|-------|----------------|-----------|
| | | Line | Over | | |
| 1 max | 0.16 | 40.55 | 55.43 | -14.88 Average | NEUTRAL |
| 2 | 1.20 | 34.92 | 46.00 | -11.08 Average | NEUTRAL |
| 3 | 13.13 | 28.55 | 50.00 | -21.45 Average | NEUTRAL |
| 4 | 25.46 | 29.63 | 50.00 | -20.37 Average | NEUTRAL |

Condition

: EN55014 QP NEUTRAL
: RBW:9.000KHz VBW:30.000KHz SWT:0.001sec

| Freq MHz | Level dBuV | Limit | | Remark | Pol/Phase |
|-------------|---------------|-------|-------|-------------|-----------|
| | | Line | Over | | |
| 1 max | 0.16 | 54.53 | 65.43 | -10.90 Peak | NEUTRAL |
| 2 | 1.23 | 43.55 | 56.00 | -12.45 Peak | NEUTRAL |
| 3 | 13.13 | 35.20 | 60.00 | -24.80 Peak | NEUTRAL |
| 4 | 25.86 | 35.59 | 60.00 | -24.41 Peak | NEUTRAL |

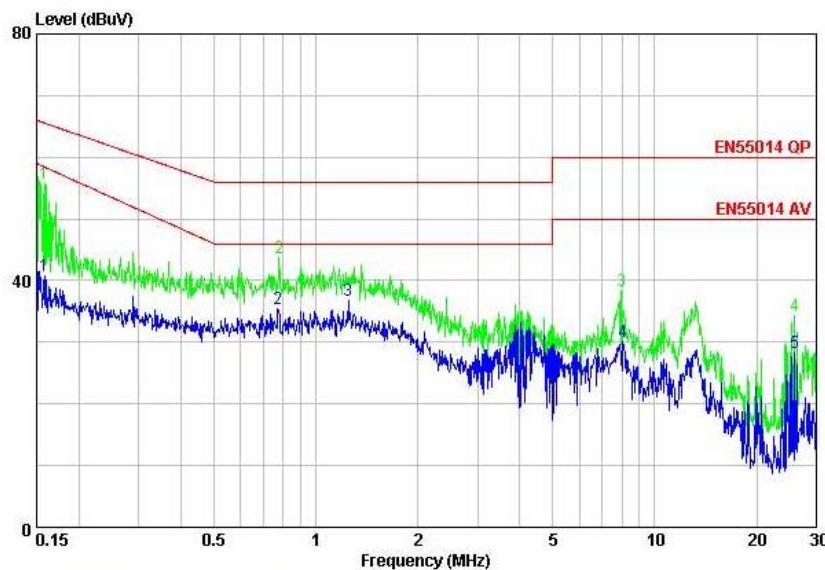

Condition

: EN55014 QP LINE
: RBW:9.000KHz VBW:30.000KHz SWT:0.001sec

| Freq MHz | Level dBuV | Limit | | Remark | Pol/Phase |
|-------------|---------------|-------|-------|--------|-----------|
| | | Line | Over | | |
| 1 max | 0.16 | 40.74 | 55.56 | -14.82 | Average |
| 2 | 0.77 | 35.49 | 46.00 | -10.51 | Average |
| 3 | 1.25 | 36.70 | 46.00 | -9.30 | Average |
| 4 | 8.06 | 30.03 | 50.00 | -19.97 | Average |
| 5 | 25.86 | 28.29 | 50.00 | -21.71 | Average |


Condition

: EN55014 QP LINE
: RBW:9.000KHz VBW:30.000KHz SWT:0.001sec

| Freq MHz | Level dBuV | Limit | | Remark | Pol/Phase |
|-------------|---------------|-------|-------|--------|-----------|
| | | Line | Over | | |
| 1 max | 0.16 | 55.67 | 65.56 | -9.89 | Peak |
| 2 | 0.78 | 43.65 | 56.00 | -12.35 | Peak |
| 3 | 7.98 | 38.33 | 60.00 | -21.67 | Peak |
| 4 | 25.86 | 34.37 | 60.00 | -25.63 | Peak |



APPENDIX II

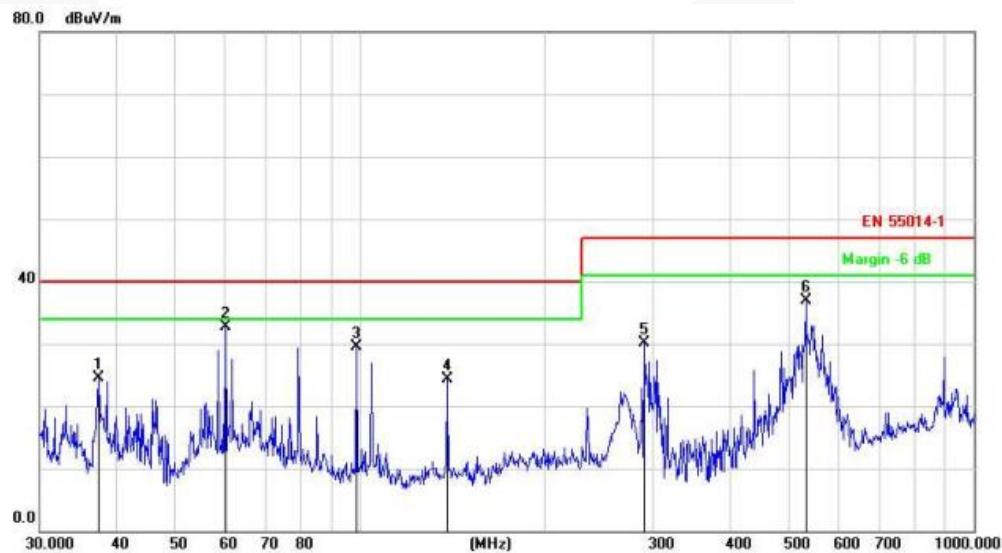

Site: LAB Polarization: **Vertical** Temperature:
Limit: EN 55014-1 Power: Humidity:
EUT: Distance:
M/N:
Mode:
Note:

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector | Antenna Height cm | Table Degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|-------------------------|-----------------|---------|
| 1 | | 37.4165 | 42.57 | -18.14 | 24.43 | 40.00 | -15.57 | peak | | | |
| 2 * | | 60.2801 | 51.40 | -18.78 | 32.62 | 40.00 | -7.38 | peak | | | |
| 3 | | 98.4866 | 50.08 | -20.63 | 29.45 | 40.00 | -10.55 | peak | | | |
| 4 | | 138.3873 | 42.90 | -18.63 | 24.27 | 40.00 | -15.73 | peak | | | |
| 5 | | 290.0172 | 48.93 | -18.88 | 30.05 | 47.00 | -16.95 | peak | | | |
| 6 | | 531.9635 | 51.22 | -14.39 | 36.83 | 47.00 | -10.17 | peak | | | |



Site: LAB

Polarization: **Horizontal**

Temperature:

Limit: EN 55014-1

Power:

Humidity:

EUT:

Distance:

M/N:

Mode:

Note:

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Antenna Height cm | | | Table Degree |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|-------------------------|--------|---------|-----------------|
| | | | | | | | | Detector | degree | Comment | |
| 1 | | 42.1542 | 39.91 | -17.94 | 21.97 | 40.00 | -18.03 | peak | | | |
| 2 | | 67.2022 | 38.97 | -19.60 | 19.37 | 40.00 | -20.63 | peak | | | |
| 3 | | 164.9075 | 44.75 | -16.45 | 28.30 | 40.00 | -11.70 | peak | | | |
| 4 | | 269.4284 | 51.85 | -19.03 | 32.82 | 47.00 | -14.18 | peak | | | |
| 5 | | 299.3158 | 54.70 | -18.30 | 36.40 | 47.00 | -10.60 | peak | | | |
| 6 | * | 729.3583 | 47.79 | -11.31 | 36.48 | 47.00 | -10.52 | peak | | | |



APPENDIX III

Photo 1 General appearance of the EUT**Photo 2 General appearance of the EUT**

**Photo 3 General appearance of the EUT****Photo 4 General appearance of the EUT*******End of report*****

