Bathroom Faucet Installation

Two Handle Widespread Bathroom Faucet

Note:

The inlet pipe cannot be bent excessively (Figure 1)
The inlet pipe should not be twisted excessively (Figure 2)
The Maximum thickness of mounting plate is 1 3/16" or 30mm (Figure 3)
Left hole-Hot, right hole-Cold (Figure 4)



Figure 1



Figure 2

Figure 3



Figure 4

		
① Inlet water hose x 2	② Mixed water pipe	③ Spout lock screws
		
④ Gasket (Rubber gasket a, stainless steel gasket b)	⑤ Handle lock nuts	⑥ Pop-up Drain

Componnents list

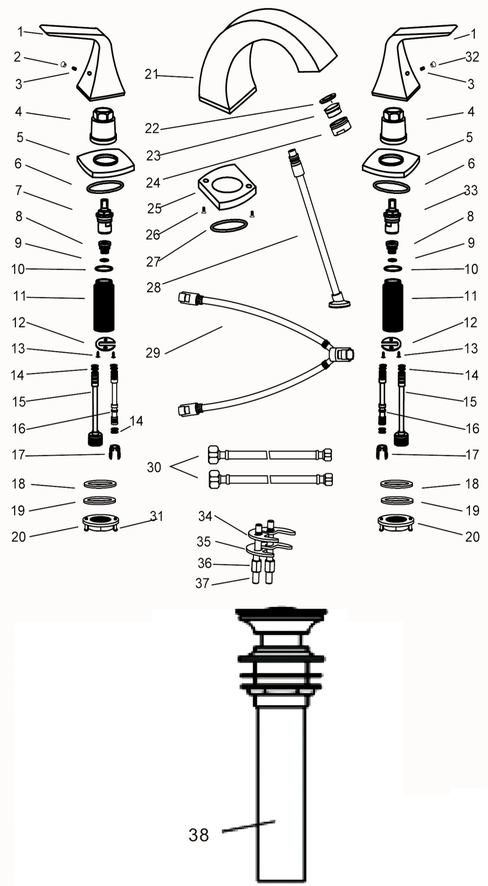

NO.:	Part Name	Material
1	Handle	Zinc
2	Handle button	Rubber
3	Set Screw	Stainless steel
4	Lock Nut	Zinc
5	Handle Base	Zinc
6	O Ring	Rubber
7	Cartridge（Hot）	Plastic+Ceramic
8	Connector	Plastic
9	O Ring	Rubber
10	O Ring	Rubber
11	Under Body	Plastic
12	Metal Washer	Stainless steel
13	Screw	Stainless steel
14	O Ring	Rubber
15	Hose	Brass
16	Hose	Brass
17	Connector	Plastic
18	Rubber Washer	Rubber
19	Metal Washer	Stainless steel
20	Lock Nut	Zinc
21	Spout	Zinc
22	Rubber Washer	Rubber
23	Cascade	Plastic
24	Sleeve	Brass
25	Spout Base	Zinc
26	Screw	Stainless steel
27	O Ring	Rubber
28	Hose	Plastic
29	Mixed water pipe	Plastic
30	Hose	Brass+Niloy
31	Screw	Stainless steel
32	Handel button	Rubber
33	Cartridge（Cold）	Plastic+Ceramic
34	Rubber Washer	Rubber
35	Metal Washer	Stainless steel
36	Lock Nut	Brass
37	Screw	Stainless steel
38	Pop-up Waste	Plastic

Faucet Installation

A

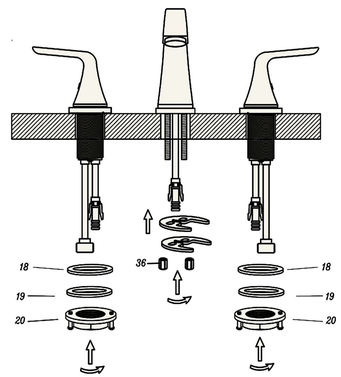

put faucet body and spout through reserved holes, adjust direction of faucet and spout. Install spout lock screw③ and gasket④ to faucet and scre tight. Gasket a first, b second.

B

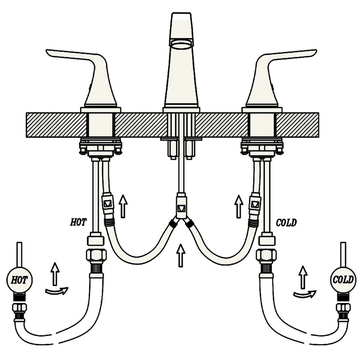

Connect inlet hoses① with faucet body and mixer water pipe② with spout. Connect both inlet hoses to hot and cold water spply. Test after screw tight all connections.

A



1. Whilst modern plating techniques are used during manufacturer of this product, if not correctly

B



2. It is recommended to clean the faucet with a soft damp cloth only, harsh stains should be removed by using dish washing liquid.

C



3. Chemicals or scourers will damage the faucet.