

## Installation Instruction

Thoroughly inspect the product and/or its components before installation. Please report any damaged or missing components for a replacement, return or repair. Your request will be responded within 12 hours.

The information provided in this instruction are general guidelines and a licenced professional should always be used during installation. Consult local building codes to ensure the installation complies with standards in your area. The warranty will be void if the product is installed with a conspicuous defect.

### Grating And Parts

A. Normal Tile Series B. New Tile Series C. New Classic Series D. Classic Series E. Stealth Series

Note: Only ONE piece of your ordered grating in the packing box.



### Linear Drain Contents


- 1 Designer or Tile-in Grate(A)—1
- 2 Linear Drain Channel/Base (B)—1
- 3 Adjustable Leveling Feet (C)—2
- 4 2" Threaded Coupling Adapter (D)—1
- 5 Hair/Debris Catcher Basket (E)—1
- 6 Lifting Key (F)—1
- 7 Drain Base(G)—(Not Included)



- 1 Shower Drain Grate
- 2 Shower drain channel with strainer
- 3 Rubber coupling Advanced Edition
- 4 Shower drain channel with strainer adapter & rubber coupling



- 1 Shower Drain Grate
- 2 Shower drain channel with strainer
- 3 Rubber coupling Advanced Edition
- 4 Shower drain channel with strainer adapter & rubber coupling



### Preparation

Note - Once clamp on drain base has been connected to the Sch. 40 drain pipe and the shower pan liner has been installed and tested to local jurisdiction guidelines, you can begin the installation of your decorative drain.


Please do not remove the Designer Grate (A) from its protective bag/cover until step 7 below has been completed.

1. Remove and discard the traditional strainer barrel, if present, from the clamp down drain base (G).
2. Thread the 2" coupling adapter(D) into clamp down drain base (G).
3. Determine finished height of drain and push drain channel (B) into the 2" threaded coupling adapter (D).
4. Level linear drain channel by rotating feet by hand - counterclockwise to raise or clockwise to lower drain.
5. Pour concrete/mortar in a sloped direction towards the linear/square drain channel. Maintain slope towards drain per code. Once concrete/mortar has cured, install thin set and tile per manufacturer's recommendation.
6. The finished tile height should be about 1/16" higher than the linear drain channel edge(B).
7. Apply a thin bead of silicone around the drain to fill any gaps between the drain channel edge(B) and the tile.
8. Remove grate from protective bag/cover, and insert the Designer Grate (A) in the drain channel (B).
9. For Tile-in option - install matching tile inside the tile-in grate or flip the tile-in grate for a modern stainless look.

Note: Wait for 48 hours before using your shower.

## Installation Diagram

### Install With Drain Base

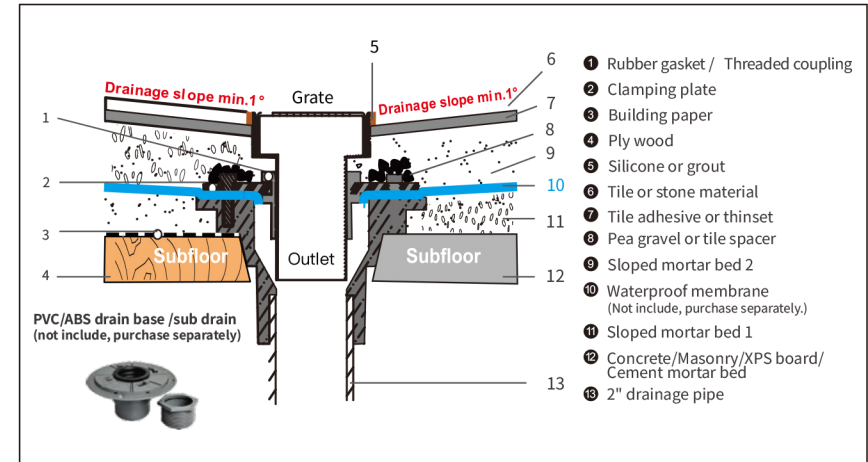



### Drain Base Assembly

(Not include ,purchase separately)

1. Rubber Coupling / Gasket
2. Threaded coupling
3. Membrane clamp
4. Stainless steel bolts
5. Drain flange/Drain base.
6. Waterproof membrane (not include)

#### Note:

- 1 Solvent-weld (glue) to same material DWV pipe with correct solvent cement.
- 2 Made of plastic ,do not work with Hot-mop waterproof to avoid deformation.
- 3 Mortar bed 2 plus tile and adhesive should be not less than 1-1/2"(40mm)
- 4 Consider the drain base diameter when you install the drain against the wall .

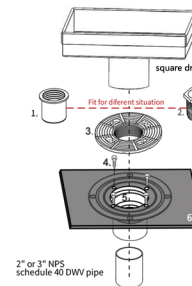

### Care & Maintenance

After installation, some aggressive substance such as sealant, adhesive, mortar maybe cause "yellow spot" on the channel, recommend using scour pad to remove such "spot", and always brushing in the direction of the grain. Periodically clean the fixture with non-abrasive cleaner or soft scrub.

For polished, matte black and oil rubber bronze finishes, we recommend cleaning with mild soap and soft cloth.

Do not use abrasive cleaners, ammoniated products, rubbing alcohol, detergents, astringents, bleach based cleaners, aggressive chemicals, abrasive cleaning pad, or harsh polishes on the fixture. Use of such substance may void the warranty.

### What We Will Do

If you find defects in normal installation (by a licensed professional plumber), use and service, please don't worry, you can contact us. We have a professional customer service team that can help you solve problems within 24 hours. You can also exchange or return for free. Not responsible for labor costs, installation, shipping, or other incidental or subsequent costs.


### What Is Not Covered

No liability is accepted for reasonable wear and tear, including defacement. Any damage to the drain resulting from reasonable wear and tear, misuse, abuse, neglect, accident or improper installation, maintenance or repair, including failure to follow applicable care and cleaning instructions, is not covered under warranty. We recommend using a professional plumber for all installations and repairs. Never use cleaners that contain abrasive cleaners, ammonia, bleach, acids, waves, alcohol solvents, or other products not recommended for use with chrome. This will void the warranty.

We recommend using a professional plumber for all installations and repairs. Never use cleaners that contain a brasive cleaners, ammonia, bleach, acids, waves, alcohol solvents, or other products not recommended for use with chrome. This will void the warranty. Please read the instructions carefully before installation.

### Site & Placement

Whether for a renovation or new construction, choosing the drain location is contingent on the waste line location, which may be predetermined or already installed. Moving a waste line may be possible, depending on site conditions.

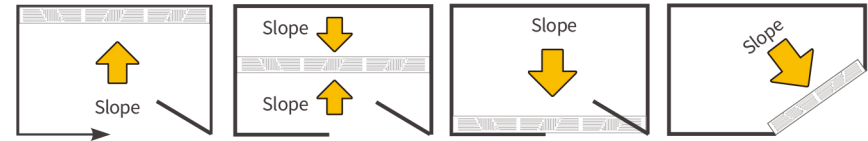

### Render drawing

