



# OWNER'S MANUAL

Installation & Operation

Applies to: ZGVS-ADJTA-TX



 **DISCLAIMERS*****Consumer warning against misuse:***

**Serious or fatal crushing injuries and asphyxiation can occur from improper use of this product.**

**To help prevent injuries:**

- The unit should be operated/supervised by an adult.
- While assembling the product, ensure no children or animals are in the same room.  
Carefully follow the assembly instructions in the manual.
- Never allow children or animals to climb into, on top of, or around this product, during installation or any time afterward.
- Never allow children or animals to handle the handheld remote control or phone app controls.
- Each time before using the remote control, first make sure no person or animal is underneath or close to the adjustable bed.

## CONTENTS

Safety & Warranty Warnings .....	01
Parts List .....	03
Electronics Quick Reference Guide .....	04
Installation Guide .....	05
Remote Control Instructions .....	06
Child Lock & Under Bed Lighting.....	07
Acoustic massage system .....	08
Positions & Presets .....	09
Massage .....	10
Remote Control Instructions- Pairing Remote & Setting Memory Position ...	11
Synchronizing Two Bases- Usage of Sync Cord .....	12
Instruction of pairing 2pcs bluetooth speakers of King base (2 x Twin XL) ...	13
Synchronizing Two Bases- Mode Selection .....	14
Instruction of AUX OUT cord .....	15
Instruction of Demo Mode .....	16
App Instructions .....	17
Instruction of Using Plastic Connectors .....	19
Emergency Battery Backup .....	20
Troubleshooting .....	21

## **Safety & Warranty Warnings**

---

### **READ THE FOLLOWING INFORMATION CAREFULLY BEFORE USING THIS PRODUCT**

If unable to understand warnings, cautions, and/or instructions, contact the dealer or technical personnel if applicable, before attempting to use the equipment. Otherwise, injury or damage may result.

#### **SAFETY WARNINGS:**

- Do not use bed outdoors.
- Do not use bed near explosives.
- Using bed with oxygen administering equipment other than the nasal masked type creates a possible fire hazard.
- When using nasal or masked type administering equipment, route and secure oxygen or air tubing properly to ensure that tubing does not become entangled or damaged during normal operation of the bed.
- Use caution when having liquids in or around the bed to ensure no spilling occurs. In case of spillage, stand in a dry, clean area of the floor and unplug the bed immediately. Clean up spill and allow the area around bed to dry thoroughly before using the electric controls again. Do not eat or drink hot liquids while operating the bed.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instructions concerning use of the appliance by a person responsible for their safety.
- Do not allow children or individuals with disabilities to operate the bed without adult supervision.
- Do not allow any person or pet under the bed at any time.
- During bed operation, make sure body is positioned within the confines of the bed. Do not place extremities over the sides of the bed when operating bed functions.

#### **WARRANTY WARNINGS:**

Do not open or tamper with control box, motors, or remote (with the exception of battery compartments). The warranty will be void if the internal workings of these components are tampered with.

**Product Rating:**

The motors are not designed to operate continuously for more than [2] minutes in an [18] minute time period or approximately 10% duty cycle. Attempting to circumvent or exceed this rating will shorten the life expectancy of the foundation and may void the warranty.

**Operating Information:**

- After power foundation assembly is completed, operate remote control to ensure proper functions.
- Keep moving parts free of obstruction during bed operation (including sheets, clothing, tubing, wiring, and products using electric power cords).
- Distribute body weight evenly over bed surface. Do not place entire weight on head or foot sections of the bed, during repositioning and entering or exiting bed.

**Hospital Use Disclaimer:**

This power foundation is designed for residential use only. It is not approved for hospital use and does not comply with hospital standards.

**Weight Limits:**

This product is not rated to support weights in excess of 750 pounds inclusive of the mattress and bedding. The bed will structurally support weight under this amount, provided it is evenly distributed across the foundation. The power foundation is not designed to support or lift this amount in the head or foot sections alone. Exceeding this weight restriction could damage the bed and/or cause injury and will void the warranty.

**▲ WARNING**

DO NOT USE THIS BED IF WEIGHT  
LIMITATION IS EXCEEDED

**RADIO FREQUENCY: 2.4 GHz****FCC COMPLIANCE:**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To comply with the FCC RF exposure requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirement and void user's right to operate the device.

## Parts List

---

**IMPORTANT!:** For your safety, read the owner's manual carefully and completely before operating this product. Electric shock may occur if electrical components are not installed or operated according to these guidelines.

A



Remote Control (1)  
AAA Battery (3)

B



Bed leg & Bottom Cap (6)

C



Power Supply & Power Cord (1)

D




Retainer Bar (1)

E



Sync Cord (1)


## Electronics Quick Reference Guide

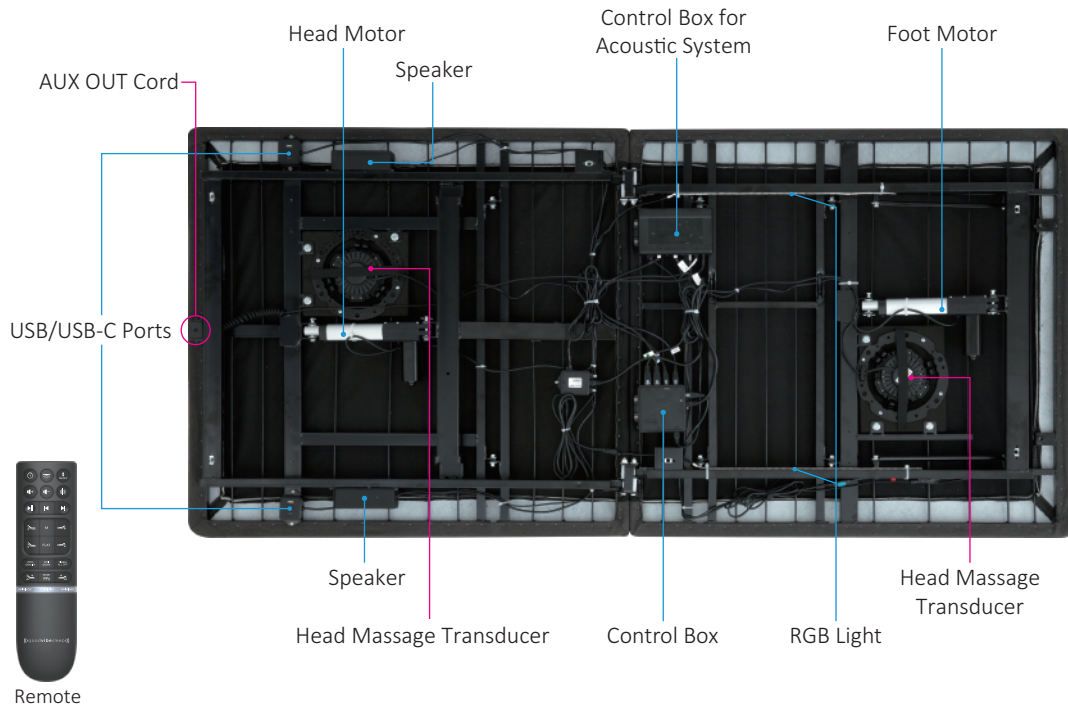


# Installation Guide

**Note:** For safety reasons, lifting of the adjustable bed frame must be performed by two (2) people; and the unit should always be in a flat position before opening.


**NOTE:** To avoid damage to the foundation, always open the carton while the bed is in the flat position.



1. Lift the folded bed frame & put it on a flat floor

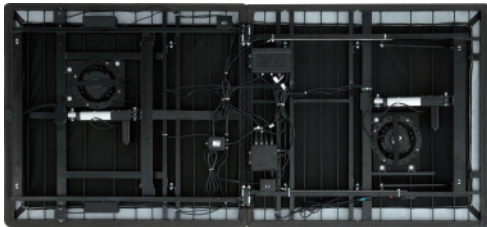

2. Thread the bolt of the leg to the nut on the foundation frame, and tighten by hand. DO NOT OVERTIGHTEN.

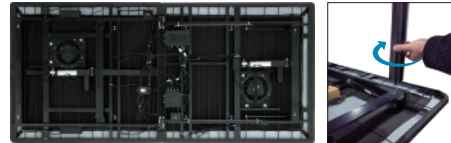

3. Carefully flip the foundation over onto its legs, and then Locate the mattress retainer bar brackets.

*Important: Two people are required to move the foundation.*

*Do not drag across the floor. Do not rest frame on its side; excessive pressure may damage the legs.*



4. Uncoil the input power cord (connected to the control box's power port) and plug it into the power supply.

Uncoil the power cord and connect it to the power supply.





## Remote Control Instructions




### **WARNING**

- Excessive use of the massage motors, over 30 minutes at a time, will cause the motor to shut down and possibly overheat.
- Do not use massage for more than 30 minutes at a time.
- Turn massage back on after 30 minutes rest to prevent damage to the motors or the adjustable base.

## Child Lock & Under Bed Lighting





### Full-Child Lock Function

- To lock the whole remote, press & hold  button for about 5 seconds, the backlight blinks & you will hear 3 beeps, then the remote is locked;
- To unlock the whole remote, repeat the same step;






### Partial Child Lock Function

- To lock the acoustic message system (as the buttons marked in yellow color on below image ), press & hold   together for about 5 seconds, the backlight blinks & you will hear 2 beeps, then the buttons are locked;
- To unlock the acoustic message system, repeat the same step;



### Under Bed Lighting

- Press  button to turn on the lights;
- Press & hold  button for 3 seconds to turn off the lights, or the lights will turn off automatically after keep on for 5 minutes;
- Click  button 1~7 times, the light will change to different colors;

**Note: The under bed lighting turns off automatically after 5 minutes.**

## Acoustic massage system

---



### Bluetooth on/off

---

Press this button, you will hear “Bluetooth on, please wait” from speaker, then please turn on the bluetooth on your phone, select the base and connect it to you phone. Once you hear “Bluetooth connected”, you can hear the music played by your phone from the speaker underneath the base. To turn off the bluetooth, just press the button again. When bluetooth is off, the base cannot be found, there will be no response from the buttons of acoustic system (as the buttons marked by yellow color in last page).



### Volume up

---

Press this button to increase volume, and the intensity of acoustic massage will increase with the volume;



### Volume down

---

Press this button to decrease the volume, and the intensity of acoustic massage will decrease with the volume;



### Acoustic massage strength

---

Click this button and the acoustic massage intensity will cycle as low-med-high-off; Indicator light will be white color for low level, white & red color for medium level, red & red color for high level;



### Pause/play music

---

Press this button to pause or play music;



### Go back to last music track

---

Press this button, it will go back to last music track;



### Skip to next music track

---

Press this button, it will skip to next music track;

**Note: If adjust head or foot section when the acoustic massage is on, the acoustic massage intensity will reduce to low level. Once the adjustment of head or foot section is done, the acoustic massage intensity will recover to the original level.**

## Positions & Presets

---



### Head Position Adjustments

---



Press and hold the Head Up or Head Down button to raise or lower the head section of your bed;



### Foot Position Adjustments

---



Press and hold the Foot Up or Foot Down button to raise or lower the foot section of your bed;



### Memory

---

Press this button to move the bed into the position stored in the memory. To save bed position to the button, see "Setting memory position";



### Flat

---

Press this button to return the bed to a flat position;



### Zero Gravity

---

Press this button to elevate your legs slightly higher than the chest, in effect, allowing the blood to flow back to the heart to help reduce stress and fatigue;



### Anti Snore

---

Press this button to gently raise the head section and allow easier air intake to help reduce snoring;

## Massage

---



### Timer

---

Press this button to set the timer for the massage to automatically turn off. You can choose from 10-minute, 20-minute, and 30-minute durations;



### Head Massage

---

Press this button to turn on the massage at head section and change the intensity(low-med-high-off) of the massage; Indicator light will be white color for low intensity, white & red color for medium intensity, red & red color for high intensity;



### Foot Massage

---

Press this button to turn on the massage at foot section and change the intensity(low-med-high-off) of the massage; Indicator light will be white color for low intensity, white & red color for medium intensity, red & red color for high intensity;



### Mode

---

Press this button to select between three different massage modes.(CONSTANT—PULSE—WAVE)

**Note: The massage turns off automatically after 30 minutes.**

## Remote Control Instructions - Pairing Remote & Setting Memory Position

The original remote that comes in the box is already paired to the foundation. No further action is required. In the event that the remote is not paired with the foundation, follow the steps below.



### STEP 1

Make sure the batteries in remote work fine. Replace them when necessary.



### STEP 2

Plug the power cord to the power source.

### STEP 3

Press & hold buttons of head up and foot up simultaneously, and then press & hold the blue button on the cord that connected to the power supply. Once you hear beeps, it is paired.



The Memory Position is a programmable feature that allows you to save custom position. Please follow below instructions to set your personal favorite positions.

### STEP 1

Adjust the head and foot section to your desired position. (image 1)

### STEP 2

Press and hold the flat button (FLAT) first, then press and hold memory button (M) for 5 seconds until you hear 2 beeps sound. (image 2)



image 1



image 2

### STEP 3

To adjust the saved position, repeat steps 1 & 2, and the new position will be saved.

## Synchronizing Two Bases - Usage of Sync Cord

*Attention: To synchronize two bases, only one sync cord is needed.*



### STEP 1

---

Plug Base A & Base B to power source respectively.

### STEP 2

---

Make sure remote A is already paired to base A, and remote B is paired to base B. If not, please follow the instruction of pairing remote on page 8.

(To avoid confusion, label the remote with the "A" and "B" sticker labels included.)

### STEP 3

---

Plug sync cord into the "SYNC" input on the control box of both base A and base B (see image).

Now you can operate the base as Whole-Peice King or Flex-Head King. Please follow the next page for more details.







Sync Cord



Sync Input

## Instruction of pairing 4pcs bluetooth speakers of King base (2 x Twin XL)

1. Make sure bluetooth is on, and your phone is already connected with one bluetooth successfully. (refer to “bluetooth on/off” on page 08) .
2. To pair 4pcs speakers of King base(2 x Twin XL), press and hold  &  for about 5 seconds, the backlight blinks, and you will hear “pairing successful”, then the 2pcs speakers are paired.
3. To un-pair the bluetooth speakers, press and hold  &  for about 5 seconds, the backlight blinks, and you will hear “unpairing complete”, then the 2pcs speakers are un-paired.





## Synchronizing Two Bases - Mode Selection

Once the sync cord is plugged into the "SYNC" input, depending on the mattress used, you may operate them in Standard King Option or Flex-head King Option.

To switch the mode of Standard King Option & Flex-head King Option, press & hold the buttons of Anti Snore & Zero Gravity simultaneously for about 5 seconds until hear beep from control box. If beep once, it's Flex-head King Option; If beep twice, it's Standard King Option.



### Standard King Option

Head section of 2 bases will operate simultaneously;  
Foot section of 2 bases will also operate simultaneously.



### Flex-head King Option


Head section of 2 bases will operate separately;  
Foot section of 2 bases will operate simultaneously.

Note: You can only switch the mode of Standard King Option & Flex-head King Option by remote, cannot switch by Bluetooth APP.



## Instruction of AUX OUT cord

---

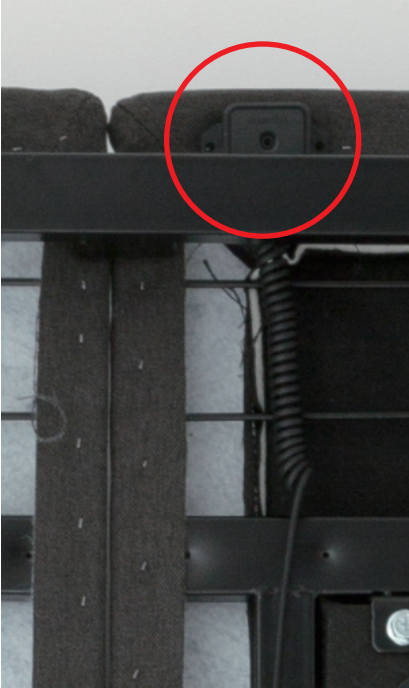




- To use headphones, plug the cord (not included) into this AUX OUT port;
- You can also connect the base to your home theater / stereo system by plugging the cord (not included) into this AUX OUT port.
- If bluetooth speakers of King base(2pcs TXL) have been paired by referring to step 2 on page 13, when you plug the headphone cord into one of the AUX OUT ports, and you wish to mute the sound from another base, please un-pair the bluetooth speakers first by referring to Step 3 on page 13.

## Instruction of Demo Mode



Definition of Demo Mode: It will play the music which pre-set in control box, and the intensity of acoustic massage will increase or decrease with the music.

Press & hold  and  simultaneously for about 3 seconds, the demo mode is on. Repeat the same step to turn off the demo mode.

When the demo mode is on, the bluetooth mode  is off by default. It means cannot play music by connecting the base with your phone.

A complete cycle of Demo Mode is 3 minutes.

## App Instructions

---

*Step 1: Plug base into power source*

*Step 2: Turn Bluetooth on in cell phone*

*Step 3: Install the APP*

---

Option 1)

- 1) Go to APP Store (IOS SYSTEM) /Google Store (ANDROID SYSTEM)
- 2) Type "Good Vibe Sleep" into search field and select APP, install APP onto cell phone .

Option 2)

Scan this QR code to APP stores for download.



#### Step 4: Control your base via Good Vibe Sleep APP

- 1) Open Good Vibe Sleep APP that was previously installed on cell phone as shown in picture below.



- 2) Refresh the list, then select your base by clicking the correct bluetooth code (Code can be found on the control box underneath base as well as head section, by lifting up the head section. Look for Bluetooth-Goodvibe Sleep code.).




- 3) After selecting your base, scan below QR code or type "FMRM" & click the **Q**, now you can see the operation center and control you base.



FMRM

(QR code can also be found on backside of remote)




#### Note:

There are 2 QR codes on backside of remote, please always scan the correct one, otherwise the BaseRemote APP would not operate your bed base successfully.



## Instruction of Using Plastic Connectors

In case of using two adjustable bases together (for King), a connector plate has been included in each box to attach the feet at the head and foot of the bed. In case a single bed is used, this connector plate is not necessary and may be discarded.

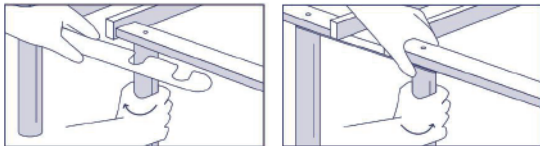


When synchronizing 2 bases as King, plastic connectors included can be used to prevent legs sliding on the floor. Three people are needed for the installation.

### STEP 1

Assemble 2 bases separately, and put them together next to each other.

### STEP 2

Connect the legs of head & foot sections by the plastic connectors. Two people are required to lift the King base, and the third person loosens the legs. Insert the connector above the legs (connector goes between the frame and the legs), and then re-tighten legs by hand.

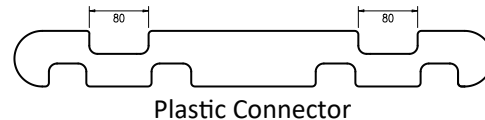

## Emergency Battery Backup

### Overview


Important: The backup battery is only to be used in case of a power outage. Batteries are not to be used for normal operation of the bed. The backup battery will not support repeated movement for an extended period of time.

### Backup Battery Use:

Use two 9V batteries only (not included). If a power outage occurs, install the 9V batteries into the power supply to allow temporary power to the base (see image A).

### Installing Batteries:

Unplug the power cord from the outlet and remove the cover from the compartment on the underside of the power supply (see image B). Place two 9V batteries inside, close the cover and plug the power cord back into the wall outlet. The backup battery will not support repeated movement for extended periods of time. After power is restored, unplug power cord, remove the batteries, then plug the power cord back into the wall for normal use.

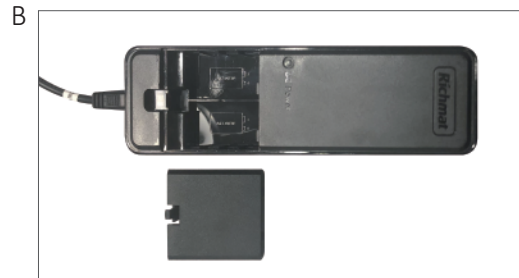

## Troubleshooting

In the event that the adjustable base fails to operate, assess the symptoms and possible solutions provided in the chart below.

SYMPTOMS	SOLUTIONS
Remote control illuminates and appears to be operable, but will not activate bed.	Verify that the power cord is plugged into a working, grounded electrical outlet. Test the outlet by plugging in another working appliance.
No features of the power foundation will activate.	<p>Program the remote control (see the Setting Programmable Positions and Pairing Remote section of this manual for programming procedures).</p> <p>Unplug the power cord, wait 30 seconds and plug back to reset electronic components.</p> <p>The surge protection device or the electrical outlet may be defective. Test the outlet by plugging in another working appliance.</p> <p>Verify that the connector on the wired remote control is securely attached to the control box.</p>
Wireless remote will not illuminate.	Replace the batteries in the wireless remote.
Head or foot section will elevate, but will not return to the horizontal (flat) position.	<p>Bed mechanism may be obstructed. Elevate bed and check for obstruction. Remove obstruction.</p> <p>Head section may be too close to the wall.</p> <p>Headboard may be too close to the edge of the mattress. Verify that there is enough distance between the headboard brackets and mattress. Adjust if required.</p>



<p>Head &amp; Foot lift function has minor interference during operation.</p>	<p>Check batteries in wireless remote control, replace with two (2) new AAA batteries if necessary.</p> <p>Make sure that you are following the duty cycle of the motors (do not operate more than two minutes over a 18-minute period, or approximately 10% duty cycle).</p> <p>Press the lift buttons squarely and accurately.</p> <p>Wireless remote control may be experiencing common Radio Frequency Interference from other radio transmitting devices. Wait several seconds, and then try pressing appropriate button again, See FCC Compliance Statement on page 5 of this guide.</p>
<p>Excessive massage motor noise.</p>	<p>If the bed is located on hard surface flooring, place carpet pieces or rubber pieces (not included) under each leg.</p> <p>Using the wireless remote control, elevate the head, foot or neck section a short distance to realign the lift/lower mechanisms with the bed support platform.</p> <p>Verify that your Power Foundation is not positioned against a wall, nightstand, or other object that may cause the vibration or noise.</p> <p>If the Power Foundation is installed over a bed frame, verify that the massage motors are not causing the bed frame (or bed frame components) to vibrate.</p> <p>Verify that the headboard attachment hardware is properly tightened (if used).</p>

SYMPTOMS	SOLUTIONS
A clicking noise is heard under the bed when raising or lowering.	This is normal. The lift motor relays “click” when they are engaged. No action is required.
Massage motor overheats or stops.	If the vibration motor overheats, the thermal protection will turn the motor off. Wait 30 minutes, turn the massage back on. If it does not come on, turn it off and report the situation to customer service.





Customer Service: 1-855-430-8943

Serial No.

2-Year Warranty | Parts and Labor