

**Test Report**

Number: SHAH01648481

Applicant: ANHUI HARLEY BABY CAR CO., LTD  
NO.18 PENGLIN ROAD, DASHU TOWN,  
QUANJIAO COUNTY, CHUZHOU CITY,  
ANHUI PROVINCE, CHINA.

Date: 01 Feb, 2024

Sample Description:

One (1 ) piece of submitted sample said to be :  
Item Name : Children Car .  
Item No. : AHL015.  
Labelled Age Group : 3+ Years.  
Packaging Provided By Applicant : Yes.  
Country Of Origin : China


Tests Conducted:

As requested by the applicant, for details refer to attached page(s).

Conclusion:

<u>Tested Samples</u>	<u>Standard</u>	<u>Result</u>
Submitted Sample Set	ASTM F963-17 Section 4.25, 5.15, 6.5, 6.6 and 7.2 for Battery-Powered Ride-On Toys	Pass
Submitted Sample Set	ASTM F963-23 Section 4.25, 5.14, 6.5, 6.6, 6.9 and 7.2 for Battery-Powered Ride-On Toys	Pass

Prepared And Checked By:  
For Intertek Testing Services Wuxi Ltd.



Bill Zhang  
General Manager



## Test Report

Number: SHAH01648481

### Tests Conducted

#### 1 Battery Powered Ride-On Toys

As per ASTM F963-17 consumer safety specification for toy safety section 4.25, 5.15, 6.5, 6.6 and 7.2.

Applicant's specified age group for testing: For ages over 3 years

Type of battery: Vehicle: 12 V 4.5-4 AH, Lead-acid rechargeable battery X 1pc;  
Remote: 3V, AAA size X 2 pcs

Charger type: Input 100-120 V A.C., Output 12 V D.C. (Provided)  
Model: HK012-120100AXU

Electric operated function: Battery powered motion, sound and LED light.

<u>Section</u>	<u>Testing items</u>	<u>Assessment</u>
4.25.1	Battery marking	P
4.25.2	Maximum allowable direct current potential	P
4.25.3	Protection against charging non-rechargeable battery	P
4.25.4	Accessible batteries	NA
4.25.5	Accessible batteries that can fit completely within small part cylinder	P
4.25.6	Isolation of batteries of different types or capacities	NA
4.25.7	Temperature of battery surface	P
4.25.8	Temperature of battery surface or combustion hazard after normal use and abuse test	P
4.25.9	Packaging and Instruction requirement	P
	- 5.15 Non-replaceable battery statement in battery operated toys	P
	- 5.15.2 Button or coin cell batteries	NA
	- 6.5 Instruction on safe usage of battery	P
4.25.10	Battery-powered ride-on toys	P
4.25.10.1	The maximum temperature measured on the insulation of any conductor shall not exceed the temperature rating of the material.	P
4.25.10.2	Battery powered ride on toys shall not present a risk of fire in stalled motor test.	P
4.25.10.3	A battery powered ride on toy designed with a wiring system that has a user replaceable device (fuse type) for the primary circuit protection or a wiring system with user resettable primary circuit protection (manual reset fuse) shall not actuate (open or trip) when tested in accordance with the nuisance tripping test	NA
4.25.10.4	Switches used in battery powered ride on toys. - Polymeric materials in switches used in battery powered ride on toys that are used to support current carrying parts shall carry a minimum flame rating of UI-94 V-0 or have a glow wire ignition rating of 750°C. - The switch body shall not result in a short circuit condition when subjected to the switch endurance test and overload tests. - The switch shall not fail in a mode that could cause the vehicle to run continuously (switch stuck in the "on" position) when subjected to the endurance test and the overload test.	P
4.25.10.5	User replaceable circuit protection devices in battery powered ride on toys. - User replaceable circuit protection devices provided by the manufacturer in battery-powered ride-on toys shall be listed, recognized or certified by a Nationally Recognized Test Laboratory (NRTL) (that is, a laboratory	NA



**Test Report**

Number: SHAH01648481

Tests Conducted

	recognized in accordance with 29 CFR 1910) to an appropriate electrical safety standard.	
	- All circuit protection devices used in battery powered ride on toys intended to be replaced by the user shall be replaceable only with the use of a tool or by a design which does not easily allow tempering such as a design requiring excessive force to open.	
4.25.10.6	Batteries and battery chargers. - Battery connectors must be constructed of material with a UL94 V-0 flame rating or have a glow wire ignition rating of 750°C. - The battery charging system shall not present a risk of fire due to a short circuit condition applied to any point in the length of a charger/battery. - During charging, battery-charging voltages shall not exceed the recommended charging voltages. - Battery charges must be certified to the appropriate standard body. Reference document of certified body: UL E504979	P
4.25.10.7	Wiring connected to the main/motor battery shall be short circuit protected and shall not present the risk of fire.	P
4.25.10.8	Strain relief shall be provided to prevent mechanical stress on wires entering a connector block during routine maintenance.	P
4.25.10.9	Battery powered ride on toys shall comply with the requirements for safety labelling, for additional instructional literature, and for required producer's markings. - 5.15.1 Safety warnings of battery powered ride on toys - 6.6 Instructions - 7.2 Producer's marking	P
4.25.11	Toys that contain secondary cells or secondary batteries	NA

Remark: P = Pass NA = Not Applicable

Date Sample Received: 02 Jan, 2024

Testing Period: 02 Jan, 2024 To 31 Jan, 2024

\*\*\*\*\*



## Test Report

Number: SHAH01648481

### Tests Conducted

#### 2 Battery Powered Ride-On Toys

As per ASTM F963-23 Consumer Safety Specification for Toy Safety Section 4.25, 5.14, 6.5, 6.6, 6.9 and 7.2

Applicant's specified age group for testing: For ages over 3 years

Type of battery: Vehicle: 12 V 4.5-4 AH, Lead-acid rechargeable battery X 1pc;  
Remote: 3V, AAA size X 2 pcs

Charger type: Input 100-120 V A.C., Output 12 V D.C. (Provided)  
Model: HK012-120100AXU

Electric operated function: Battery powered motion, sound and LED light.

<u>Section</u>	<u>Testing items</u>	<u>Assessment</u>
4.25.1	Battery marking	P
4.25.2	Maximum allowable direct current potential	P
4.25.3	Protection against charging non-rechargeable battery	P
4.25.4	Batteries accessible	P
4.25.5	Isolation of batteries of different types or capacities	NA
4.25.6	Temperature of battery surface	P
4.25.7	Temperature of battery surface or combustion hazard after normal use and abuse test	P
4.25.8	Packaging and Instruction requirement	P
	- 5.14 Non-replaceable battery statement in battery operated toys	P
	- 5.14.2 Button or coin cell batteries	NA
	- 6.5 Instruction on safe usage of battery	P
	- 6.9 Toys which require a manufacturer-supplied specialty or custom tool to access the battery(ies)	NA
4.25.9	Battery-powered ride-on toys	P
4.25.9.1	The maximum temperature measured on the insulation of any conductor shall not exceed the temperature rating of the material.	P
4.25.9.2	Battery powered ride on toys shall not present a risk of fire in stalled motor test.	P
4.25.9.3	A battery powered ride on toy designed with a wiring system that has a user replaceable device (fuse type) for the primary circuit protection or a wiring system with user resettable primary circuit protection (manual reset fuse) shall not actuate (open or trip) when tested in accordance with the nuisance tripping test.	NA
4.25.9.4	Switches used in battery powered ride on toys.	P
	- Polymeric materials in switches used in battery powered ride on toys that are used to support current carrying parts shall carry a minimum flame rating of UI-94 V-0 or have a glow wire ignition rating of 750°C.	
	- The switch body shall not result in a short circuit condition when subjected to the switch endurance test and overload tests.	
	- The switch shall not fail in a mode that could cause the vehicle to run continuously (switch stuck in the "on" position) when subjected to the endurance test and the overload test.	



**Test Report**

Number: SHAH01648481

Tests Conducted

4.25.9.5	User replaceable circuit protection devices in battery powered ride on toys. - User replaceable circuit protection devices provided by the manufacturer in battery-powered ride-on toys shall be listed, recognized or certified by a Nationally Recognized Test Laboratory (NRTL) (that is, a laboratory recognized in accordance with 29 CFR 1910) to an appropriate electrical safety standard. - All circuit protection devices used in battery powered ride on toys intended to be replaced by the user shall be replaceable only with the use of a tool or by a design which does not easily allow tempering such as a design requiring excessive force to open.	NA
4.25.9.6	Batteries and battery chargers. - Battery connectors must be constructed of material with a UL94 V-0 flame rating or have a glow wire ignition rating of 750°C. - The battery charging system shall not present a risk of fire due to a short circuit condition applied to any point in the length of a charger/battery. - During charging, battery-charging voltages shall not exceed the recommended charging voltages. - Battery charges must be certified to the appropriate standard body. Reference document of certified body: UL E504979	P
4.25.9.7	Wiring connected to the main/motor battery shall be short circuit protected and shall not present the risk of fire.	P
4.25.9.8	Strain relief shall be provided to prevent mechanical stress on wires entering a connector block during routine maintenance.	P
4.25.9.9	Battery powered ride on toys shall comply with the requirements for safety labelling, for additional instructional literature, and for required producer's markings. - 5.14.1 Safety warnings of battery powered ride on toys - 6.6 Instructions - 7.2 Producer's marking	P
4.25.10	Toys that contain secondary cells or secondary batteries	NA

Remark: P = Pass NA = Not Applicable

Date Sample Received: 02 Jan, 2024  
Testing Period: 02 Jan, 2024 To 31 Jan, 2024

\*\*\*\*\*



**Test Report**

Number: SHAH01648481

Tests Conducted

Photo



<p>The model shown does not comply for CE mark labelling.</p> <p><b>BATTERY OPERATED TOYS</b></p> <p>Item: AHL815          COLOR: WHITE          QTY: 1PC/CTN          N.W: 16.5 KGS          G.W: 18.5 KGS          MEAS: 69X36X35CM</p>	<p>The model shown does not comply for CE mark labelling.</p> <p><b>BATTERY OPERATED TOYS</b></p> <p>Item: AHL815          COLOR: WHITE          QTY: 1PC/CTN          N.W: 16.5 KGS          G.W: 18.5 KGS          MEAS: 69X36X35CM</p>
---	---


**AGES 3+**

**CAUTION**  
 Adult Assembly Required. Take care during unpacking and assembly as product has small parts. Reused Rechargeable battery must be recycled or disposed of properly. Batteries are to be inserted with the correct polarity. Top must be assembled by adult before use. Retain all retail instructions for future reference.

**WARNING: CHOKING HAZARD** - Small parts. Not for children under 3 years.

**CAUTION - ELECTRIC TOY** - Not recommended for children under 3 years of age. As with all electrical products, precautions should be observed during handling and use to reduce the risk of electric shock or injury.

**WARNING:**  
 To reduce the risk of injury, adult supervision is required. Never use in moisture, near water, or near open flames or heat, including stoves or other heat sources. Always use with care, and never after more than one year.

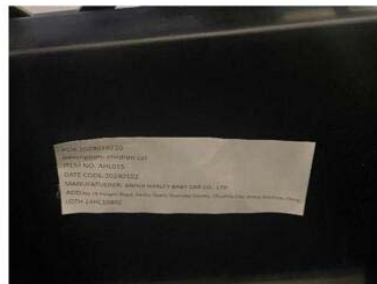

\*\*\*\*\*



## Test Report

Number: SHAH01648481

Tests Conducted

The Samples Were Submitted By The Client, Only For Reference.



\*\*\*\*\*  
End Of Report

*The statements of conformity reported have considered the decision rule agreed, namely that Intertek have taken account of measurement uncertainty as calculated by Intertek, and applied according to ILAC-G8/09:2019 (Non-binary acceptance based on guard band  $w = U$ ) except designation from the customer, regulation or test specification. This decision rule only applies to the numeric test results.*

*The sample(s) and sample information hereto are provided by the client who shall be solely responsible for the authenticity and integrity thereof. The results shown in this report relate only to the sample(s) received and tested. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. This report shall not be reproduced unless with prior written approval from Intertek Testing Services Wuxi Ltd.*

